

**BALDOR® • RELIANCE™**

---

# Customer information packet

## EMVM3554D

1.1KW, 1770RPM, 3PH, 60HZ, D90SD, LD, 3524M, TE

Class - None

Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.

6/9/2025 4:38:28 AM

## Specifications

Enclosure	TEFC
Frame	D90SD,LD
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	1.100 KW @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA NEMA PREMIUM NEMA_PREMIUM UR WEEE
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.640 A @ 208.0 V 4.600 A @ 230.0 V 2.300 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

## Part detail

Revision	C
Type	AC
Mech. spec.	35Q175
Base	
Status	PRD/A
Elec. spec.	35WGL955
Layout	35LYQ175
Eff. date	06-04-2025
CD Diagram	CD0005
Poles	04
Leads	9#18
Proprietary	False
Created date	01-10-2022

Frame Prefix	D
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.3 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	M
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	IEC
Motor Type	3524M
Mounting Arrangement	B5
Number of Poles	4
Overall Length	12.99 IN
Power Factor	72
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	D-Flange
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.945 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

**Winding Thermal 2**

**None**

---

**Nameplate**

<b>NP2672L</b>									
<b>CAT.NO.</b>	EMVM3554D								
<b>SPEC.</b>	35Q175L955G1								
<b>IEC FRAME</b>	D90SD,LD	<b>KW</b>	1.1						
<b>VOLTS</b>	230/460								
<b>AMP</b>	4.6/2.3								
<b>RPM</b>	1770	<b>ENCL</b>	TEFC						
<b>HZ</b>	60	<b>PH</b>	3	<b>CL</b>	F				
<b>SER.F.</b>	1.15	<b>DES</b>	B	<b>CODE</b>	M				
<b>NEMA-NOM-EFF</b>	86.5	<b>I.P.</b>	54						
<b>RATING</b>	40C AMB-CONT								
<b>CC</b>	010A	<b>USABLE AT 208V</b>	N/A						
<b>DE</b>	6205	<b>ODE</b>	6203						
<b>SER. #</b>	SFA 4.68/2.34								

**AC Induction Motor Performance Data**

Record # 95400

Typical performance - not guaranteed values

Winding: 35WGL955-R011		Type: 3524M		Enclosure: TEFC	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>		
Rated Output (KW)	1.1	Full Load Torque	4.39 LB-FT		
Volts	230/460	Start Configuration	direct on line		
Full Load Amps	4.6/2.3	Breakdown Torque	18.8 LB-FT		
R.P.M.	1770	Pull-up Torque	9.6 LB-FT		
Hz	60 Phase	3	Locked-rotor Torque	12.6 LB-FT	
NEMA Design Code	B	KVA Code	M	Starting Current	19.7 A
Service Factor (S.F.)	1.15	No-load Current	1.51 A		
NEMA Nom. Eff.	86.5	Power Factor	72	Line-line Res. @ 25°C	11.8 Ω
Rating - Duty	40C	AMB-CONT	Temp. Rise @ Rated Load		
S.F. Amps	5/2.5		Temp. Rise @ S.F. Load		
			Locked-rotor Power Factor		
			Rotor inertia		
			0.173 lb-ft <sup>2</sup>		

**Load Characteristics 460 V, 60 Hz, 1.1 KW**

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	30	49	62	71	77	81	75
Efficiency	75	83.4	85.9	86.4	85.8	84.8	86
Speed	1792	1785	1778	1769	1760	1751	1764
Line amperes	1.56	1.71	1.95	2.25	2.61	3.02	2.47


ABB Motors and Mechanical Inc.

WINDING # 35WGL955


Typical performance - not guaranteed values.

1.1 KW 3 PH 60 HZ 1770 RPM 460 V 3524M


TORQUES (LB-FT): PO=18.8 PU=9.6 LR=12.6 LRA=19.7

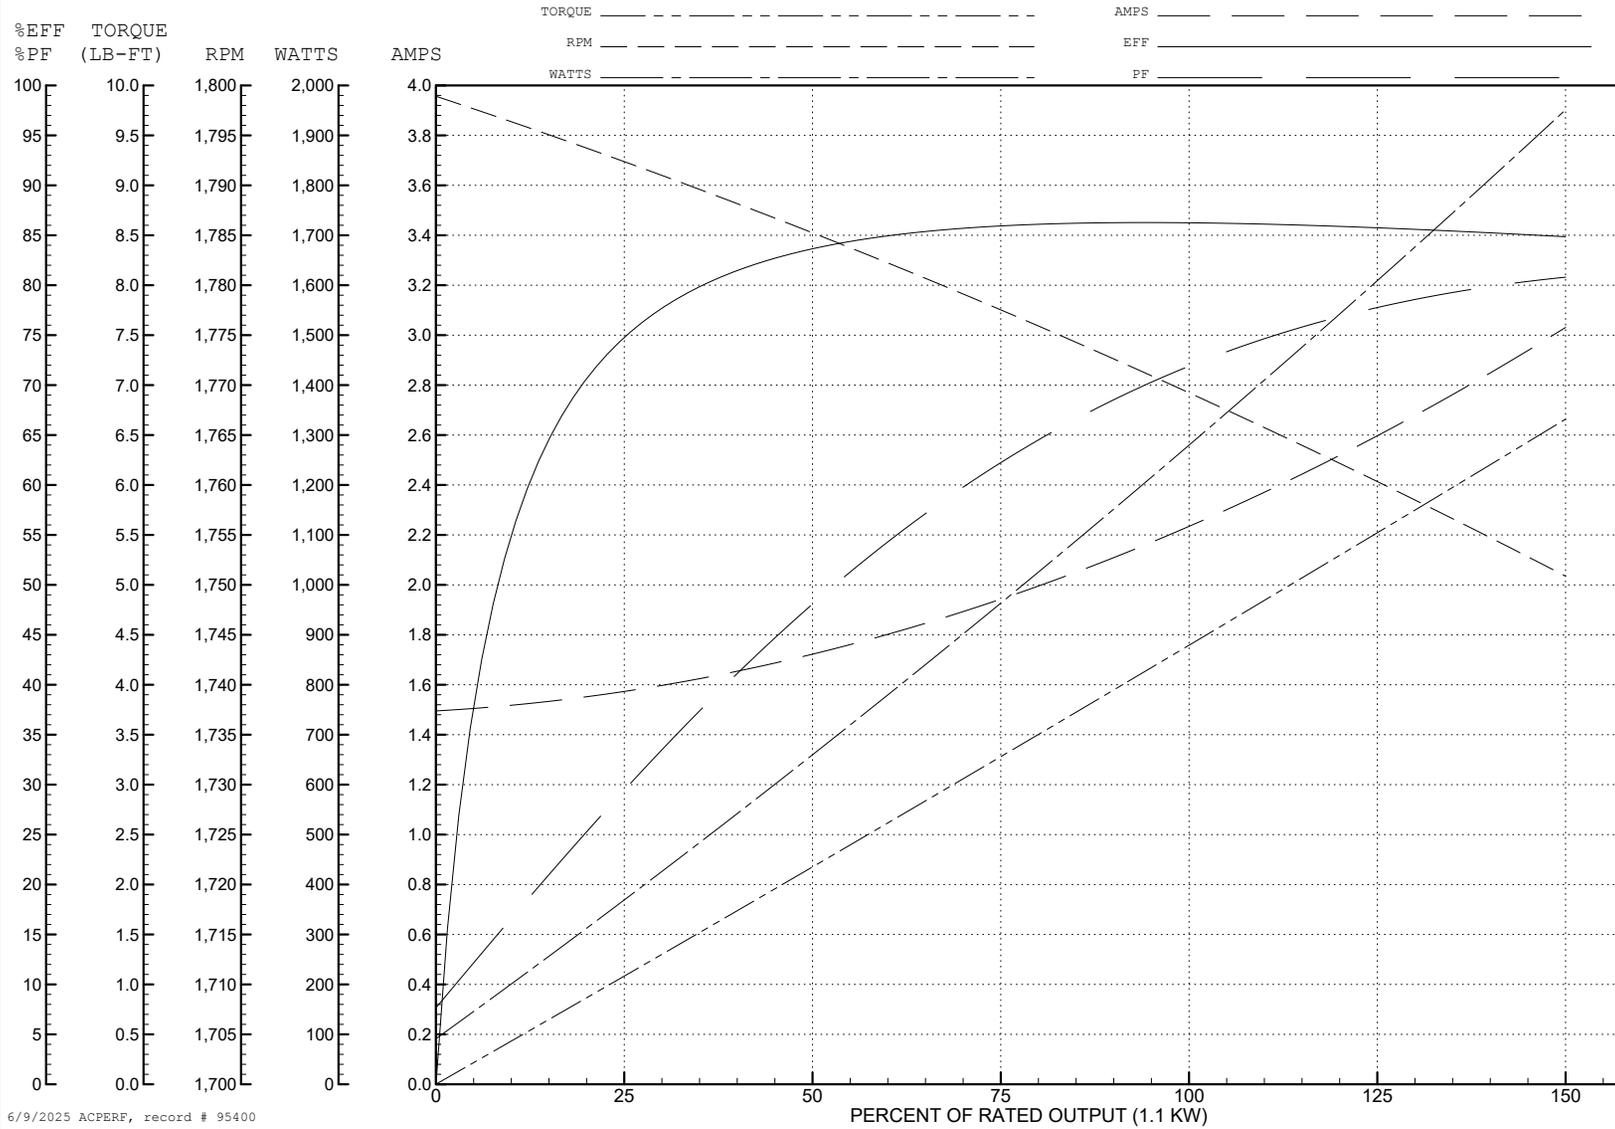

6/9/2025 ACPERF, record # 95400

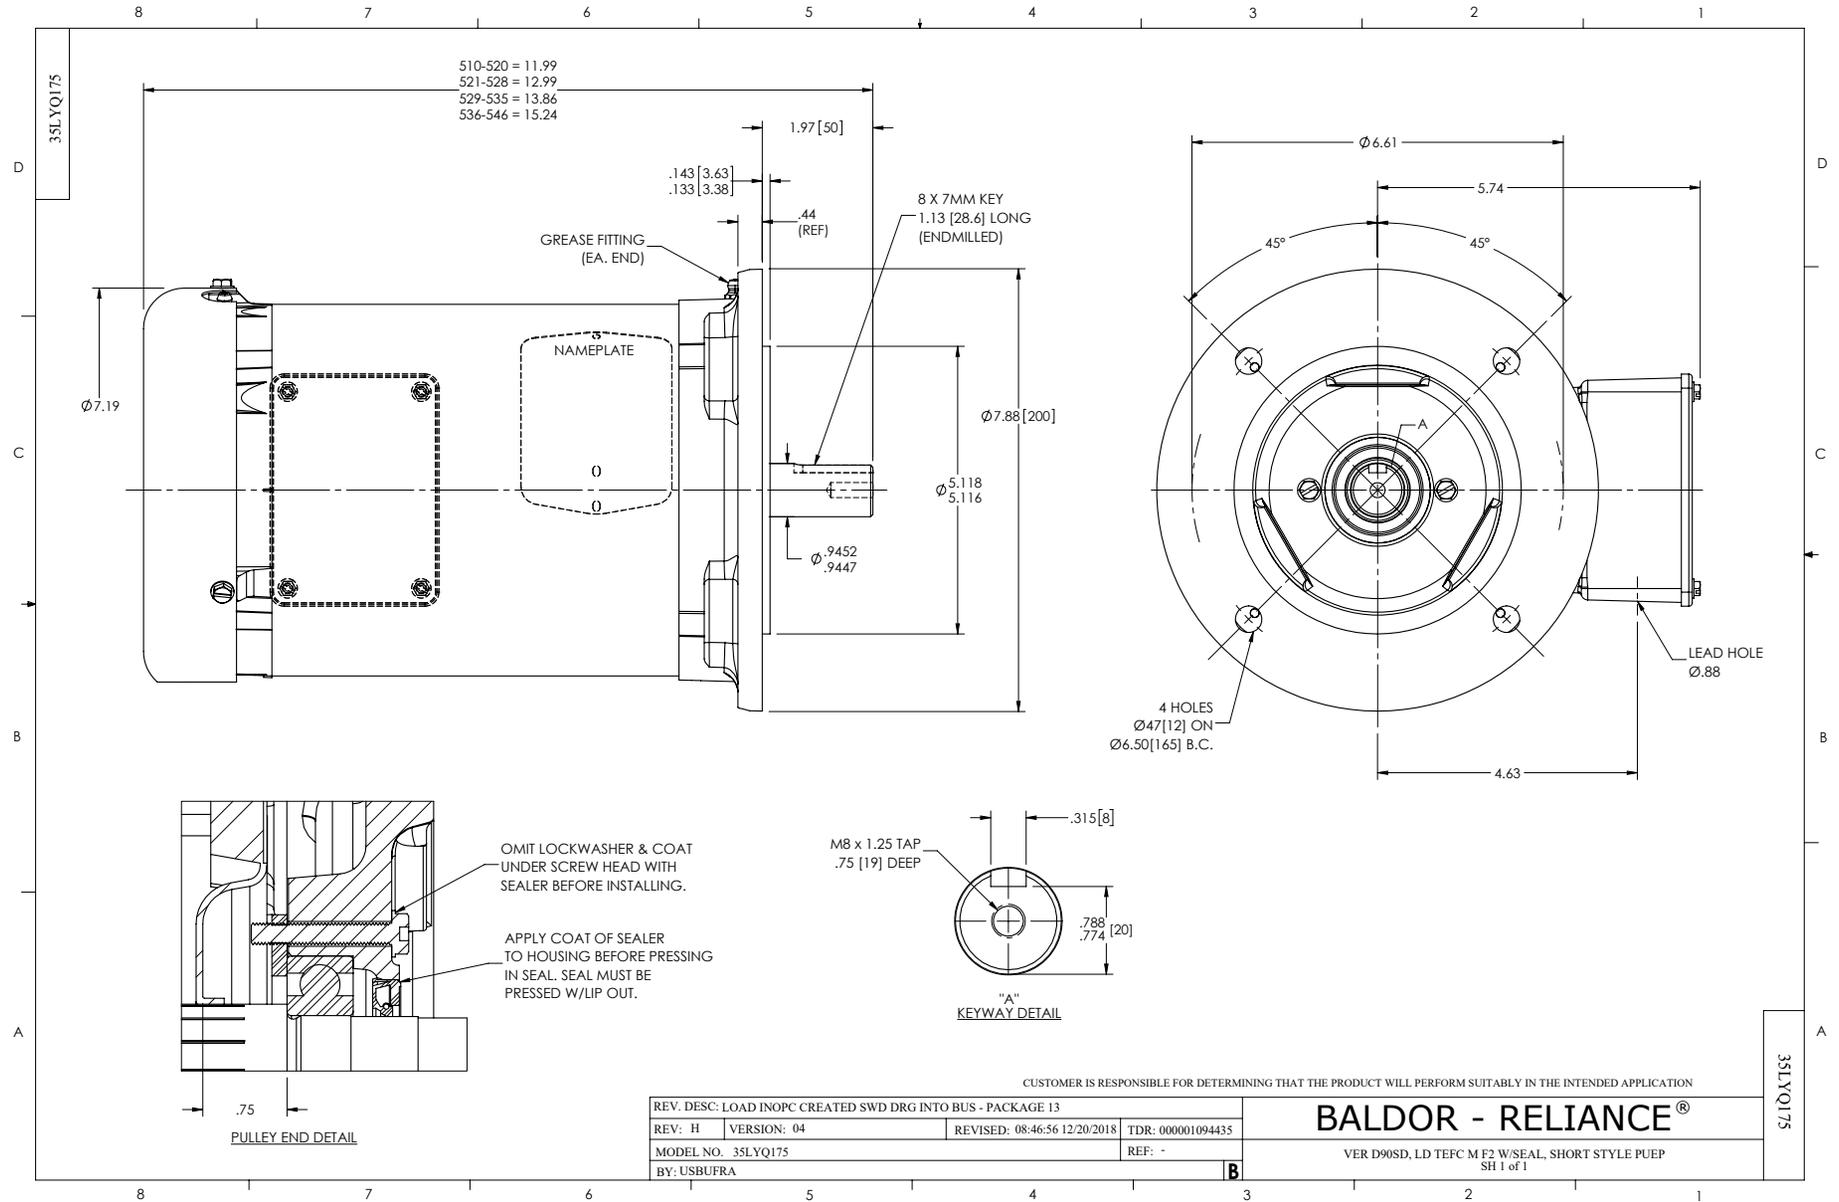

CD0005

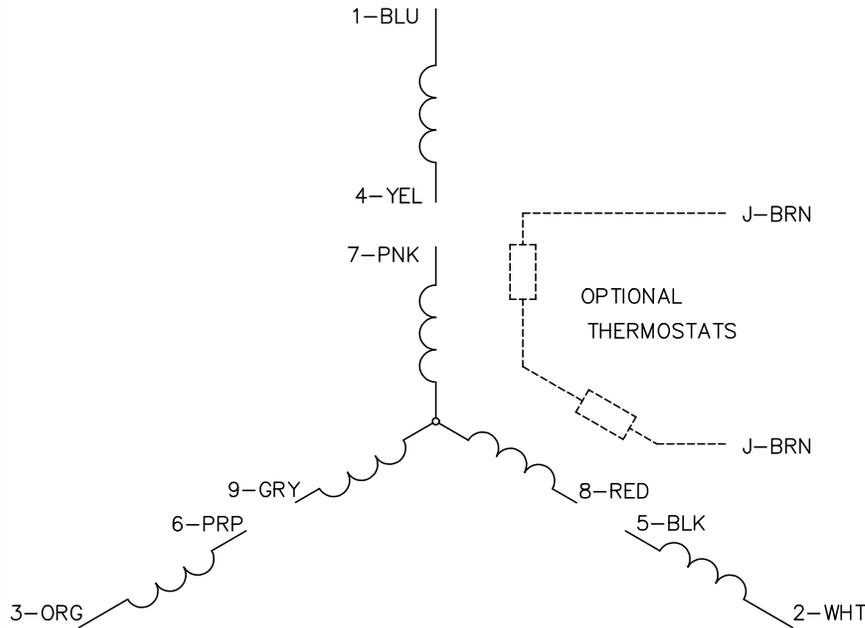

LOW VOLTAGE  
(2Y)



LINE

HIGH VOLTAGE  
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

3PH, DV, 9 LEADS