



Customer information packet

JSL725A

2HP, 3450RPM, 1PH, 60HZ, 3528L, N

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	56YZ
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	2.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	11.000 A @ 230.0 V 13.300 A @ 208.0 V 22.000 A @ 115.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	74.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Terminal Panel
Front Shaft Indicator	None
Heater Indicator	No Heater

Part detail

Revision	S
Type	AC
Mech. spec.	35E2011
Base	
Status	PRD/A
Elec. spec.	35WGL467
Layout	35LYE2011
Eff. date	05-07-2024
CD Diagram	CD0203
Poles	02
Leads	4#14 A&J,1#18 B PH,1#12 #1TH
Proprietary	False
Created date	01-26-2016

High Voltage Full Load Amps	11.0 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Terminal Panel
Motor Lead Quantity/Wire Size	4 @ 14 AWG, A&J
Motor Lead Termination	None
Motor Standards	NEMA
Motor Type	3528L
Mounting Arrangement	F1
Number of Poles	2
Overall Length	14.81 IN
Power Factor	81
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Pool Pump
Pulley Shaft Indicator	Ext Thread & Tapped Hole
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.20
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Fixed Opposite Standard
Shaft Slinger Indicator	Shaft Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 1 Location	EP
Winding Thermal 2	None

Nameplate

NP1257L									
CAT.NO.	JSL725A								
SPEC.	35E2011L467G1								
HP	2								
VOLTS	115/230								
AMP	22/11								
RPM	3450								
FRAME	56YZ			HZ	60		PH	1	
SER.F.	1.20	CODE	J	DES	L	CL	B		
NEMA-NOM-EFF	74	PF	81						
RATING	40C AMB-CONT								
CC									
DE	6203	ODE	6203						
ENCL	OPSB	SN							
	SFA 25.2/12.6								

AC Induction Motor Performance Data

Record # 54667

Typical performance - not guaranteed values

Winding: 35WGL467-R001				Type: 3528L		Enclosure: OPEN	
Nameplate Data				115 V, 60 Hz: Low Voltage Connection			
Rated Output (HP)		2		Full Load Torque		3.05 LB-FT	
Volts		115/230		Start Configuration		direct on line	
Full Load Amps		22/11		Breakdown Torque		8.39 LB-FT	
R.P.M.		3450		Pull-up Torque		4.22 LB-FT	
Hz		60		Phase		1	
NEMA Design Code		L		KVA Code		J	
Service Factor (S.F.)		1.2		No-load Current		11.8 A	
NEMA Nom. Eff.		74		Power Factor		81	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		47°C	
S.F. Amps		25.2/12.6		Temp. Rise @ S.F. Load		56°C	
				Locked-rotor Power Factor		76.7	
				Rotor inertia		0.0774 LB-FT2	

Load Characteristics 115 V, 60 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	49	65	76	81	85	86	84
Efficiency	50.8	67.3	71	74.8	73.8	71.5	74
Speed	3571	3551	3525	3501	3472	3434	3478
Line amperes	13	15.1	18.6	21.8	26	31.2	25.2


ABB Motors and Mechanical Inc.


WINDING # 35WGL467

Typical performance - not guaranteed values.


2 HP 1 PH 60 HZ 3450 RPM 115 V 3528L

TORQUES (LB-FT): PO=8.39 PU=4.22 LR=6.51 LRA=130

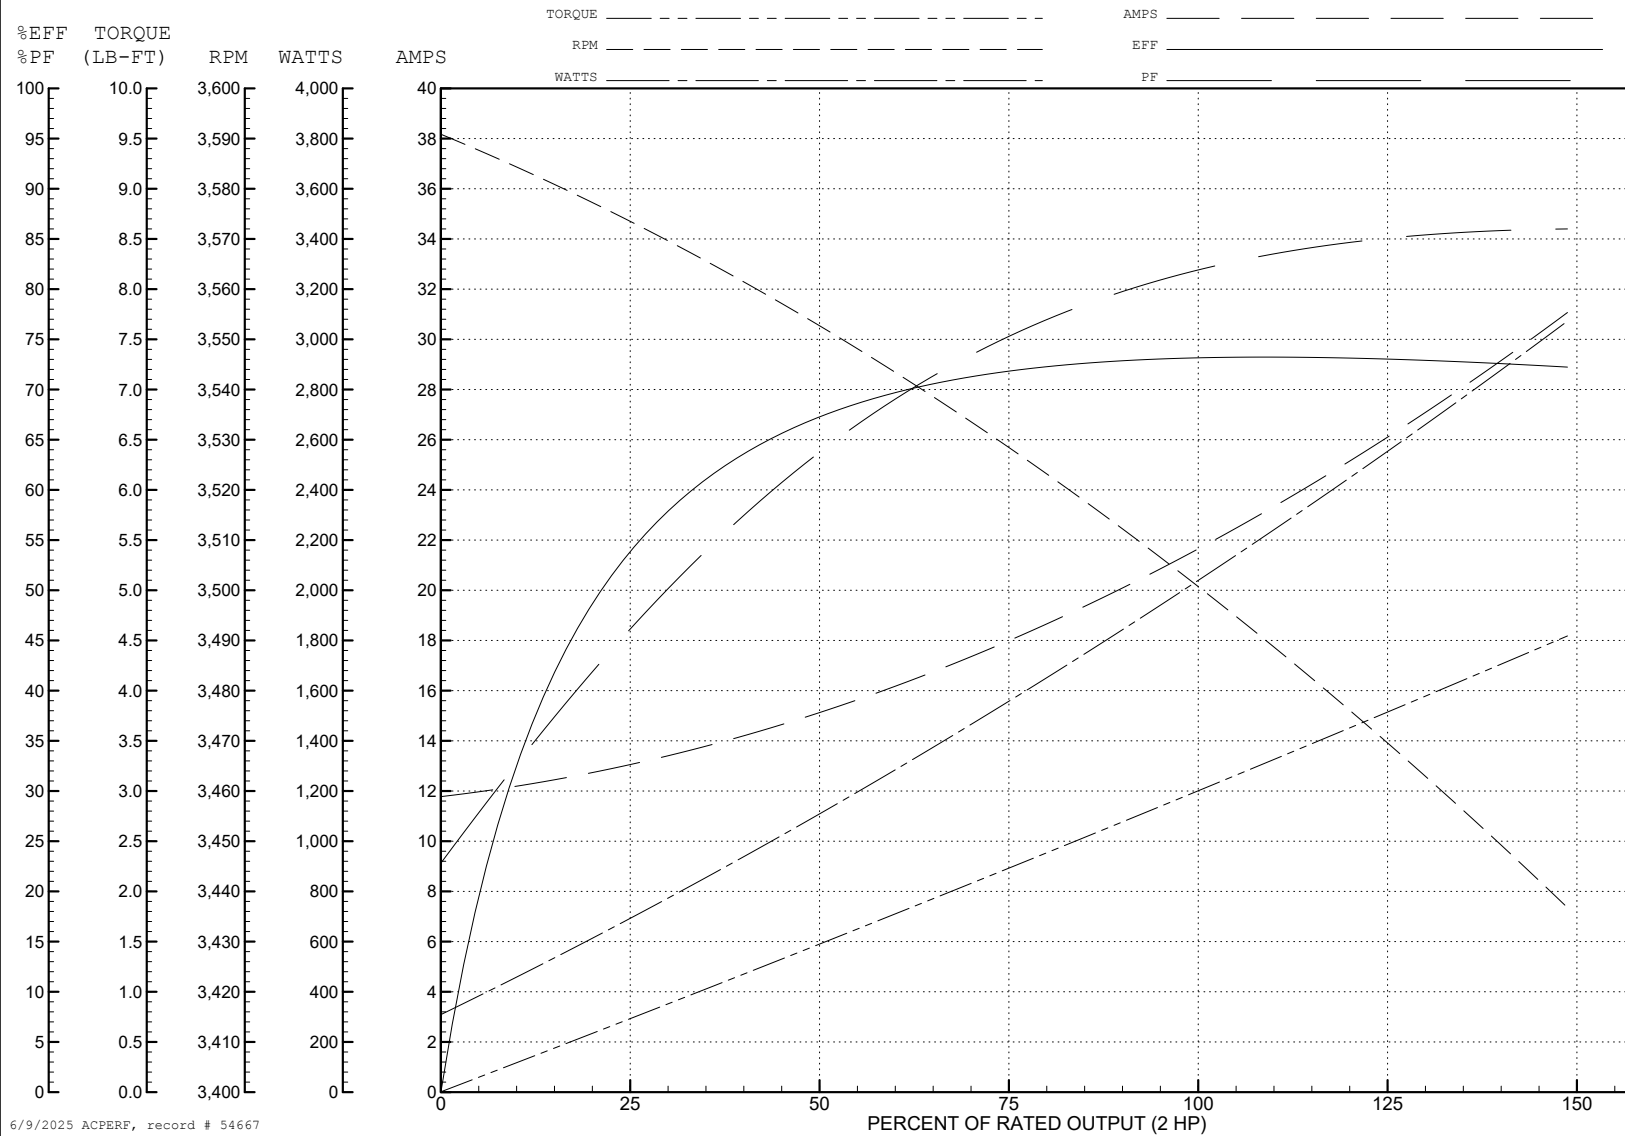

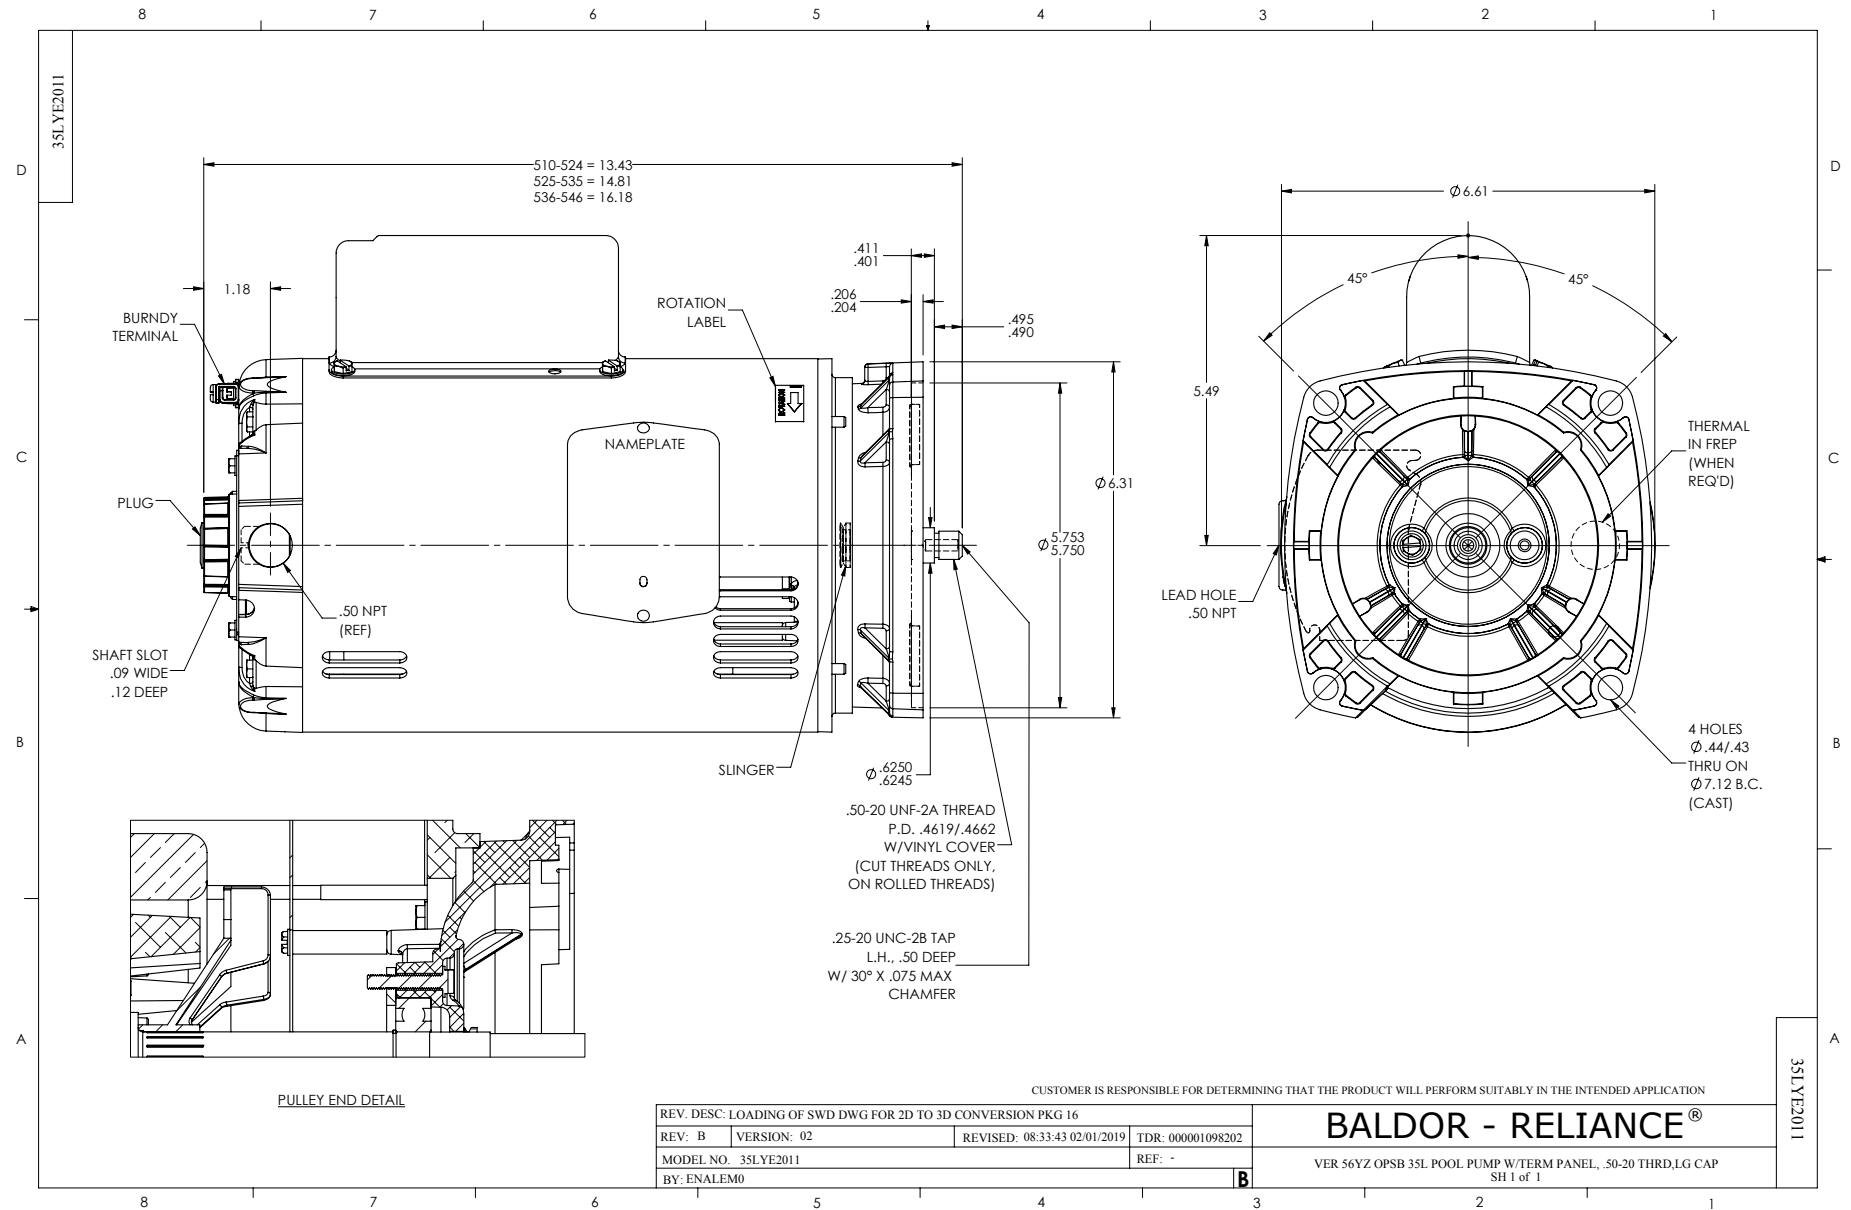

CD0203

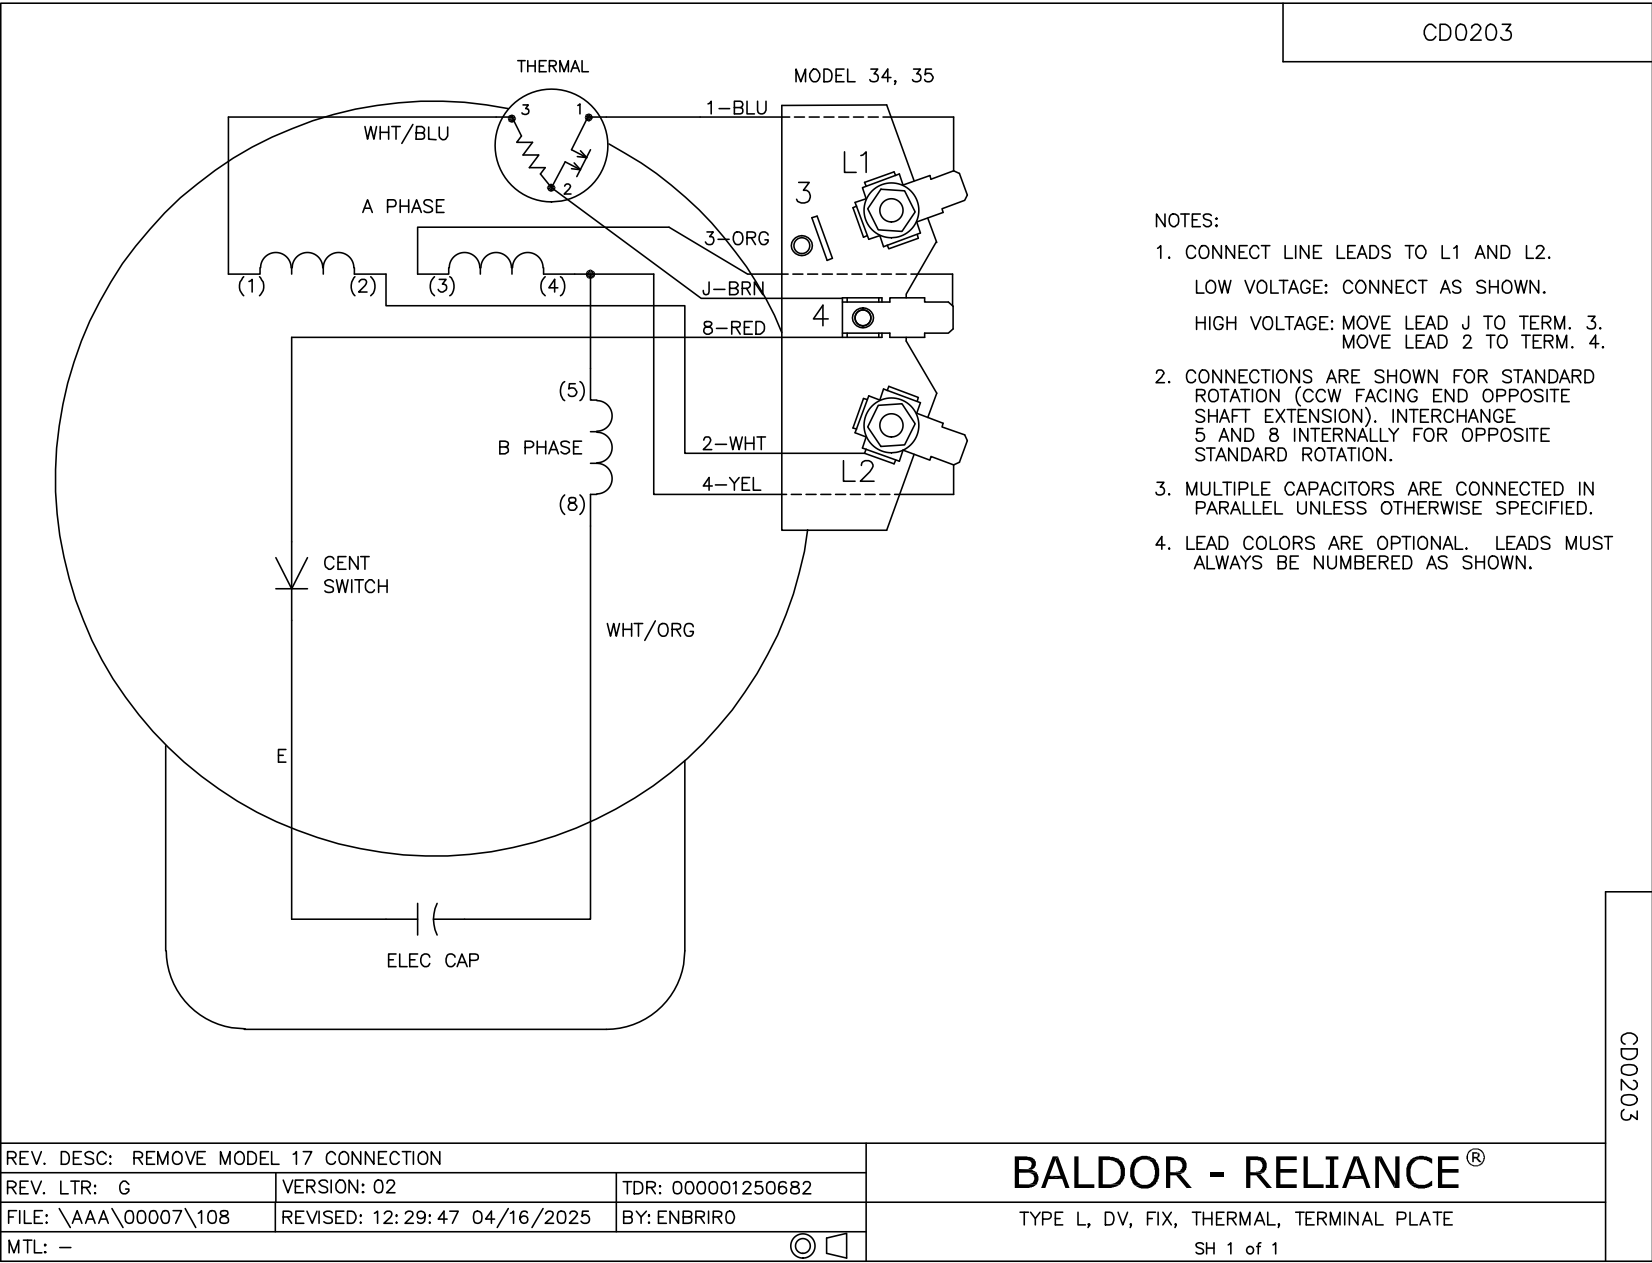

- NOTES:
1. CONNECT LINE LEADS TO L1 AND L2.
LOW VOLTAGE: CONNECT AS SHOWN.
HIGH VOLTAGE: MOVE LEAD J TO TERM. 3.
MOVE LEAD 2 TO TERM. 4.
 2. CONNECTIONS ARE SHOWN FOR STANDARD
ROTATION (CCW FACING END OPPOSITE
SHAFT EXTENSION). INTERCHANGE
5 AND 8 INTERNALLY FOR OPPOSITE
STANDARD ROTATION.
 3. MULTIPLE CAPACITORS ARE CONNECTED IN
PARALLEL UNLESS OTHERWISE SPECIFIED.
 4. LEAD COLORS ARE OPTIONAL. LEADS MUST
ALWAYS BE NUMBERED AS SHOWN.

CD0203