



Customer information packet

KL3400

.17HP, 1725RPM, 1PH, 60HZ, 56C, 3408L, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	.170 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.900 A @ 230.0 V 2.300 A @ 208.0 V 3.800 A @ 115.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	49.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

Part detail

Revision	AD
Type	AC
Mech. spec.	34C063
Base	
Status	PRD/A
Elec. spec.	34WGW020
Layout	34LYC063
Eff. date	12-30-2024
CD Diagram	CD0001
Poles	04
Leads	6#18
Proprietary	False
Created date	01-01-0001

High Voltage Full Load Amps	1.9 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	M
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3408L
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.35 IN
Power Factor	57
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.35
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP1256L									
CAT.NO.	KL3400								
SPEC.	34C63W20								
HP	.17								
VOLTS	115/230								
AMP	3.8/1.9								
RPM	1725								
FRAME	56C		HZ	60			PH	1	
SER.F.	1.35	CODE	M	DES	N		CLASS	B	
NEMA-NOM-EFF	49	PF	57						
RATING	40C AMB-CONT								
CC									
DE	6203		ODE	6203					
ENCL	TEFC	SN							
	SFA 4.4/2.2								

AC Induction Motor Performance Data

Record # 6851

Typical performance - not guaranteed values

Winding: 34WGW020-R001			Type: 3408L		Enclosure: TEFC		
Nameplate Data			230 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		.17	Full Load Torque		0.5 LB-FT		
Volts		115/230	Start Configuration		direct on line		
Full Load Amps		3.8/1.9	Breakdown Torque		1.38 LB-FT		
R.P.M.		1725	Pull-up Torque		1.2 LB-FT		
Hz	60	Phase	1	Locked-rotor Torque		2.13 LB-FT	
NEMA Design Code		N	KVA Code	M	Starting Current		7.8 A
Service Factor (S.F.)		1.35		No-load Current		1.75 A	
NEMA Nom. Eff.		49	Power Factor	57	Line-line Res. @ 25°C		13.7 Ω A Ph 10.8 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		50°C	
S.F. Amps		4.4/2.2		Temp. Rise @ S.F. Load		61°C	

Load Characteristics 230 V, 60 Hz, 0.17 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	32	41	49	57	63	69	67
Efficiency	21	35	45	49	52	53	53
Speed	1775	1760	1730	1710	1685	1650	1665
Line amperes	1.75	1.8	1.9	2	2.1	2.4	2.2


ABB Motors and Mechanical Inc.

WINDING # 34WGW020

Typical performance - not guaranteed values.

0.17 HP 1 PH 60 HZ 1725 RPM 230 V 3408L

TORQUES (LB-FT): PO=1.38 PU=1.2 LR=2.13 LRA=7.8

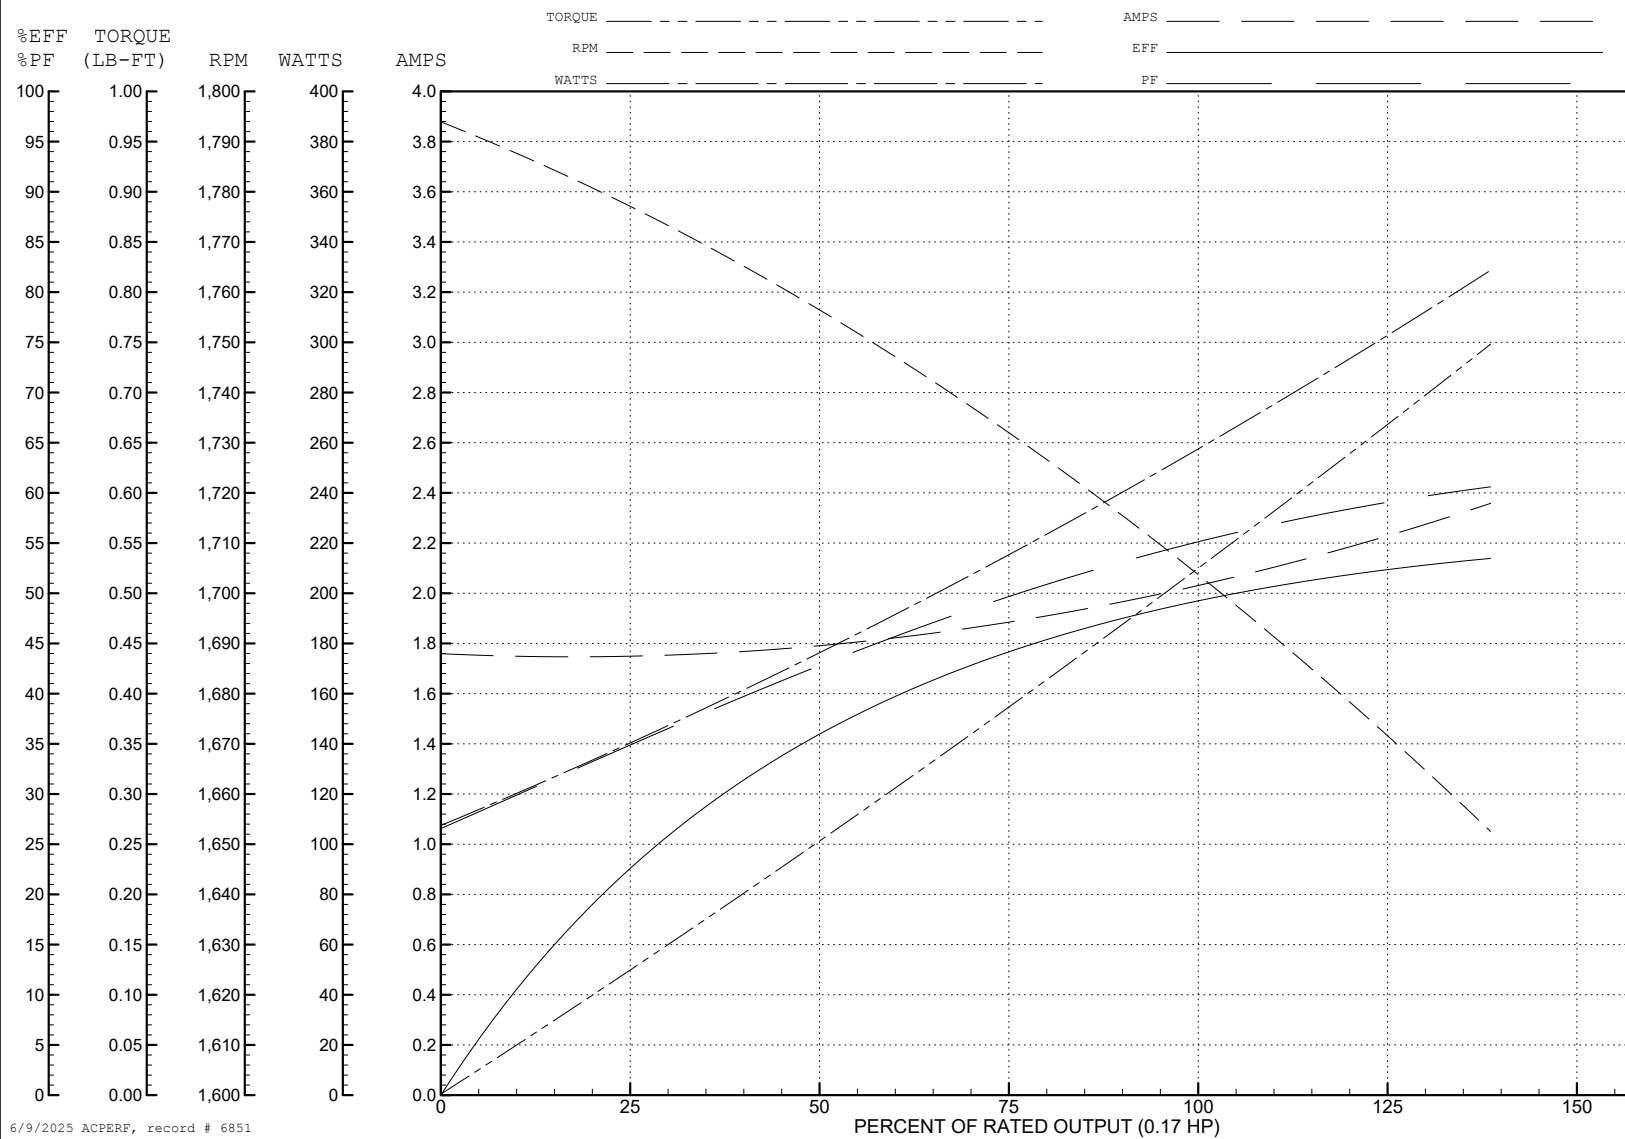

AC Induction Motor Performance Data

Record # 69691

Typical performance - not guaranteed values

Winding: 34WGW020-R001			Type: 348L		Enclosure: TEFC		
Nameplate Data			115 V, 60 Hz: Low Voltage Connection				
Rated Output (HP)		.17	Full Load Torque		0.5 LB-FT		
Volts		115/230	Start Configuration		direct on line		
Full Load Amps		3.8/1.9	Breakdown Torque		1.38 LB-FT		
R.P.M.		1725	Pull-up Torque		1.2 LB-FT		
Hz	60	Phase	1	Locked-rotor Torque		2.35 LB-FT	
NEMA Design Code		N	KVA Code	M	Starting Current		16.2 A
Service Factor (S.F.)		1.35		No-load Current		3.5 A	
NEMA Nom. Eff.		49	Power Factor	57	Line-line Res. @ 25°C		3.23 Ω A Ph 10.5 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		50°C	
S.F. Amps		4.4/2.2		Temp. Rise @ S.F. Load		58°C	
				Locked-rotor Power Factor		95	
				Rotor inertia		0.019 LB-FT2	

Load Characteristics 115 V, 60 Hz, 0.17 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	37	43	47	54	60	60	60
Efficiency	21	34.9	44.9	49	51.9	52.9	52.3
Speed	1775	1760	1730	1710	1685	1650	1671
Line amperes	3.5	3.6	3.8	4	4.2	4.8	4.44


ABB Motors and Mechanical Inc.


WINDING # 34WG020

Typical performance - not guaranteed values.


0.17 HP 1 PH 60 HZ 1725 RPM 115 V 348L

TORQUES (LB-FT): PO=1.38 PU=1.2 LR=2.35 LRA=16.2

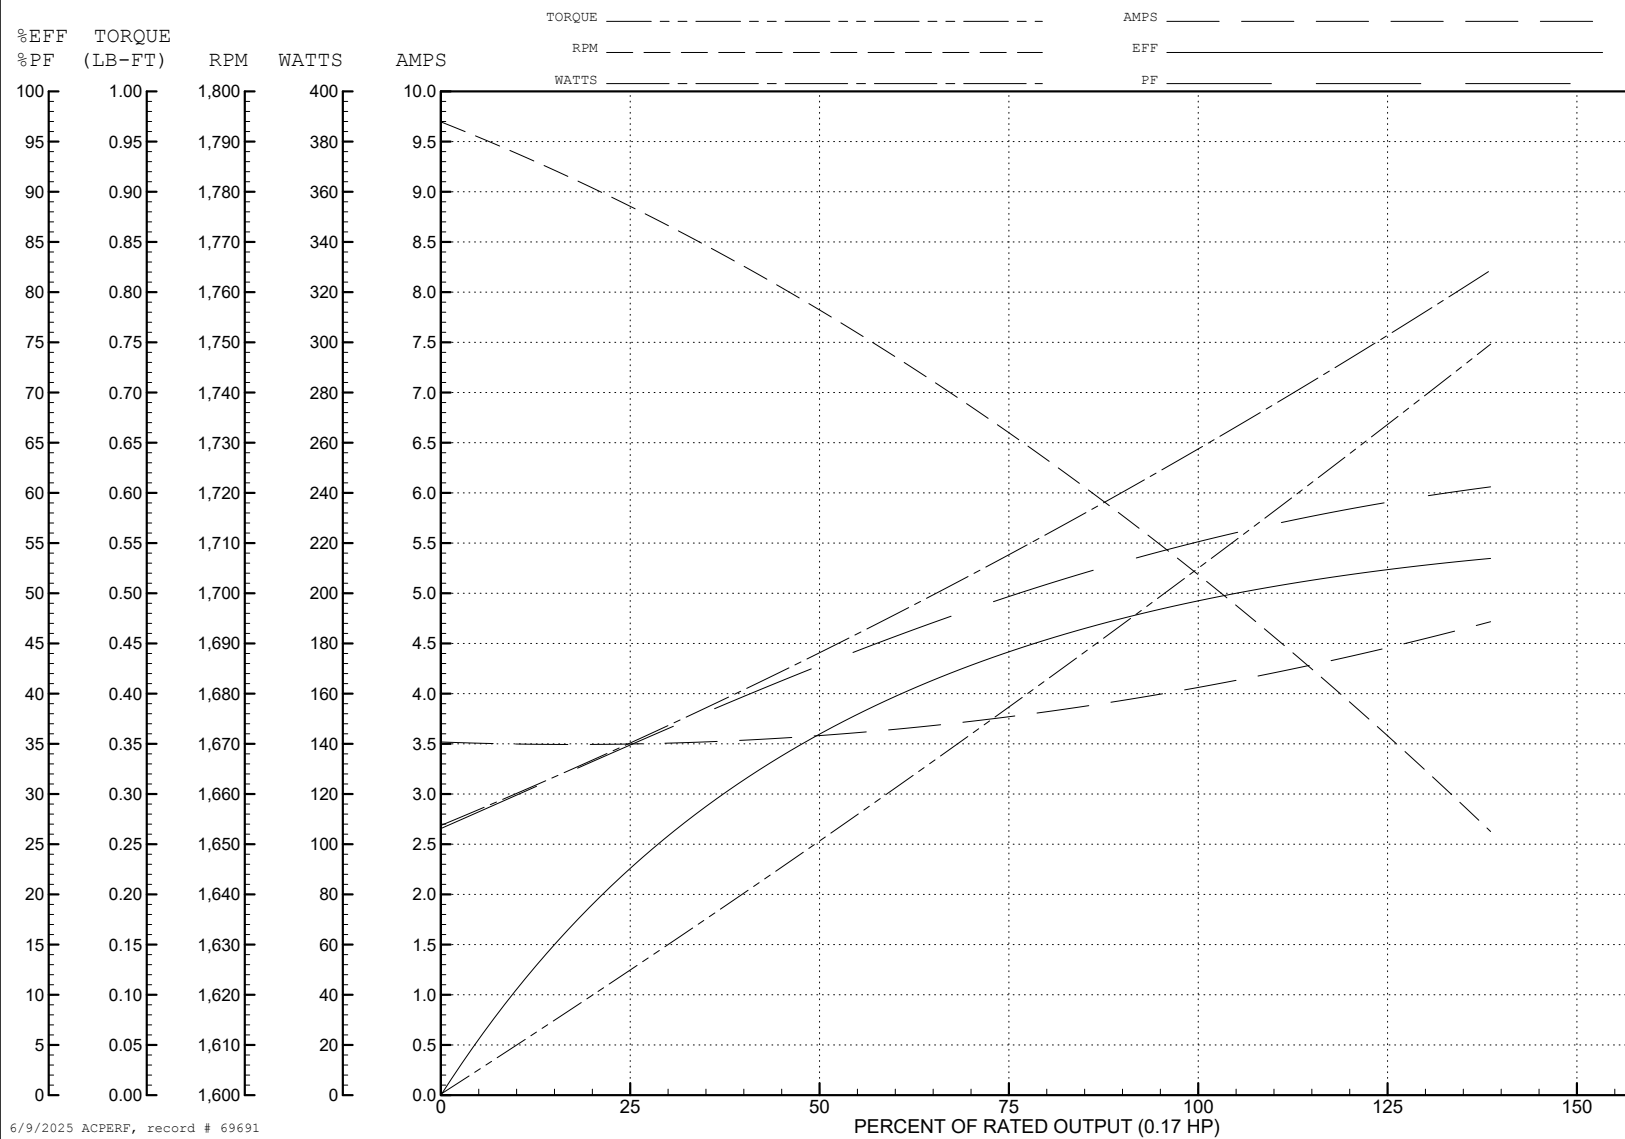

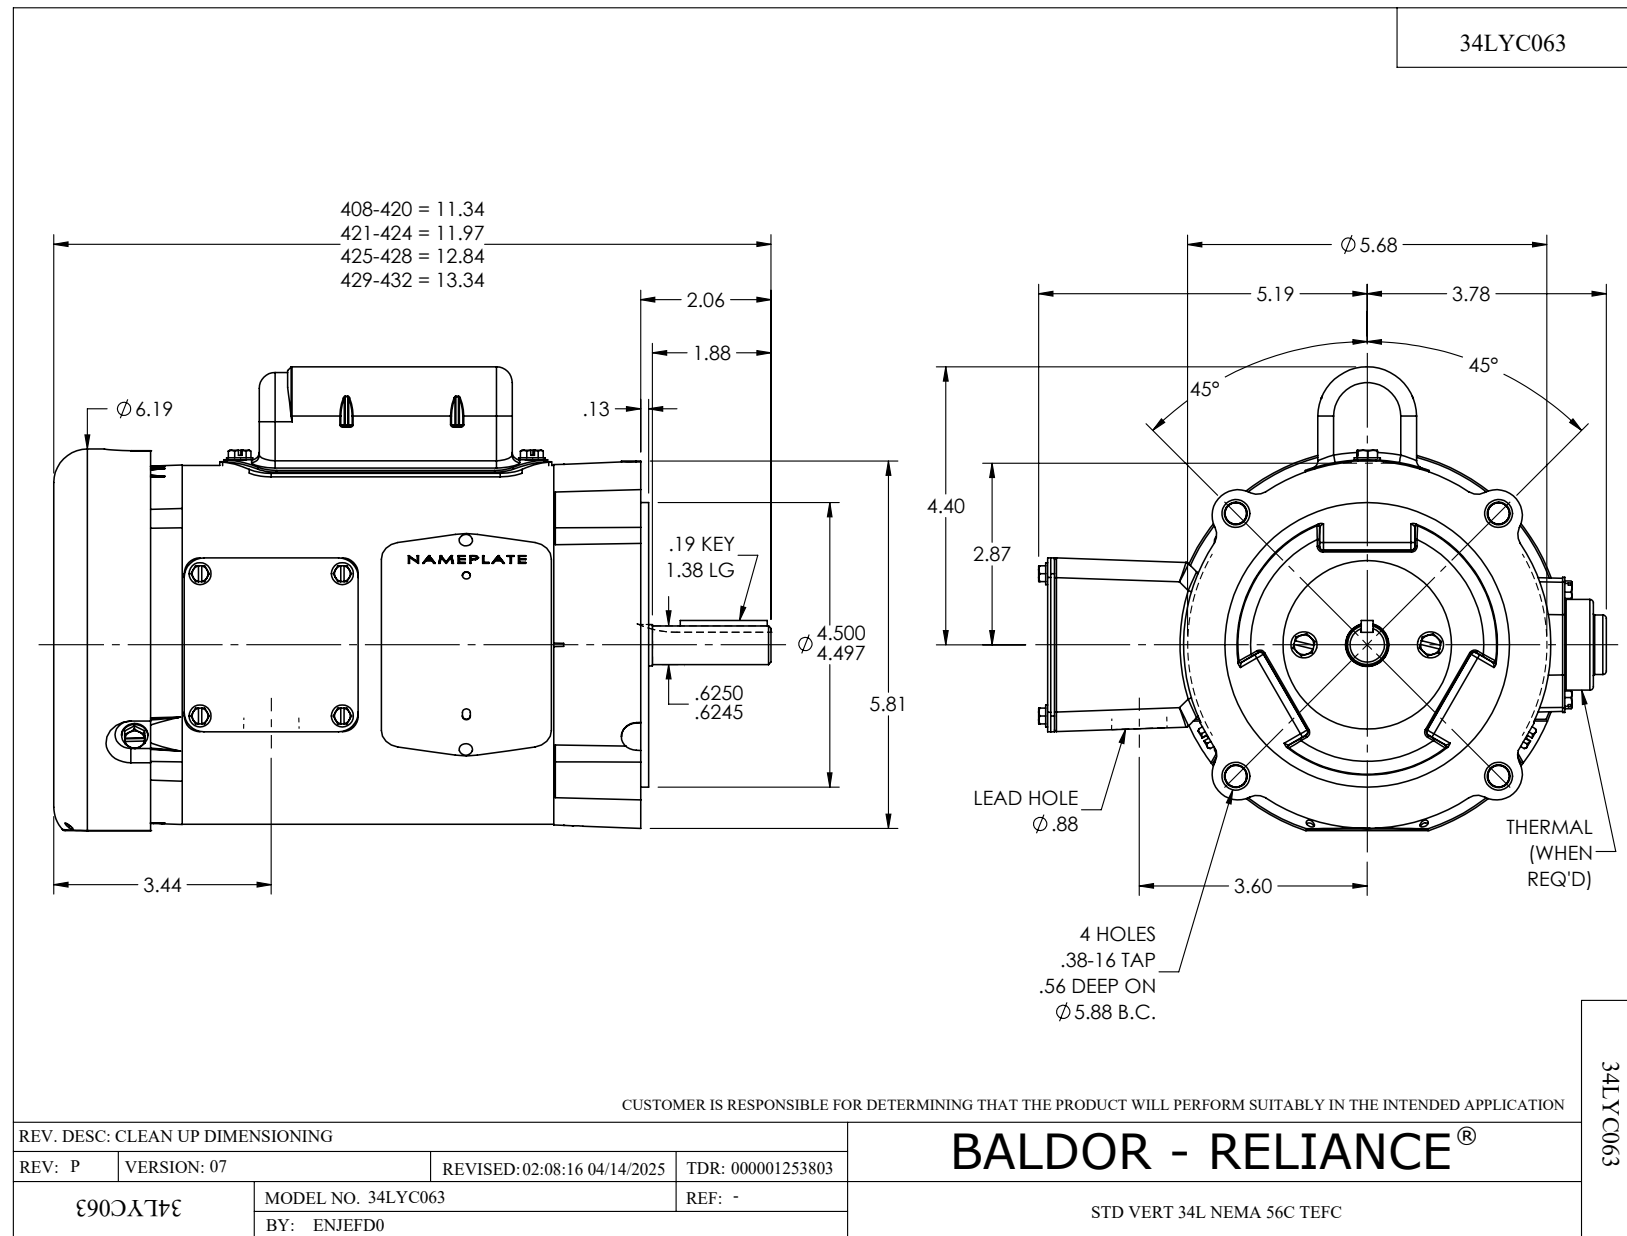

CD0001

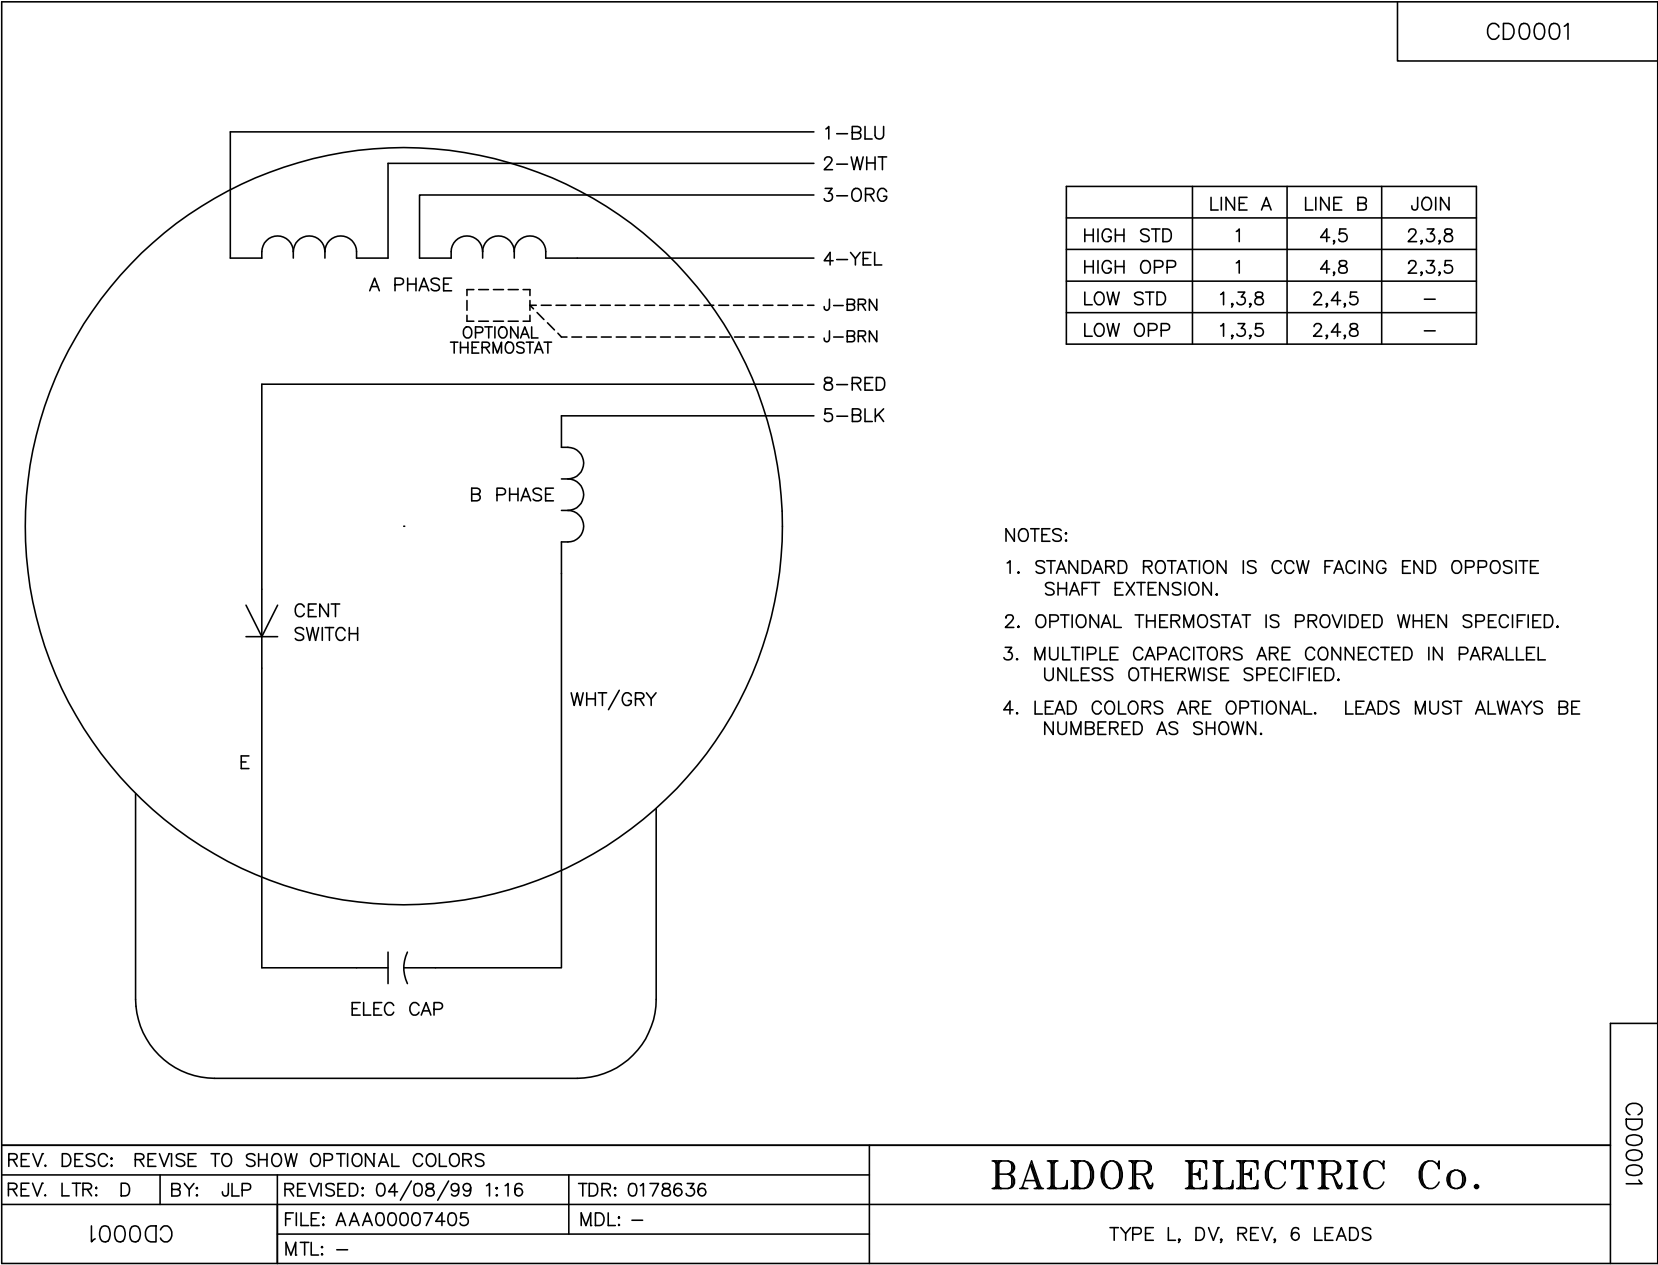

	LINE A	LINE B	JOIN
HIGH STD	1	4,5	2,3,8
HIGH OPP	1	4,8	2,3,5
LOW STD	1,3,8	2,4,5	—
LOW OPP	1,3,5	2,4,8	—

- NOTES:
- 1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
 - 2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
 - 3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0001

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:16	TDR: 0178636
100000		FILE: AAA00007405	MDL: —
		MTL: —	

BALDOR ELECTRIC Co.

TYPE L, DV, REV, 6 LEADS