



Customer information packet

L3500

.25HP, 1150RPM, 1PH, 60HZ, 56, 3526L, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	.250 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.400 A @ 230.0 V 6.800 A @ 115.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	55.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	3.4 a
Insulation Class	F
Inverter Code	Not Inverter

Part detail

Revision	B
Type	AC
Mech. spec.	35C011
Base	
Status	PRD/A
Elec. spec.	35WGG379
Layout	35LYC011
Eff. date	01-27-2025
CD Diagram	CD0001
Poles	06
Leads	6#18
Proprietary	False
Created date	09-26-2024

KVA Code	P
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3526L
Mounting Arrangement	F1
Number of Poles	6
Overall Length	13.23 IN
Power Factor	43
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.35
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1150 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	L3500								
SPEC.	35C011G379G2								
HP	.25								
VOLTS	115/230								
AMP	6.8/3.4								
RPM	1150								
FRAME	56		HZ	60		PH	1		
SER.F.	1.35	CODE	P	DES	N	CLASS	F		
NEMA-NOM-EFF	55	PF	43						
RATING	40C AMB-CONT								
CC									
DE	6205		ODE	6203					
ENCL	TEFC	SN							
	SFA 7.3/3.65								

Accessories

Part number	Description	Multiplier
35-8762	C FACE KIT	A8
35EP1506A01SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 107062

Preliminary Data Sheet

Winding: 35WGG379-R017		Type: 3526L	Enclosure: TEFC	
Nameplate Data		115 V, 60 Hz: Low Voltage Connection		
Rated Output (HP)	.25	Full Load Torque	1.12 LB-FT	
Volts	115/230	Start Configuration	direct on line	
Full Load Amps	6.8/3.4	Breakdown Torque	4.6 LB-FT	
R.P.M.	1150	Pull-up Torque	5.2 LB-FT	
Hz	60 Phase	1	Locked-rotor Torque	9.4 LB-FT
NEMA Design Code	N KVA Code	P	Starting Current	28.2 A
Service Factor (S.F.)		1.35	No-load Current	6.12 A
NEMA Nom. Eff.	55 Power Factor	43	Line-line Res. @ 25°C	1.65 Ω A Ph 1.71 Ω B Ph
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load	47°C
S.F. Amps		7.3/3.65	Temp. Rise @ S.F. Load	51°C
			Locked-rotor Power Factor	100
			Rotor inertia	0.188 lb-ft ²

Load Characteristics 115 V, 60 Hz, 0.25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	26	32	38	43	49	53	51
Efficiency	26	41.1	50.2	55.9	59.3	60.1	59.6
Speed	1192	1188	1183	1178	1172	1160	1167
Line amperes	6.04	6.22	6.48	6.78	7.09	7.64	7.31


ABB Motors and Mechanical Inc.

WINDING # 35WGG379


Typical performance - not guaranteed values.

0.25 HP 1 PH 60 HZ 1150 RPM 115 V 3526L

TORQUES (LB-FT) : PO=4.6 PU=5.2 LR=9.4 LRA=28.2

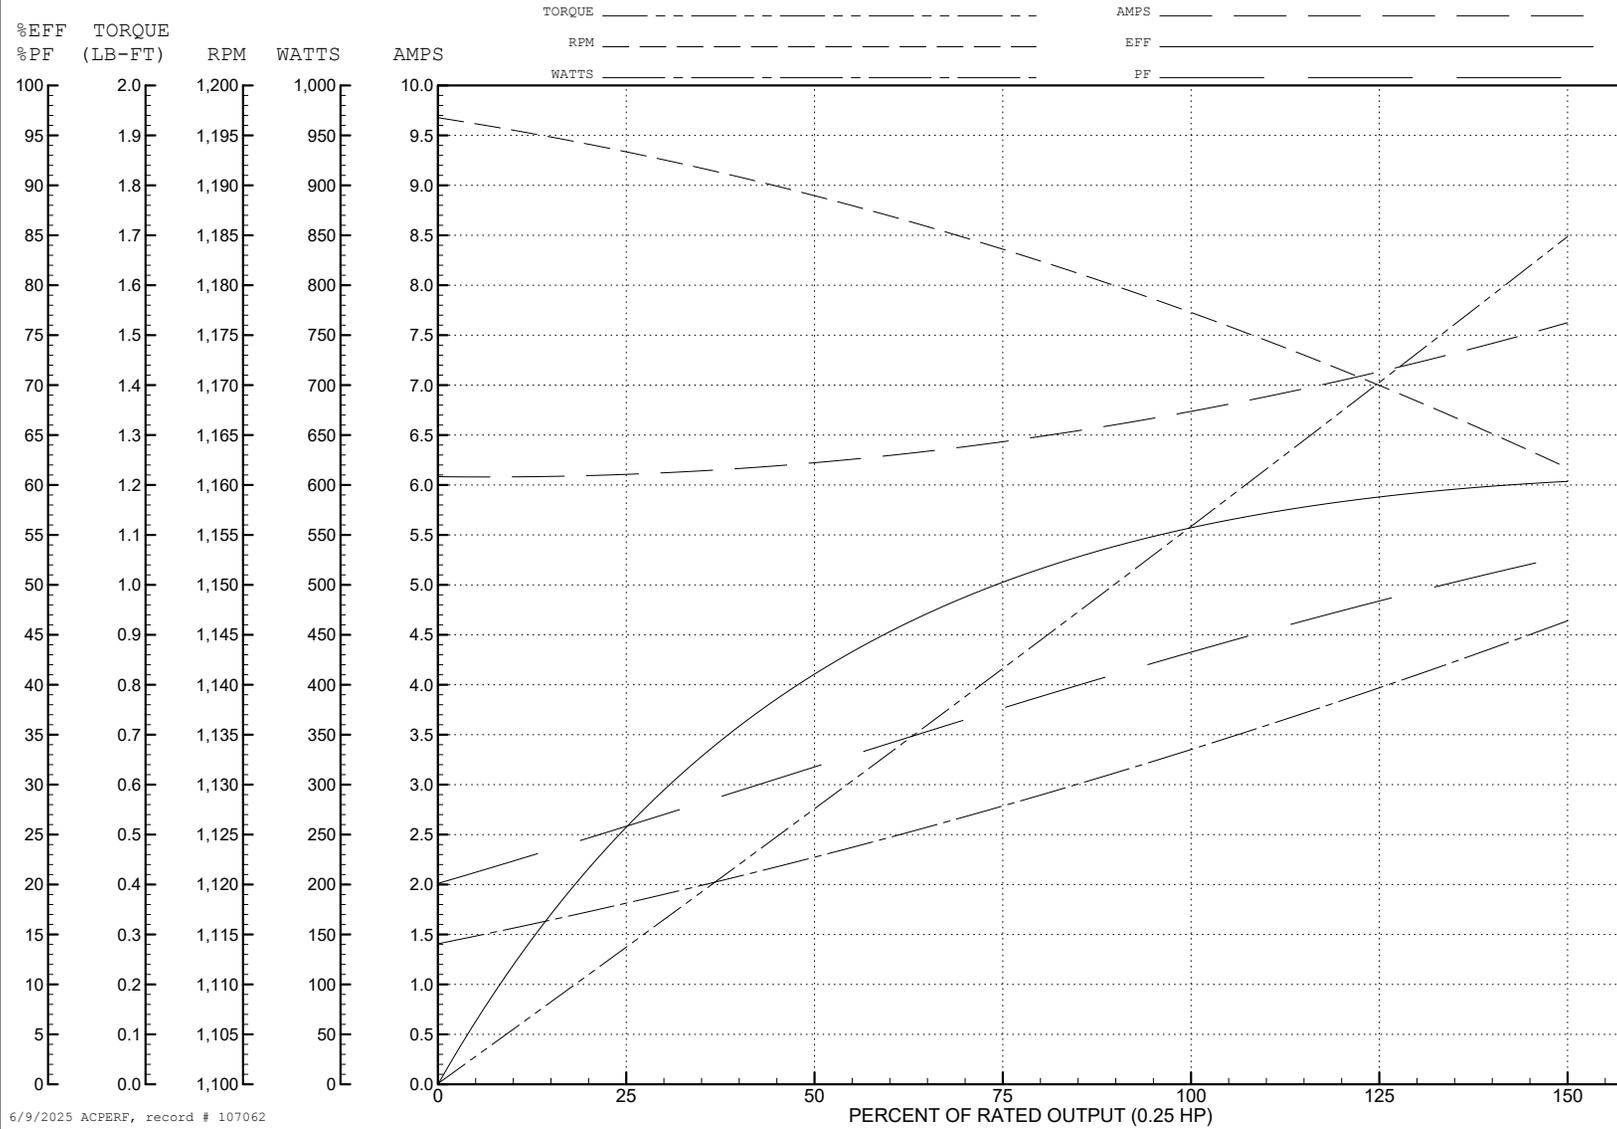

6/9/2025 ACPERF, record # 107062

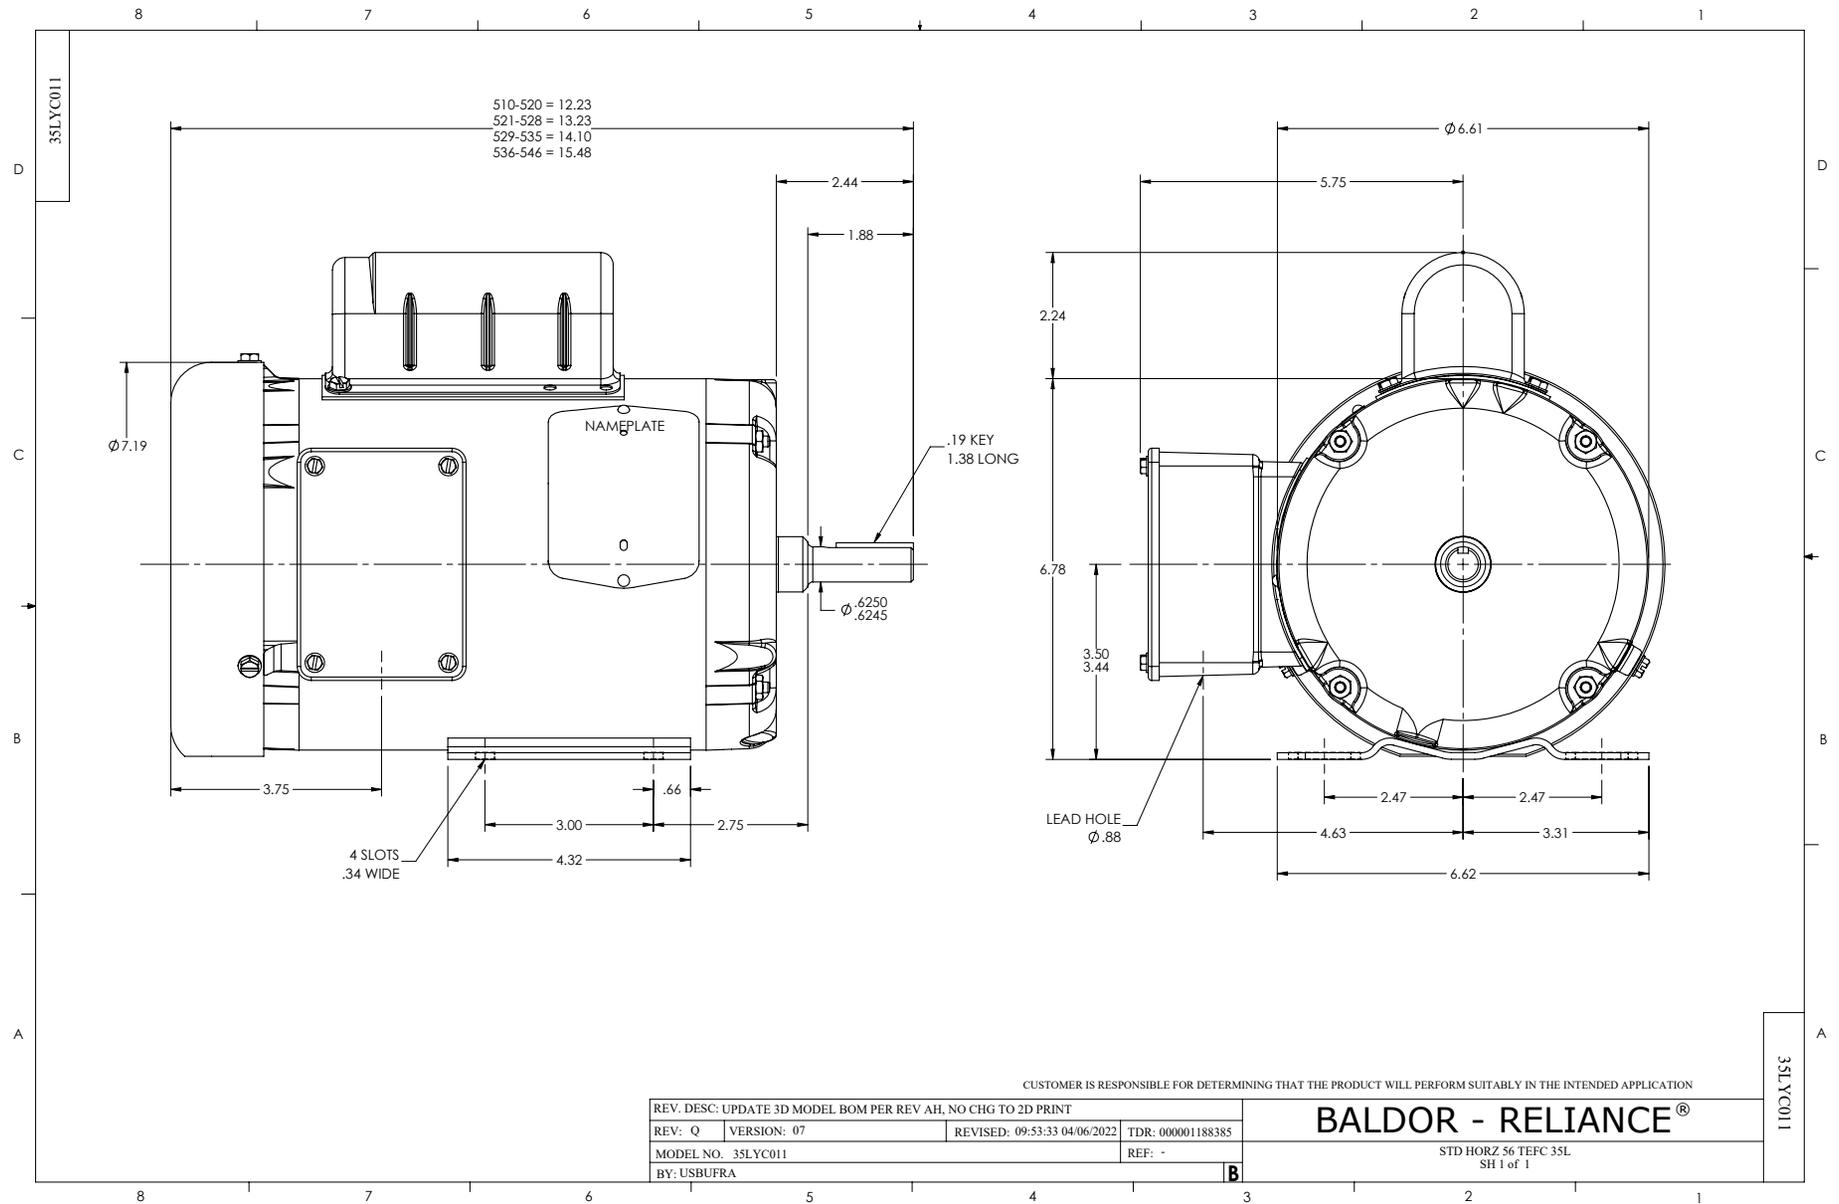

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION


REV. DESC: UPDATE 3D MODEL BOM PER REV AH, NO CHG TO 2D PRINT			
REV: Q	VERSION: 07	REVISED: 09:53:33 04/06/2022	TDR: 000001188385
MODEL NO. 35LYC011		REF: -	
BY: USBUFRA		B	

BALDOR - RELIANCE®

STD HORZ 56 TEFC 35L
SH 1 of 1

35LYC011

CD0001

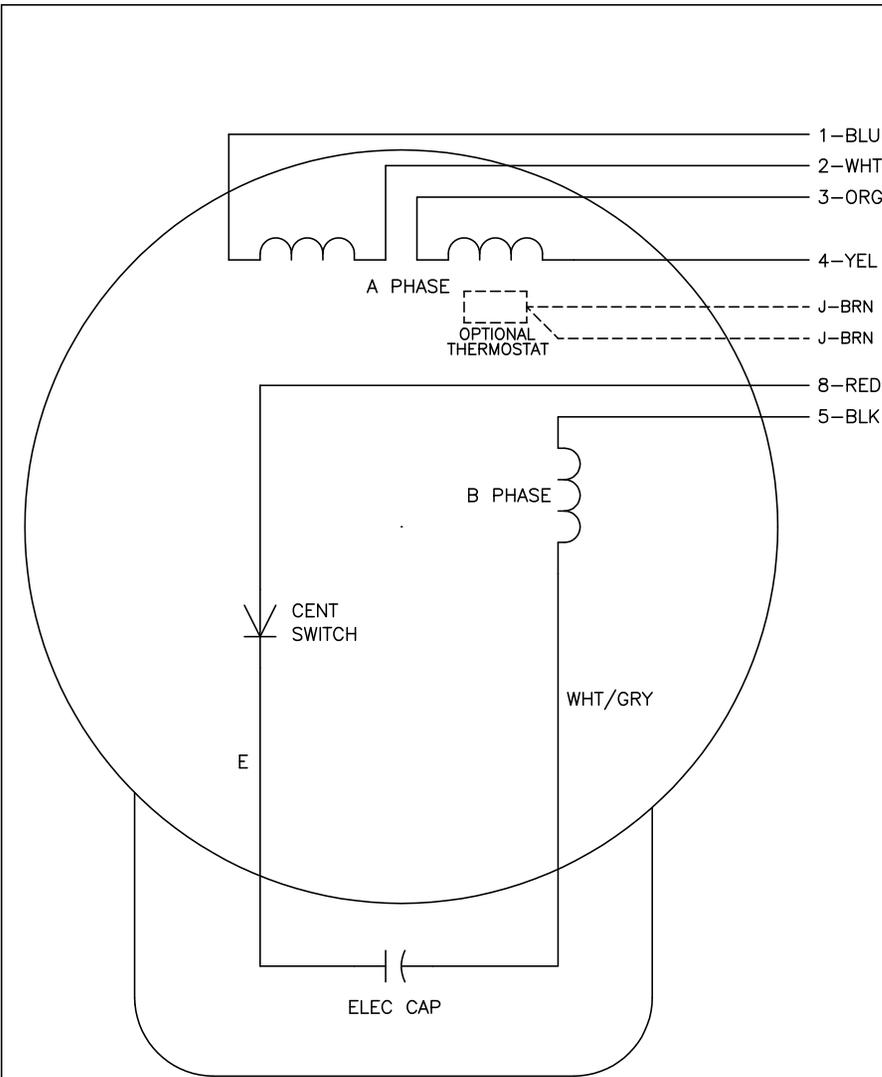

	LINE A	LINE B	JOIN
HIGH STD	1	4,5	2,3,8
HIGH OPP	1	4,8	2,3,5
LOW STD	1,3,8	2,4,5	-
LOW OPP	1,3,5	2,4,8	-

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:16	TDR: 0178636
100000		FILE: AAA00007405	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

TYPE L, DV, REV, 6 LEADS

CD0001