

BALDOR • RELIANCE

Customer information packet

L3711T

10HP, 3450RPM, 1PH, 60HZ, 215T, 3744LC, TEFC, F

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	215T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	10.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	40.000 A @ 230.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	82.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	40.0 a
Insulation Class	F
Inverter Code	Not Inverter

Part detail

Revision	L
Type	AC
Mech. spec.	37M230
Base	
Status	PRD/A
Elec. spec.	37WGW578
Layout	37LYM230
Eff. date	05-13-2024
CD Diagram	CD0086
Poles	02
Leads	2#10 A PH,2#14 B PH
Proprietary	False
Created date	02-09-2010

KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	2 @ 10 AWG, A PH
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3744LC
Mounting Arrangement	F1
Number of Poles	2
Overall Length	19.02 IN
Power Factor	98
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	L3711T								
SPEC.	37M230W578								
HP	10								
VOLTS	230								
AMP	40								
RPM	3450								
FRAME	215T		HZ	60		PH	1		
SER.F.	1.00	CODE	H	DES	L	CLASS	F		
NEMA-NOM-EFF	82	PF	98						
RATING	40C AMB-CONT								
CC									
DE	6307		ODE	6206					
ENCL	TEFC	SN							

Accessories

Part number	Description	Multiplier
37-3301	C FACE KIT	P1

AC Induction Motor Performance Data

Record # 11882

Typical performance - not guaranteed values

Winding: 37WGW578-R001		Type: 3744LC	Enclosure: TEFC	
Nameplate Data			230 V, 60 Hz: Single Voltage Motor	
Rated Output (HP)	10	Full Load Torque	15 LB-FT	
Volts	230	Start Configuration	direct on line	
Full Load Amps	40	Breakdown Torque	44 LB-FT	
R.P.M.	3450	Pull-up Torque	33 LB-FT	
Hz	60 Phase	1	Locked-rotor Torque	42 LB-FT
NEMA Design Code	L KVA Code	H	Starting Current	284 A
Service Factor (S.F.)		1	No-load Current	4.3 A
NEMA Nom. Eff.	82 Power Factor	98	Line-line Res. @ 25°C	0.174 Ω A Ph 0.681 Ω B Ph
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load	102°C

Load Characteristics 230 V, 60 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	99	99	99	99	98	97
Efficiency	66.6	78.9	82.9	83.9	83.4	81.8
Speed	3573	3551	3527	3500	3469	3431
Line amperes	12.2	20.6	29.5	39	49.4	61.1


ABB Motors and Mechanical Inc.

WINDING # 37WGW578


Typical performance - not guaranteed values.

10 HP 1 PH 60 HZ 3450 RPM 230 V 3744LC

TORQUES (LB-FT) : PO=44 PU=33 LR=42 LRA=284

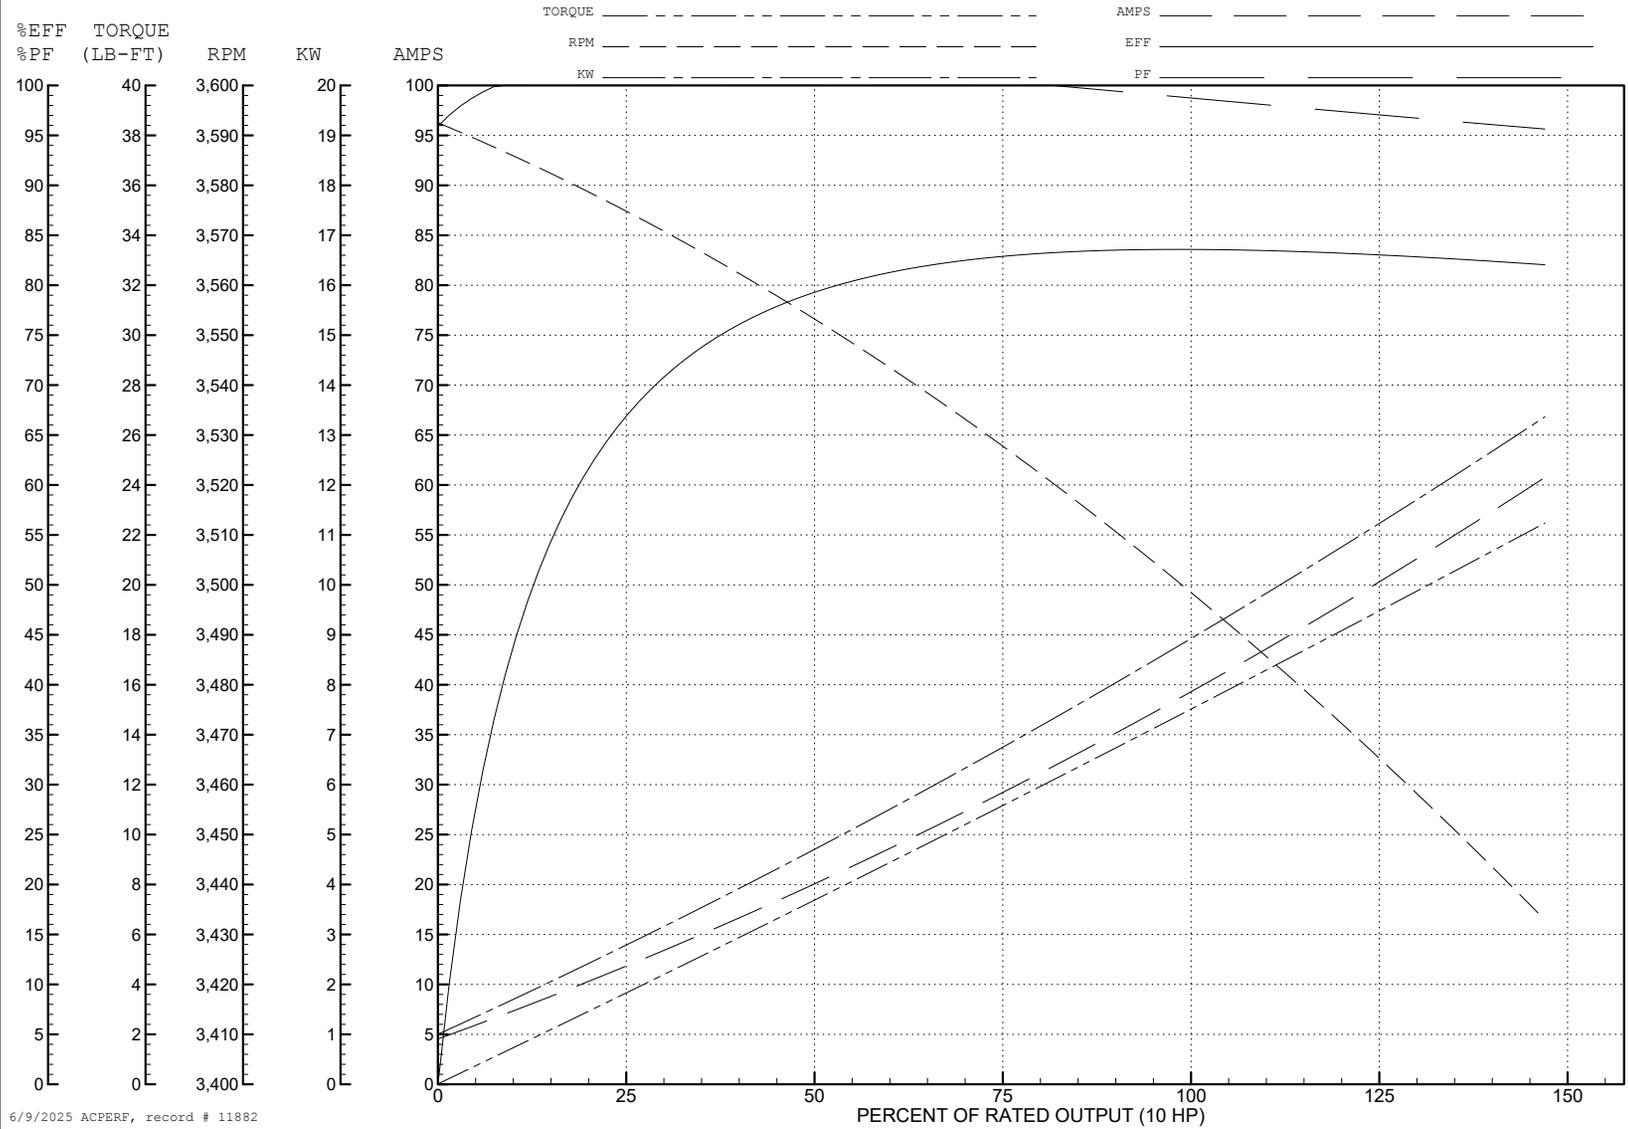

6/9/2025 ACPERF, record # 11882

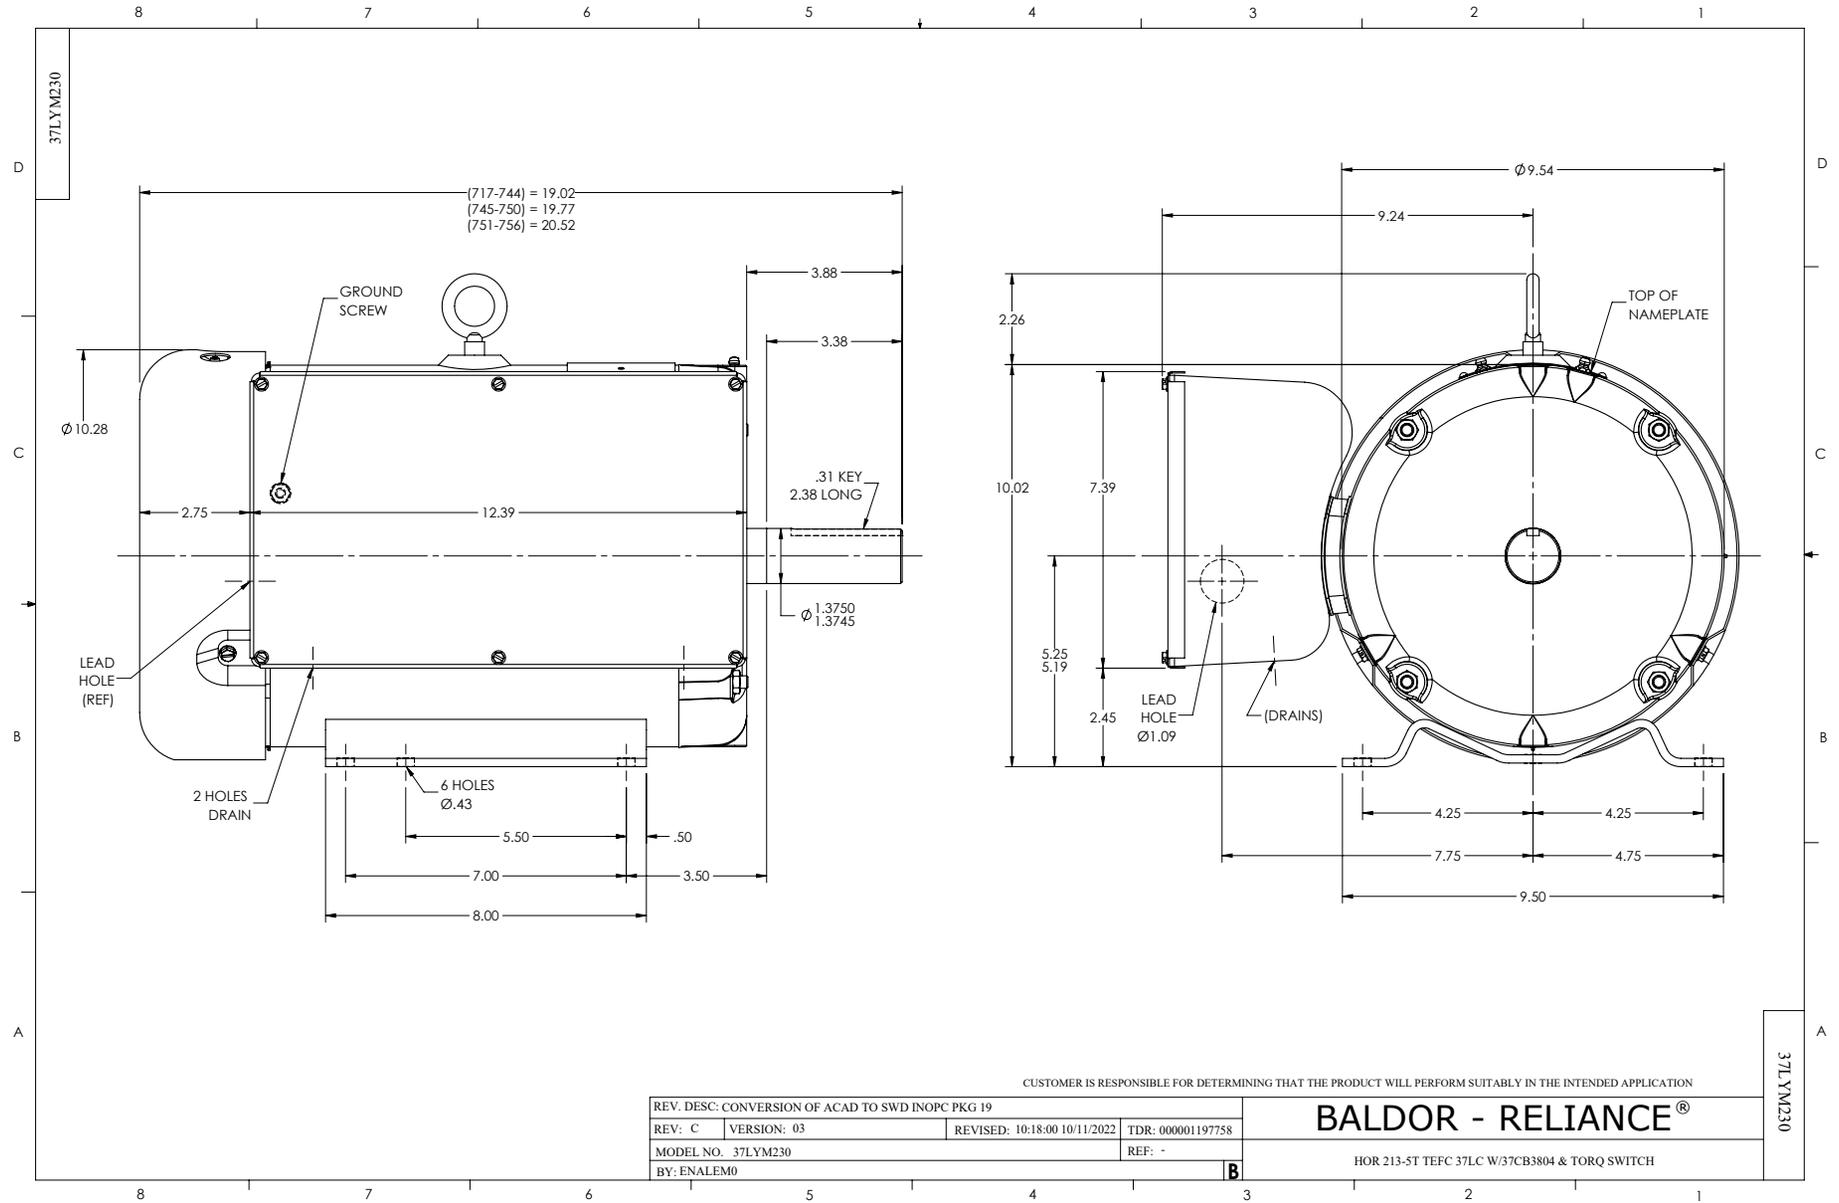


CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: CONVERSION OF ACAD TO SWD INOPC PKG 19			
REV: C	VERSION: 03	REVISED: 10/18/00 10/11/2022	TDR: 000001197758
MODEL NO. 37LYM230		REF: -	
BY: ENALEM0			

BALDOR - RELIANCE®

HOR 213-5T TEFC 37LC W/37CB3804 & TORQ SWITCH

CD0086

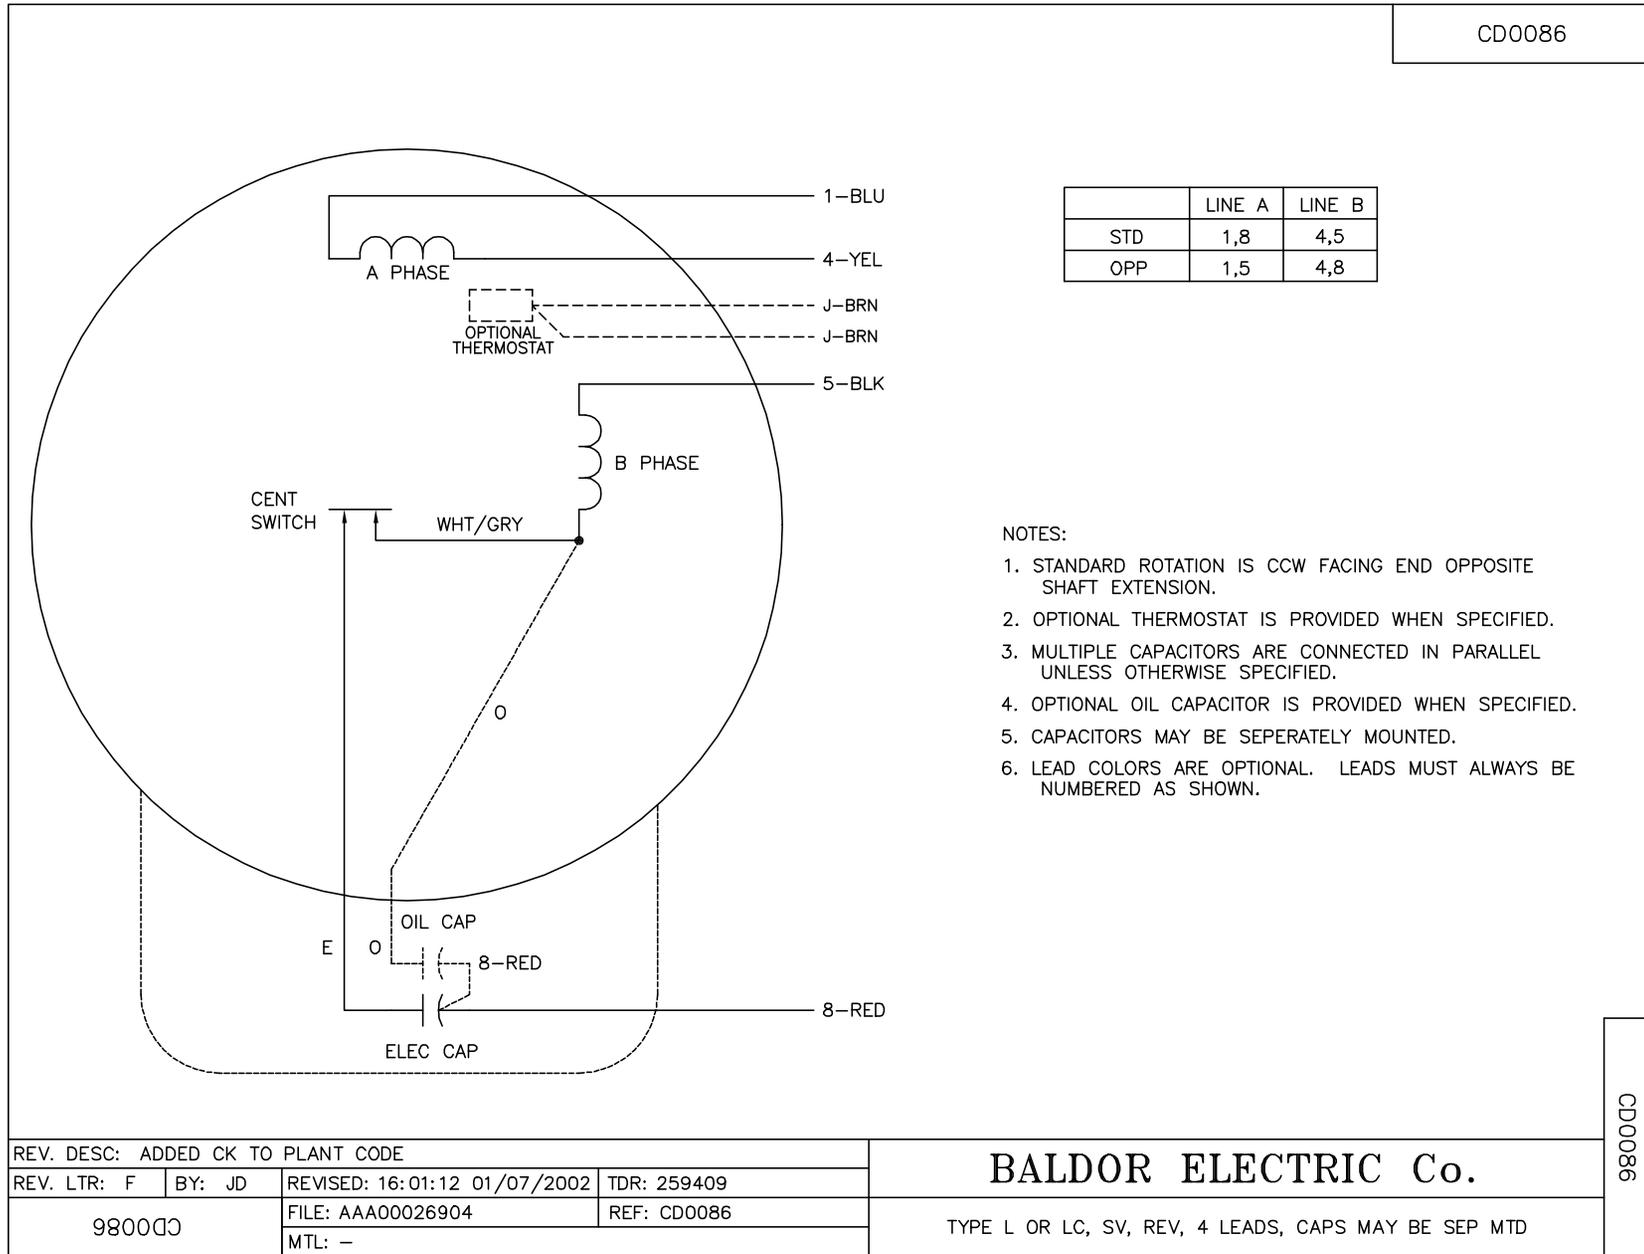

CD0086

BALDOR ELECTRIC Co.

TYPE L OR LC, SV, REV, 4 LEADS, CAPS MAY BE SEP MTD