

BALDOR • RELIANCE

Customer information packet

VEM2534T

30HP, 3530RPM, 3PH, 60HZ, 284TSC, 4040M, OPEN

Specifications

Enclosure	OPEN
Frame	284TSC
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	30.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	208.0 V @ 60 HZ 230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	70.000 A @ 230.0 V 76.000 A @ 208.0 V 35.000 A @ 460.0 V
Design Code	A
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Drip Cover Mounting
Front Shaft Indicator	None

Part detail

Revision	P
Type	AC
Mech. spec.	40E101
Base	
Status	PRD/A
Elec. spec.	40WGX193
Layout	40LYE101
Eff. date	12-26-2024
CD Diagram	CD0180
Poles	02
Leads	9#8
Proprietary	False
Created date	05-01-2015

Heater Indicator	No Heater
High Voltage Full Load Amps	35.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4040M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	25.09 IN
Power Factor	87
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3530 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP3554LUA										
CAT.NO.	VEM2534T			P/N				ENCL		OPEN
SPEC.	40E101X193G1	CC	010A	FRAME		284TSC	SER.NO.			
HP	30	CLASS		F	HZ	60				
RPM	3530	PH	3	DES		A				
VOLTS	208-230/460			CODE		H	ODE BRG	6309	DE BRG	6312
AMPS	76-70/35									
RATING	40C AMB-CONT			NEMA-NOM-EFF			91.7	GREASE	POLYREX EM	
PF	87	SER.F.	1.15	CT30-60(2:1) VT3-60(20:1)						
USABLE AT	50HZ 30HP 190/380V 84/42A			SF 1.0						
HTR-VOLTS	HTR-AMPS	MAX. SPACE HEATER TEMP.								

AC Induction Motor Performance Data

Record # 33084

Typical performance - not guaranteed values

Winding: 40WGX193-R001		Type: 4040M		Enclosure: OPSB	
Nameplate Data			460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)	30	Full Load Torque	44.7 LB-FT		
Volts	208-230/460	Start Configuration	direct on line		
Full Load Amps	76-70/35	Breakdown Torque	175 LB-FT		
R.P.M.	3530	Pull-up Torque	59.3 LB-FT		
Hz	60 Phase	3	Locked-rotor Torque	78.3 LB-FT	
NEMA Design Code	A KVA Code	H	Starting Current	240 A	
Service Factor (S.F.)	1.15		No-load Current	11.2 A	
NEMA Nom. Eff.	91.7 Power Factor	0	Line-line Res. @ 25°C	0.21802 Ω	
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	23°C	
S.F. Amps			Temp. Rise @ S.F. Load	28°C	
			Locked-rotor Power Factor	24	
			Rotor inertia	1.72 LB-FT ²	

Load Characteristics 460 V, 60 Hz, 30 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	58	77	84	87	88	89	88
Efficiency	89.3	92.8	93.4	93.2	92.6	91.8	92.8
Speed	3582.7	3568.7	3554.6	3538.7	3522.3	3504.1	3529
Line amperes	14.4	20.3	27.2	35.1	43.4	52.1	40.1


ABB Motors and Mechanical Inc.

WINDING # 40WGX193


Typical performance - not guaranteed values.

30 HP 3 PH 60 HZ 3530 RPM 460 V 4040M


TORQUES (LB-FT): PO=175 PU=59.3 LR=78.3 LRA=240

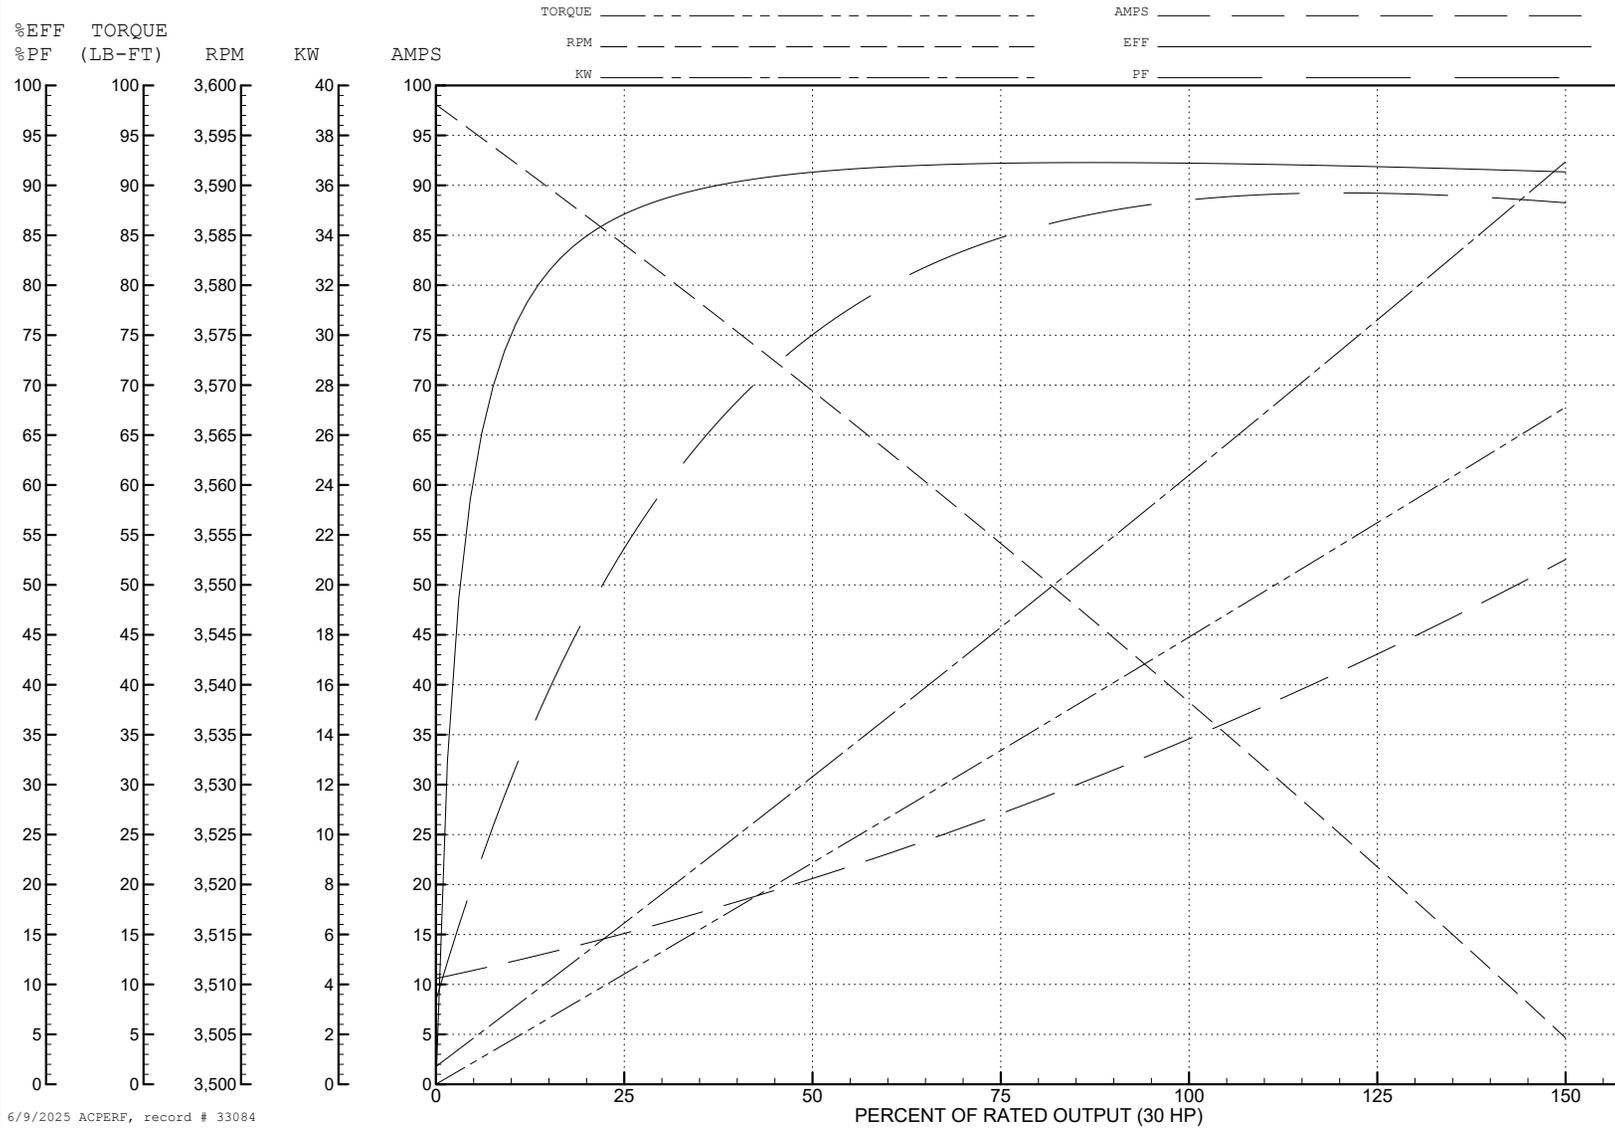


6/9/2025 ACPERF, record # 33084

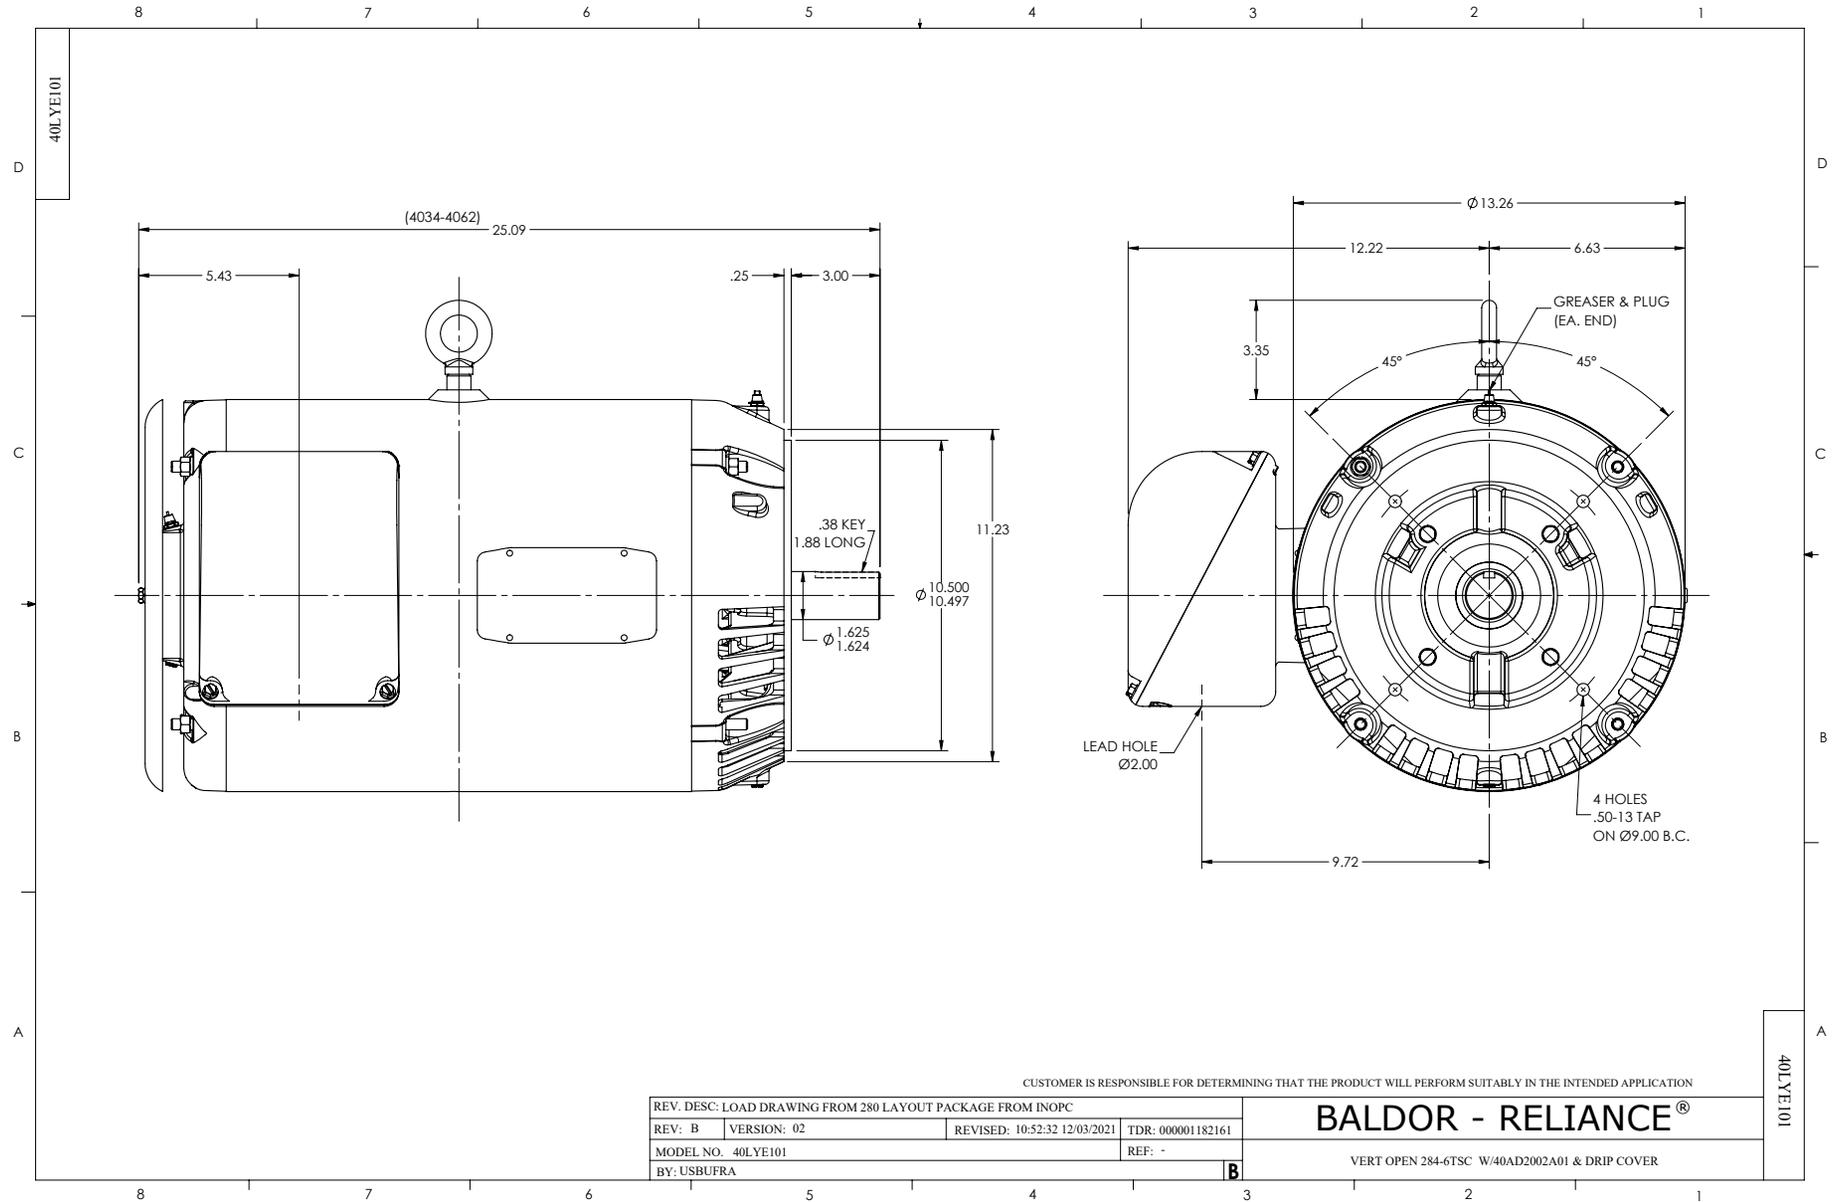


CD0180

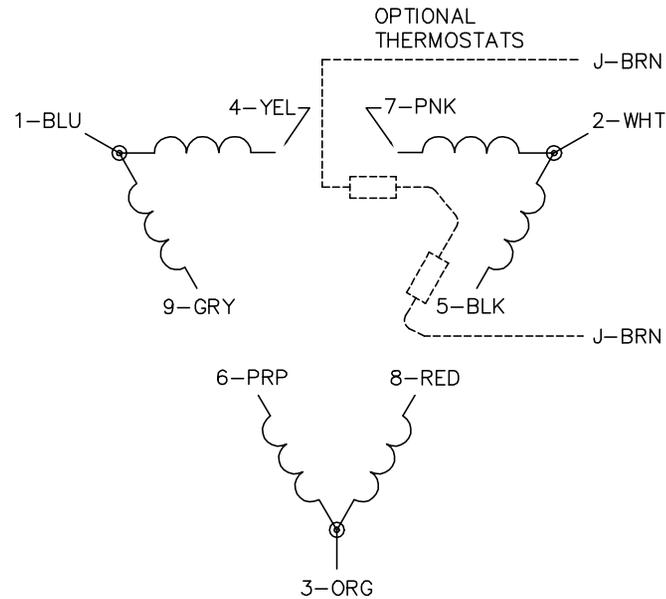

LOW VOLTAGE
(2D)

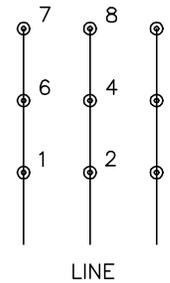

HIGH VOLTAGE
(1D)

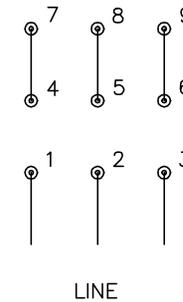

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: D	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\148	REVISED: 10: 25: 29 02/19/2019	BY: ENBRIRO
MTL: -	© □	

BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1