



Customer information packet

VEM3561

3HP, 1760RPM, 3PH, 60HZ, 56C, 3632M, TEFC, F1, N

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV CURUSEEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	8.400 A @ 230.0 V 9.000 A @ 208.0 V 4.200 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

Part detail

Revision	M
Type	AC
Mech. spec.	36J035
Base	
Status	PRD/A
Elec. spec.	36WGS266
Layout	36LYJ035
Eff. date	05-19-2025
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	04-30-2015

Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	4.2 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3632M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	15.62 IN
Power Factor	75
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441LUA

CAT.NO.	VEM3561										
SPEC	36J035S266G3										
HP	3										
VOLTS	230/460										
AMPS	8.4/4.2										
RPM	1760										
FRAME	56C		HZ	60		PH	3				
SF	1.15		CODE	K	DES	B	CLASS	F			
NEMA NOM. EFF	89.5		PF	75							
RATING	40C AMB-CONT										
CC	010A										
ENCL	TEFC	SER									
DE	6206		ODE	6205							
VPWM INVERTER READY	SFA 9.1/4.5										
CT6-60H(10:1)VT3-60H(20:1											
	50Hz 3HP 190/380V 9.6/4.8A										
	SF1.0										

AC Induction Motor Performance Data

Record # 53364

Typical performance - not guaranteed values

Winding: 36WGS266-R006			Type: 3632M		Enclosure: TEFC		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		3	Full Load Torque		8.8 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		8.4/4.2	Breakdown Torque		37.6 LB-FT		
R.P.M.		1760	Pull-up Torque		15.2 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		21.7 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		32.7 A
Service Factor (S.F.)		1.15	No-load Current		2.3 A		
NEMA Nom. Eff.		89.5	Power Factor	75	Line-line Res. @ 25°C		3.81 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		44°C
S.F. Amps					Temp. Rise @ S.F. Load		52°C
					Locked-rotor Power Factor		42.2
					Rotor inertia		0.298 LB-FT2

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	35	55	68	75	80	82	77
Efficiency	81.1	87.8	89.6	89.8	89.7	88.2	89.2
Speed	1791	1783	1773	1764	1753	1741	1754
Line amperes	2.47	2.85	3.43	4.09	4.89	5.78	4.63


ABB Motors and Mechanical Inc.

WINDING # 36WGS266

Typical performance - not guaranteed values.

3 HP 3 PH 60 HZ 1760 RPM 460 V 3632M

TORQUES (LB-FT): PO=37.6 PU=15.2 LR=21.7 LRA=32.7

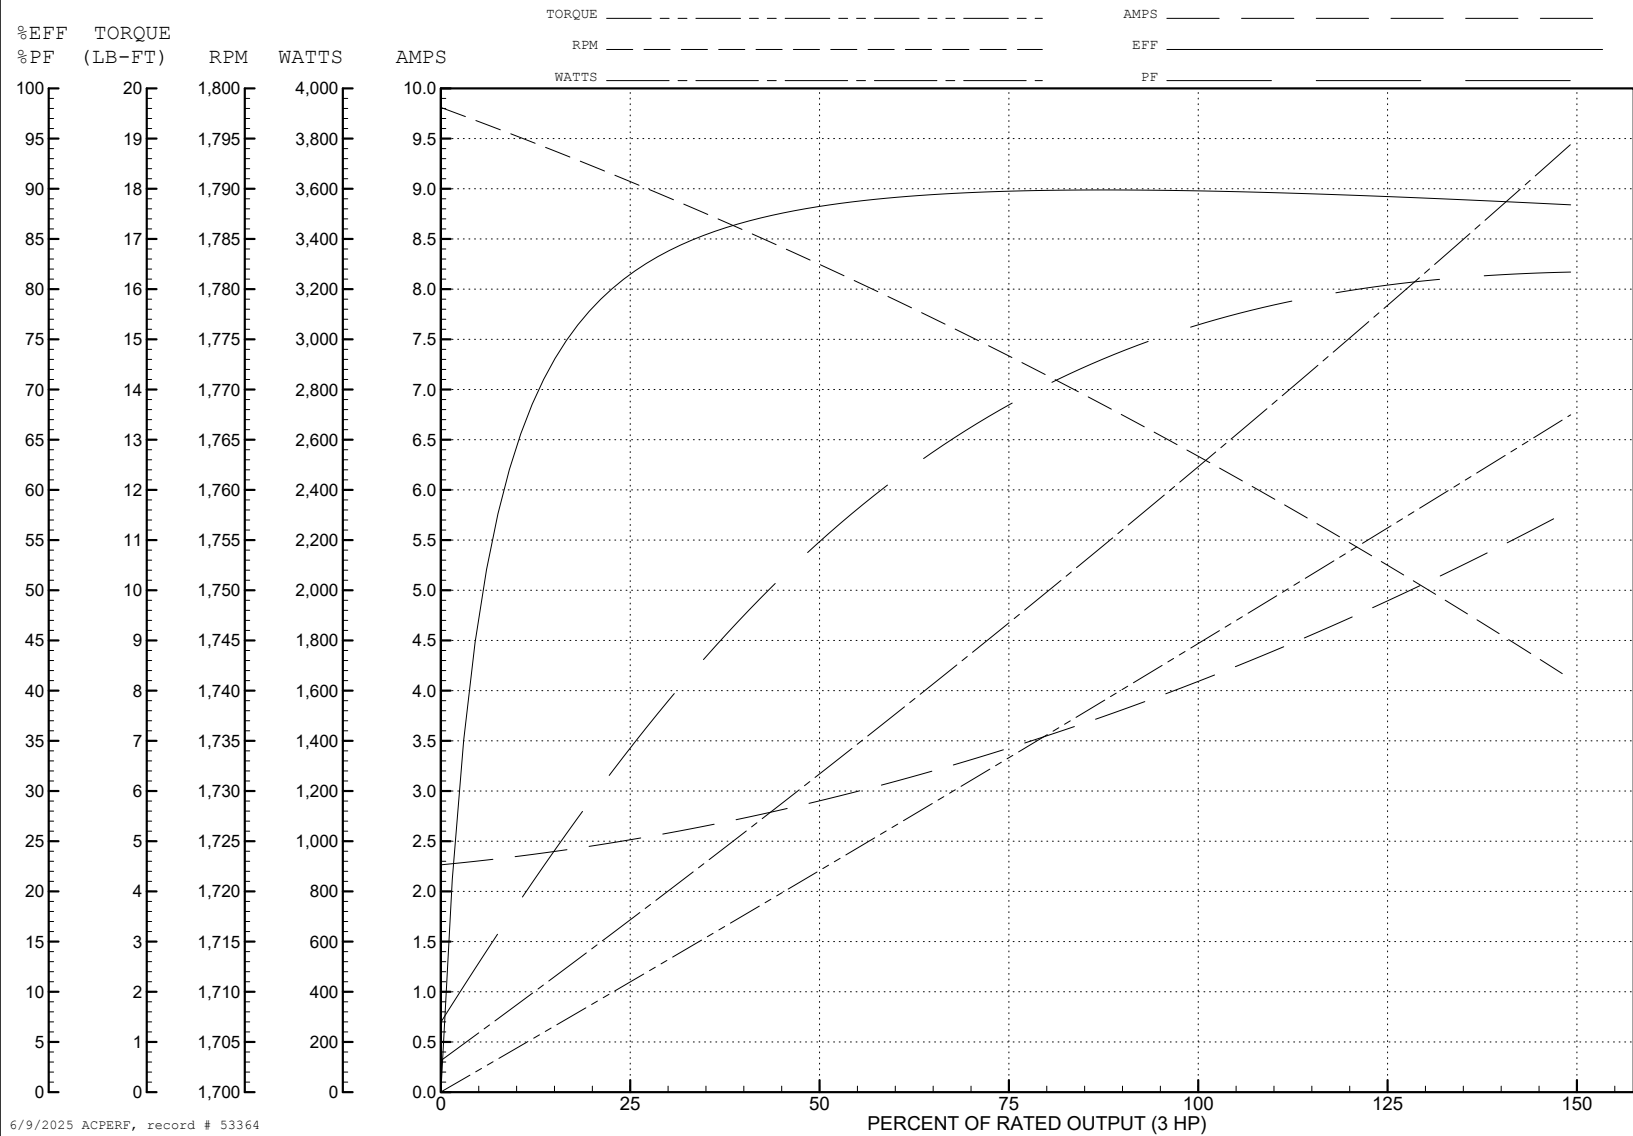

AC Induction Motor Performance Data

Record # 57957

Typical performance - not guaranteed values

Winding: 36WGS266-R006			Type: 3632M		Enclosure: TEFC		
Nameplate Data			230 V, 60 Hz: Low Voltage Connection				
Rated Output (HP)		3	Full Load Torque		8.8 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		8.4/4.2	Breakdown Torque		37.6 LB-FT		
R.P.M.		1760	Pull-up Torque		15.2 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		21.7 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		65.4 A
Service Factor (S.F.)		1.15		No-load Current		4.6 A	
NEMA Nom. Eff.		89.5	Power Factor	75	Line-line Res. @ 25°C		0.953 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		44°C	
S.F. Amps				Temp. Rise @ S.F. Load		52°C	
				Locked-rotor Power Factor		42.2	
				Rotor inertia		0.298 LB-FT2	

Load Characteristics 230 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	35	55	68	75	80	82	78
Efficiency	81.1	87.8	89.6	89.8	89.7	88.2	89.7
Speed	1791	1783	1773	1764	1753	1741	1757
Line amperes	4.94	5.7	6.86	8.18	9.78	11.6	9.14

ABB Motors and Mechanical Inc.

WINDING # 36WGS266

Typical performance - not guaranteed values.

3 HP 3 PH 60 HZ 1760 RPM 230 V 3632M

TORQUES (LB-FT): PO=37.6 PU=15.2 LR=21.7 LRA=65.4

