




FD68C8W, Substation - Copper Stud Connector

By Burndy

Catalog # [FD68C8W](#)

Copper Stud Connectors

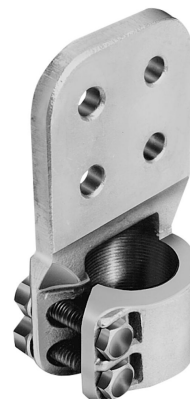

Features

- High copper alloy stud connector allows bolting cable and tubing terminals to equipment studs
- Hex head captured bolts provide one-wrench installation
- One pad contact surface is on centerline of stud, pad is finished on both sides, all pads are 4-hole NEMA drilling

Application

Substation

Specifications

Certification - ETL	No
Certification - UL Recognized	No
Standards - RoHS Compliance	EX
Status	
Certification - cULus	No
UL Listed	No
Certification - CSA Approved	No

Conductor

Conductor - Connection Combination	Stud to Pad
------------------------------------	-------------

Configuration

Physical Attribute - Pad Orientation	In-line
Physical Attribute - Pad Configuration	3x3 - 4 holes
Physical Attribute - Number of Holes	4
Connector Type	Stud Connector

Dimensions

Dimension - Pin Diameter inch	2.000 in
Dimension - Pin Diameter fraction	2

Dimension - Pad Width inch	3.00 in
Package Height	0.000 in
Dimension - Height mm	0 mm
Dimension - Bolt Size fraction	1/2
Package Weight	0.000 lb.
Package Length	0.000 in
Dimension - F Width Center to Center inch	1.75 in
Package Width	0.000 in
Dimension - L Length Overall mm	161 mm
Dimension - B Length inch	2.18 in
Dimension - D inch	3.00 in
Dimension - N inch	0.62 in
Dimension - Thread Size	1/2-12
Dimension - Threads per inch	12
Dimension - Length Overall inch	6.35 in

General

Plated	Y
Material - Hardware	DURIUM™ Silicon Bronze
UPC	781810106563
Type	Studs
Material	Copper Alloy
Plating Type	Tin - Hot Dipped
UPC 12 Digit	781810106563
UPC 14 Digit GTIN	00781810106563

Logistics

Minimum Pack Quantity	1
Pallet Quantity	1
Carton Quantity	1

Product Assets

[Catalog \[English\]](#)