



Precision Servo Gearboxes

SureGear® Servo Gearbox Selection													
SureServoMotor (SV and SV2)	Gear Ratio	SureGear Gearbox	Frame Size (mm)	Motor Nominal Output Torque		Combo Nominal Output Torque		Nominal Output Speed (rpm)	Max Output Speed (rpm)	Available Load Inertia @ 5:1 Mismatch *			
				N-m	lb-in	N-m	lb-in			kg-cm2	lb-in-s2		
SV2L-201(x)	5:1	PGD047-05A1	47	0.32	2.83	1.52	13.44	600	1200.00	6.76	0.006		
		PGA050-05A1	50							6.94	0.006		
		PGA070-05A1	70							5.91	0.005		
		PGB070-05A1	70							1.59**	0.001**		
	10:1	PGD047-10A1	47			3.04	26.89			300	600.00	28.15	0.025
		PGA050-10A1	50									28.35	0.025
		PGA070-10A1	70									25.75	0.023
		PGB070-10A1	70									2.98	0.007**
	15:1	PGA050-15A1	50			4.32	38.21	200	400.00	62.66	0.055		
		PGA070-15A1	70							58.16	0.051		
		PGB070-15A1	70							4.22	0.048		
	25:1	PGD047-25A1	47			7.20	63.68	120	240.00	174.69	0.155		
		PGA050-25A1	50							174.69	0.155		
		PGA070-25A1	70							162.81	0.144		
		PGB070-25A1	70							7.04	0.134		
	50:1	PGD064-50A1	64			14.40	127.35	60	120.00	661.25	0.585		
SV2L-202(x)	5:1	PGD064-05A2	64	0.64	5.7	3.04	27.08	600	1200.00	28.75	0.025		
		PGA070-05A2	70							29.33	0.026		
		PGB070-05A2	70							2.98	0.022		
	10:1	PGD064-10A2	64			6.08	54.15			300	600.00	118.80	0.105
		PGA070-10A2	70									119.40	0.106
		PGB070-10A2	70									5.95	0.090
	15:1	PGA070-15A2	70			8.64	76.95	200	400.00	268.88	0.238		
		PGB070-15A2	70							264.83	0.234		
		PGB090-15A2	90							8.45	0.181		
	25:1	PGD064-25A2	64			14.40	128.25	120	240.00	747.50	0.662		
		PGA070-25A2	70							748.13	0.662		
		PGB070-25A2	70							14.08	0.652		
		PGB090-25A2	90							581.25	0.514		
		PGD090-25A2	90							14.40	0.620		
	50:1	PGD090-50A2	90			28.80	256.50	60	120.00	2875.00	2.544		
		PGD110-50A2	110							2125.00	1.881		
SV2L-204(x)	5:1	PGD064-05A2	64	1.27	11.2	6.03	53.20	600	1200.00	53.75	0.048		
		PGA070-05A2	70							54.33	0.048		
		PGB070-05A2	70							5.91	0.044		
	10:1	PGD064-10A2	64			12.07	106.40			300	600.00	218.80	0.194
		PGA070-10A2	70									219.40	0.194
		PGB070-10A2	70									11.81	0.179
	15:1	PGA070-15A2	70			17.15	151.20	200	400.00	493.88	0.437		
		PGB070-15A2	70							489.83	0.433		
		PGB090-15A2	90							16.76	0.380		
	25:1	PGD064-25A2	64			28.58	252.00	120	240.00	1372.50	1.215		
		PGA070-25A2	70							1373.13	1.215		
		PGB070-25A2	70							27.94	1.205		
		PGB090-25A2	90							1206.25	1.068		
		PGD090-25A2	90							28.58	1.173		
	50:1	PGD090-50A2	90			57.15	504.00	60	120.00	5375.00	4.757		
		PGD110-50A2	110							4625.00	4.093		

* Available load inertia is calculated based on servo motor inertia using the formula: Available Inertia = (5 x Motor Inertia – Gearbox Inertia) x (Gear Ratio)² A 5:1 inertia mismatch is a good target for design purposes. Systems with lower or higher mismatch may be possible, depending on operating conditions.

** This gearbox is NOT a suitable choice at a 5:1 mismatch. If inertia balancing is a selection criteria for your end use, please use a mismatch of 8:1 to 10:1.



Precision Servo Gearboxes

SureGear® Servo Gearbox Selection											
Sure Servo Motor	Gear Ratio	SureGear Gearbox	Frame Size (mm)	Motor Nominal Output Torque		Combo Nominal Output Torque		Nominal Output Speed (rpm)	Max Output Speed (rpm)	Available Load Inertia @ 5:1 Mismatch *	
				N-m	lb-in	N-m	lb-in			kg-cm2	lb-in-s2
SV2L-207(x)	5:1	PGA070-05A3	70	2.39	21.2	11.35	100.70	600	1200.00	186.83	0.165
		PGB090-05A3	90			11.11	98.58			143.75	0.127
		PGD090-05A3	90			11.35	100.70			174.25	0.154
	10:1	PGA090-10A3	90			22.71	201.40	300	600.00	726.00	0.643
		PGB090-10A3	90			22.23	197.16			586.00	0.519
		PGD090-10A3	90			22.71	201.40			722.00	0.639
	15:1	PGA090-15A3	90			32.27	286.20	200	400.00	1669.50	1.478
		PGB090-15A3	90			31.55	279.84			1622.25	1.436
		PGA090-25A3	90			53.78	477.00			4643.75	4.110
	25:1	PGB090-25A3	90			52.58	466.40	120	240.00	4518.75	3.999
		PGD110-25A3	110			53.78	477.00			4281.25	3.789
		PGD110-50A3	110			107.55	954.00			17875.00	15.819
SV2L-210(x)	5:1	PGA090-05A4	90	3.18	28.15	15.11	133.69	600	1000.00	321.25	0.284
		PGB090-05A4	90			14.79	130.88			286.25	0.253
		PGD090-05A4	90			15.11	133.69			319.25	0.283
	10:1	PGA090-10A4	90			30.21	267.38	300	500.00	1296.00	1.147
		PGB090-10A4	90			29.57	261.75			1156.00	1.023
		PGD090-10A4	90			30.21	267.38			1292.00	1.143
	15:1	PGA120-15A4	120			42.93	379.96	200	333.33	2884.50	2.553
		PGB120-15A4	120			41.98	371.52			2475.00	2.190
		PGD110-25A4	110			71.55	633.27			7843.75	6.942
	25:1	PGA120-25A4	120			69.96	619.20	120	200.00	8043.75	7.119
		PGB120-25A4	120			69.96	619.20			6918.75	6.123
		PGD110-50A4	110			143.10	1266.54			32125.00	28.431
SV2M-210(x)	5:1	PGA090-05A5	90	4.77	42.22	22.66	200.54	400.00	600.00	1041.25	0.922
		PGD090-05A5	90			22.18	196.31			1039.25	0.920
		PGB120-05A5	120			22.18	196.31			925.75	0.819
	10:1	PGA090-10A5	90			45.32	401.07	200.00	300.00	4176.00	3.696
		PGD110-10A5	110			44.36	392.63			4172.00	3.692
		PGB120-10A5	120			44.36	392.63			3759.00	3.327
	15:1	PGA120-15A5	120			64.40	569.94	133.33	200.00	9364.50	8.288
		PGB120-15A5	120			62.96	557.28			8955.00	7.925
		PGD110-25A5	110			107.33	949.91			25843.75	22.872
	25:1	PGA120-25A5	120			104.94	928.80	80.00	120.00	26043.75	23.049
		PGB120-25A5	120			104.94	928.80			24918.75	22.053
		PGD110-35A5	110			150.26	1329.87			50653.75	44.829

* Available load inertia is calculated based on servo motor inertia using the formula: Available Inertia = (5 x Motor Inertia – Gearbox Inertia) x (Gear Ratio)² A 5:1 inertia mismatch is a good target for design purposes. Systems with lower or higher mismatch may be possible, depending on operating conditions.



Precision Servo Gearboxes

SureGear® Servo Gearbox Selection													
Sure Servo Motor	Gear Ratio	SureGear Gearbox	Frame Size (mm)	Motor Nominal Output Torque		Combo Nominal Output Torque		Nominal Output Speed (rpm)	Max Output Speed (rpm)	Available Load Inertia @ 5:1 Mismatch *			
				N-m	lb-in	N-m	lb-in			kg-cm2	lb-in-s2		
SV2M-215(x)	5:1	PGA090-05A5	90	7.16	63.37	34.01	301.01	400.00	600.00	1390.00	1.230		
		PGD090-05A5	90							1388.00	1.228		
		PGB120-05A5	120							1274.50	1.128		
	10:1	PGA090-10A5	90			68.02	602.03	200.00	300.00	5571.00	4.930		
		PGD110-10A5	110							5567.00	4.927		
		PGB120-10A5	120							5154.00	4.561		
	15:1	PGA120-15A5	120			96.66	855.51	133.33	200.00	12503.25	11.065		
		PGB120-15A5	120							12093.75	10.703		
		PGD110-25A5	110							34562.50	30.588		
	25:1	PGA120-25A5	120			161.10	1425.86	80.00	120.00	34762.50	30.765		
		PGB120-25A5	120							33637.50	29.769		
		PGD110-35A5	110							225.54	1996.20	57.14	85.71
SV2M-220(x)	5:1	PGD110-05A6	110	9.55	84.52	45.36	401.49	400.00	600.00	4280.00	3.788		
		PGA120-05A6	120							4297.50	3.803		
		PGB120-05A6	120							4212.00	3.728		
		PGB155-05A6	155							3914.75	3.465		
	10:1	PGD110-10A6	110			90.73	802.98	200.00	300.00	17240.00	15.257		
		PGA120-10A6	120							17255.00	15.271		
		PGB120-10A6	120							16904.00	14.960		
		PGB155-10A6	155							15884.00	14.057		
	15:1	PGA155-15A6	155			128.93	1141.08	133.33	200.00	38745.00	34.289		
		PGB155-15A6	155							126.06	1115.73	37597.50	33.274
	25:1	PGA155-25A6	155			214.88	1901.80	80.00	120.00	107750.00	95.359		
		PGB155-25A6	155							210.10	1859.54	104593.75	92.565
SV2M-230(x)	5:1	PGD110-05A6	110	17.55	155.33	83.36	737.80	340.00	600.00	6817.50	6.033		
		PGA120-05A6	120							6835.00	6.049		
		PGB120-05A6	120							6749.50	5.973		
		PGB155-05A6	155							6452.25	5.710		
	10:1	PGD110-10A6	110			166.73	1475.68	170.00	300.00	27390.00	24.240		
		PGA120-10A6	120							27405.00	24.253		
		PGB120-10A6	120							163.22	1444.62	27054.00	23.943
		PGB155-10A6	155							26034.00	23.040		
	15:1	PGA155-15A6	155			236.93	2097.01	113.33	200.00	61582.50	54.501		
		PGB155-15A6	155							231.66	2050.36	60435.00	53.485
	25:1	PGA155-25A6	155			394.88	3494.98	68.00	120.00	171187.50	151.501		
		PGB155-25A6	155							386.10	3417.27	168031.25	148.708

* Available load inertia is calculated based on servo motor inertia using the formula: Available Inertia = (5 x Motor Inertia – Gearbox Inertia) x (Gear Ratio)² A 5:1 inertia mismatch is a good target for design purposes. Systems with lower or higher mismatch may be possible, depending on operating conditions.



Precision Servo Gearboxes


Pricing & Specifications – Right-Angle Shaft PGB Series

SureGear® Precision Servo Gearboxes – Right-Angle Shaft PGB Series																				
Part Number	Price	Frame Size (mm)	Ratio	Reduction	Nominal Output Torque (N·m [lb-in])	Max. Acceleration Torque (N·m [lb-in])	Emergency Stop Torque (N·m [lb-in])	Backlash (arc-min)	Nominal Input Speed (rpm)	Max. Input Speed (rpm)	Allowable Radial Load (N [lb])	Allowable Thrust Load (N [lb])	Moment of Inertia (kg-cm ²)	Efficiency (%)	Max. Housing Temperature	Approx Weight (kg [lb])	Environmental Rating	Fits SureServo Servo Motor (SV & SV2)		
PGB070-05A1	\$788.00	70	5:1	double	22 [195]	40 [354]	80 [708]	6	3000	6000	510 [115]	390 [88]	0.250	90 °C [194 °F]	1.9 [4.2]	IP55	SV(2)L-201(B)			
PGB070-10A1	\$788.00		10:1	double	16 [142]	32 [283]	65 [575]				640 [144]	530 [119]	0.230							
PGB070-15A1	\$997.00		15:1	triple	16 [142]	32 [283]	65 [575]	740 [166]			630 [142]	0.073	88					1.7 [3.7]		
PGB070-25A1	\$997.00		25:1	triple	24 [212]	45 [398]	90 [797]	870 [196]			790 [178]	0.071								
PGB070-05A2	\$788.00		5:1	double	22 [195]	40 [354]	80 [708]	6			510 [115]	390 [88]	0.320					93	1.9 [4.2]	SV(2)L-202(B) SV(2)L-204(B)
PGB070-10A2	\$788.00		10:1	double	16 [142]	32 [283]	65 [575]				640 [144]	530 [119]	0.300							
PGB070-15A2	\$997.00		15:1	triple	16 [142]	32 [283]	65 [575]	9			740 [166]	630 [142]	0.118					88	1.7 [3.7]	SV(2)L-202(B)
PGB070-25A2	\$997.00		25:1	triple	24 [212]	45 [398]	90 [797]				870 [196]	790 [178]	0.115							
PGB090-15A2	\$1,217.00	90	15:1	triple	45 [398]	65 [575]	170 [1505]	9	1400 [314]	1900 [427]	0.410	88	4.3 [9.5]	SV(2)L-202(B) SV(2)L-204(B)						
PGB090-25A2	\$1,217.00		25:1	triple	65 [575]	110 [974]	220 [1947]		1600 [360]	2200 [495]	0.400									
PGB090-05A3	\$932.00		5:1	double	65 [575]	90 [797]	220 [1947]	6	960 [216]	1200 [270]	2.130	93	4.9 [10.8]	SV(2)L-207(B)						
PGB090-10A3	\$932.00		10:1	double	45 [398]	65 [575]	170 [1505]		1200 [270]	1600 [360]	2.020									
PGB090-15A3	\$1,217.00		15:1	triple	45 [398]	65 [575]	170 [1505]	9	1400 [314]	1900 [427]	0.600	88	4.3 [9.5]	SV(2)L-210(B)						
PGB090-25A3	\$1,217.00		25:1	triple	65 [575]	110 [974]	220 [1947]		1600 [360]	2200 [495]	0.590									
PGB090-05A4	\$932.00		5:1	double	65 [575]	90 [797]	220 [1947]	6	960 [216]	1200 [270]	4.260	93	4.9 [10.8]	SV(2)L-210(B)						
PGB090-10A4	\$932.00		10:1	double	45 [398]	65 [575]	170 [1505]		1200 [270]	1600 [360]	4.150									
PGB120-15A4	\$1,512.00	120	15:1	triple	110 [974]	200 [1770]	450 [3983]	9	2300 [517]	3000 [674]	4.700	88	10 [22]	SV(2)L-210(B)						
PGB120-25A4	\$1,512.00		25:1	triple	150 [1328]	300 [2655]	550 [4868]		2700 [607]	3700 [832]	4.640									
PGB120-05A5	\$1,217.00		5:1	double	120 [1062]	240 [2124]	500 [4425]	6	1600 [360]	1900 [427]	6.610	93	10.2 [22.5]	SV(2) M-210(B)						
PGB120-10A5	\$1,217.00		10:1	double	110 [974]	200 [1770]	450 [3983]		2000 [450]	2500 [562]	6.050									
PGB120-15A5	\$1,512.00		15:1	triple	110 [974]	200 [1770]	450 [3983]	9	2300 [517]	3000 [674]	4.700	88	10 [22]	SV(2)M-220(B) SV(2)M-230(B)						
PGB120-25A5	\$1,512.00		25:1	triple	150 [1328]	300 [2655]	550 [4868]		2700 [607]	3700 [832]	4.640									
PGB120-05A6	\$1,217.00		5:1	double	120 [1062]	240 [2124]	500 [4425]	6	1600 [360]	1900 [427]	13.690	93	10.2 [22.5]	SV(2)M-220(B) SV(2)M-230(B)						
PGB120-10A6	\$1,217.00		10:1	double	110 [974]	200 [1770]	450 [3983]		2000 [450]	2500 [562]	13.120									
PGB155-15A6	\$1,770.00	155	15:1	triple	200 [1770]	400 [3540]	750 [6638]	9	2000	4000	5400 [1214]	4900 [1102]	15.070	88	20.4 [45.0]	SV(2)M-220(B)				
PGB155-25A6	\$1,770.00		25:1	triple	300 [2655]	600 [5310]	1100 [9736]				6400 [1439]	6100 [1371]	14.820							
PGB155-05A6	\$1,401.00		5:1	double	200 [1770]	400 [3540]	1100 [9736]	6			3800 [854]	3000 [674]	21.280				93	19.8 [43.7]	SV(2)M-220(B) SV(2)M-230(B)	
PGB155-10A6	\$1,401.00		10:1	double	200 [1770]	400 [3540]	750 [6638]				4700 [1057]	4100 [922]	19.030							



Precision Servo Gearboxes

Dimensions – Right-Angle Shaft PGB Series

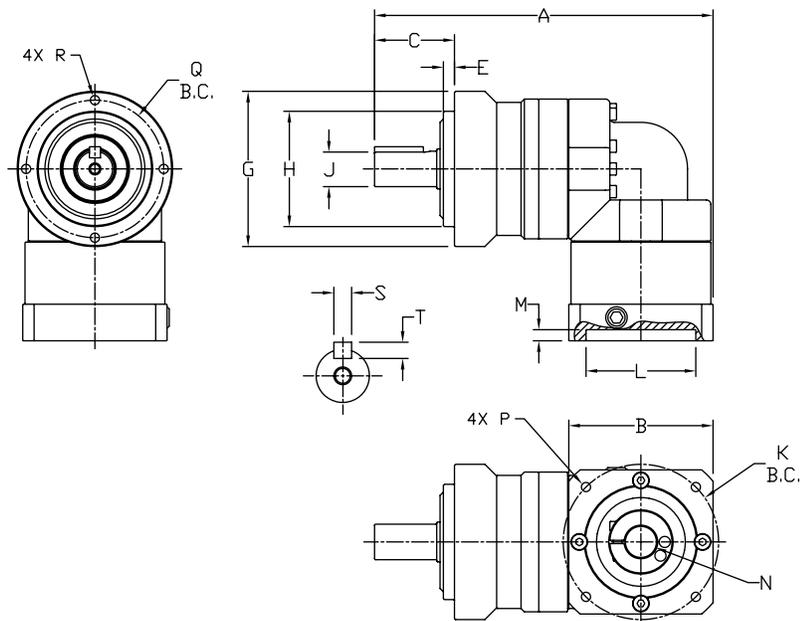

SureGear PGB Series Right-Angle Shaft Gearboxes Dimension Drawing

SureGear® Precision Servo Gearbox Dimensions – Right-Angle Shaft PGA Series (dimensions = mm [in])																
Part Number	A	B	C	E	G	H	J	K	L	M	N	P	Q	R	S	T
PGB070-05A1	151.5 [5.96]	52.0 [2.05]	36.0 [1.42]	5.0 [0.20]	Ø70.0 [Ø2.76]	Ø52.0 [Ø2.05]	Ø16.0 [Ø0.63]	Ø46.0 [Ø1.81]	Ø30.0 [Ø1.18]	5.0 [0.20]	Ø8.0 [Ø0.31]	M4-0.7x9	Ø62.0 [Ø2.44]	M5-0.8x10	5.0 [0.20]	5.0 [0.20]
PGB070-10A1		65.0 [2.56]						Ø70.0 [Ø2.76]	Ø50.0 [Ø1.97]		Ø14.0 [Ø0.55]	M5-0.8x11				
PGB070-05A2	158.0 [6.22]	52.0 [2.05]	36.0 [1.42]	5.0 [0.20]	Ø70.0 [Ø2.76]	Ø52.0 [Ø2.05]	Ø16.0 [Ø0.63]	Ø46.0 [Ø1.81]	Ø30.0 [Ø1.18]	5.0 [0.20]	Ø8.0 [Ø0.31]	M4-0.7x9	Ø62.0 [Ø2.44]	M5-0.8x10	5.0 [0.20]	5.0 [0.20]
PGB070-10A2		65.0 [2.56]						Ø70.0 [Ø2.76]	Ø50.0 [Ø1.97]		Ø14.0 [Ø0.55]	M5-0.8x11				
PGB070-15A1	163.5 [6.44]	52.0 [2.05]	36.0 [1.42]	5.0 [0.20]	Ø70.0 [Ø2.76]	Ø52.0 [Ø2.05]	Ø16.0 [Ø0.63]	Ø46.0 [Ø1.81]	Ø30.0 [Ø1.18]	5.0 [0.20]	Ø8.0 [Ø0.31]	M4-0.7x9	Ø62.0 [Ø2.44]	M5-0.8x10	5.0 [0.20]	5.0 [0.20]
PGB070-25A1		65.0 [2.56]						Ø70.0 [Ø2.76]	Ø50.0 [Ø1.97]		Ø14.0 [Ø0.55]	M5-0.8x11				
PGB070-15A2	204.5 [8.05]	65.0 [2.56]	36.0 [1.42]	5.0 [0.20]	Ø70.0 [Ø2.76]	Ø52.0 [Ø2.05]	Ø16.0 [Ø0.63]	Ø70.0 [Ø2.76]	Ø50.0 [Ø1.97]	6.0 [0.24]	Ø19.0 [Ø0.75]	M6-1.0x13	Ø80.0 [Ø3.15]	M6-1.0x12	6.0 [0.24]	6.0 [0.24]
PGB070-25A2		80.0 [3.15]						Ø90.0 [Ø3.54]	Ø68.0 [Ø2.68]		Ø22.0 [Ø0.87]	Ø90.0 [Ø3.54]				
PGB090-15A2	205.5 [8.09]	80.0 [3.15]	46.0 [1.81]	7.0 [0.28]	Ø90.0 [Ø3.54]	Ø68.0 [Ø2.68]	Ø22.0 [Ø0.87]	Ø90.0 [Ø3.54]	Ø70.0 [Ø2.76]	6.0 [0.24]	Ø19.0 [Ø0.75]	M6-1.0x13	Ø80.0 [Ø3.15]	M6-1.0x12	6.0 [0.24]	6.0 [0.24]
PGB090-25A2		100.0 [3.94]						Ø115.0 [Ø4.53]	Ø95.0 [Ø3.74]		Ø19.0 [Ø0.75]	M6-1.0x13				
PGB090-05A3	210.5 [8.29]	80.0 [3.15]	46.0 [1.81]	7.0 [0.28]	Ø90.0 [Ø3.54]	Ø68.0 [Ø2.68]	Ø22.0 [Ø0.87]	Ø90.0 [Ø3.54]	Ø70.0 [Ø2.76]	6.0 [0.24]	Ø19.0 [Ø0.75]	M6-1.0x13	Ø80.0 [Ø3.15]	M6-1.0x12	6.0 [0.24]	6.0 [0.24]
PGB090-10A3		100.0 [3.94]						Ø115.0 [Ø4.53]	Ø95.0 [Ø3.74]		Ø19.0 [Ø0.75]	M6-1.0x13				
PGB090-15A3	210.5 [8.29]	80.0 [3.15]	46.0 [1.81]	7.0 [0.28]	Ø90.0 [Ø3.54]	Ø68.0 [Ø2.68]	Ø22.0 [Ø0.87]	Ø90.0 [Ø3.54]	Ø70.0 [Ø2.76]	6.0 [0.24]	Ø19.0 [Ø0.75]	M6-1.0x13	Ø80.0 [Ø3.15]	M6-1.0x12	6.0 [0.24]	6.0 [0.24]
PGB090-25A3		100.0 [3.94]						Ø115.0 [Ø4.53]	Ø95.0 [Ø3.74]		Ø19.0 [Ø0.75]	M6-1.0x13				
PGB090-05A4	205.5 [8.09]	80.0 [3.15]	46.0 [1.81]	7.0 [0.28]	Ø90.0 [Ø3.54]	Ø68.0 [Ø2.68]	Ø22.0 [Ø0.87]	Ø90.0 [Ø3.54]	Ø70.0 [Ø2.76]	6.0 [0.24]	Ø19.0 [Ø0.75]	M6-1.0x13	Ø80.0 [Ø3.15]	M6-1.0x12	6.0 [0.24]	6.0 [0.24]
PGB090-10A4		100.0 [3.94]						Ø115.0 [Ø4.53]	Ø95.0 [Ø3.74]		Ø19.0 [Ø0.75]	M6-1.0x13				
PGB120-15A4	272.0 [10.71]	130.0 [5.12]	70.0 [2.76]	9.0 [0.35]	Ø120.0 [Ø4.72]	Ø90.0 [Ø3.54]	Ø32.0 [Ø1.26]	Ø145.0 [Ø5.71]	Ø110.0 [Ø4.33]	8.0 [0.31]	Ø22.0 * [Ø0.87]	M8-1.25x17	Ø108.0 [Ø4.25]	M8-1.25x16	10.0 [0.39]	8.0 [0.31]
PGB120-25A4		266.0 [10.47]						Ø145.0 [Ø5.71]	Ø110.0 [Ø4.33]		Ø22.0 * [Ø0.87]	M8-1.25x17				
PGB120-05A5	272.0 [10.71]	130.0 [5.12]	70.0 [2.76]	9.0 [0.35]	Ø120.0 [Ø4.72]	Ø90.0 [Ø3.54]	Ø32.0 [Ø1.26]	Ø145.0 [Ø5.71]	Ø110.0 [Ø4.33]	8.0 [0.31]	Ø22.0 * [Ø0.87]	M8-1.25x17	Ø108.0 [Ø4.25]	M8-1.25x16	10.0 [0.39]	8.0 [0.31]
PGB120-10A5		266.0 [10.47]						Ø145.0 [Ø5.71]	Ø110.0 [Ø4.33]		Ø22.0 * [Ø0.87]	M8-1.25x17				
PGB120-15A5	268.5 [10.57]	130.0 [5.12]	70.0 [2.76]	9.0 [0.35]	Ø120.0 [Ø4.72]	Ø90.0 [Ø3.54]	Ø32.0 [Ø1.26]	Ø145.0 [Ø5.71]	Ø110.0 [Ø4.33]	8.0 [0.31]	Ø22.0 * [Ø0.87]	M8-1.25x17	Ø108.0 [Ø4.25]	M8-1.25x16	10.0 [0.39]	8.0 [0.31]
PGB120-25A5		266.0 [10.47]						Ø145.0 [Ø5.71]	Ø110.0 [Ø4.33]		Ø22.0 * [Ø0.87]	M8-1.25x17				
PGB120-05A6	341.0 [13.43]	180.0 [7.09]	97.0 [3.82]	12.0 [0.47]	Ø155.0 [Ø6.10]	Ø120.0 [Ø4.72]	Ø40.0 [Ø1.57]	Ø200.0 [Ø7.87]	Ø114.0 [Ø4.50]	8.0 [0.31]	Ø35.0 * [Ø1.38]	M12-1.75x25	Ø140.0 [Ø5.51]	M10-1.5x20	12.0 [0.47]	8.0 [0.31]
PGB120-10A6		268.5 [10.57]						Ø145.0 [Ø5.71]	Ø110.0 [Ø4.33]		Ø22.0 * [Ø0.87]	M8-1.25x17				
PGB155-05A6	364.0 [14.33]	180.0 [7.09]	97.0 [3.82]	12.0 [0.47]	Ø155.0 [Ø6.10]	Ø120.0 [Ø4.72]	Ø40.0 [Ø1.57]	Ø200.0 [Ø7.87]	Ø114.0 [Ø4.50]	8.0 [0.31]	Ø35.0 * [Ø1.38]	M12-1.75x25	Ø140.0 [Ø5.51]	M10-1.5x20	12.0 [0.47]	8.0 [0.31]
PGB155-10A6		268.5 [10.57]						Ø145.0 [Ø5.71]	Ø110.0 [Ø4.33]		Ø22.0 * [Ø0.87]	M8-1.25x17				
PGB155-15A6	364.0 [14.33]	180.0 [7.09]	97.0 [3.82]	12.0 [0.47]	Ø155.0 [Ø6.10]	Ø120.0 [Ø4.72]	Ø40.0 [Ø1.57]	Ø200.0 [Ø7.87]	Ø114.0 [Ø4.50]	8.0 [0.31]	Ø35.0 * [Ø1.38]	M12-1.75x25	Ø140.0 [Ø5.51]	M10-1.5x20	12.0 [0.47]	8.0 [0.31]
PGB155-25A6		268.5 [10.57]						Ø145.0 [Ø5.71]	Ø110.0 [Ø4.33]		Ø22.0 * [Ø0.87]	M8-1.25x17				

* Dimension with supplied bushing

NOTE: See our website: www.AutomationDirect.com for complete engineering drawings.



Precision Servo Gearboxes

SureGear® Servo Gearbox Replacement Parts



SureGear® Precision Servo Gearboxes – Replacement Parts		
Part Number	Price	Description
<u>PG050-KEY</u>	\$4.50	Output Shaft Key, replacement, 4 x 4 x 14 mm, for SureGear PGA050 series gearboxes.
<u>PG070-KEY</u>	\$4.50	Output Shaft Key, replacement, 5 x 5 x 22 mm, for SureGear PGA070 and PGB070 series gearboxes.
<u>PG090-KEY</u>	\$4.50	Output Shaft Key, replacement, 6 x 6 x 28 mm, for SureGear PGA090 and PGB090 series gearboxes.
<u>PG120-KEY</u>	\$4.50	Output Shaft Key, replacement, 10 x 8 x 45 mm, for SureGear PGA120 and PGB120 series gearboxes.
<u>PG155-KEY</u>	\$4.50	Output Shaft Key, replacement, 12 x 8 x 65 mm, for SureGear PGA155 and PGB155 series gearboxes.
<u>PGA4-A5-BUSH</u>	\$22.50	Input Shaft Bushing, replacement, 28 x 22 x 30.5 mm, for all SureGear gearboxes using SV(2)L-210(B) and SV(2)M-210(B) SureServo motors.
<u>PGA6-BUSH</u>	\$22.50	Input Shaft Bushing, replacement, 38 x 35 x 36 mm, for all SureGear gearboxes using SV(2)M-220(B) and SV(2)M-230(B) SureServo motors.