

# Dome Stations

## CFA Series

The Edwards 7633 Series Dome Stations are used to visually and audibly indicate the placement of calls from a connected pull station. Stations are available with 2 or 4 lamps; the domes are designed with barriers between the lamps to prevent visual interference of signals. The 7633 mounts in a standard double gang box with a plaster cover and a minimum depth of 1 3/4" (44mm). Boxes and plaster covers not supplied.

### Features and Specifications

- Available with 2 or 4 lamps
- Internal buzzer
- Stainless steel faceplate
- White dome





### Ordering Information

Description	Cat. No.	Operating Voltage	VA Per Lamp	Lamps	Replacement		
					Dome	Lamp - Clear/Red	Buzzer
2 Lamp Station	7633-2	24V AC	4.0	1 clear, 1 red	P-047047-0006	Industry Trade No. 509K <sup>1</sup> / P-036350-0001 (24V)	115-1G5
4 Lamp Station	7633-4	24V AC	5.0	2 clear, 2 red	P-047047-0006	Industry Trade No. 313 <sup>1</sup> / P-036350-0001 (24V)	115-1G5

<sup>1</sup>User supplied

### Weights and Dimensions

Cat. No.	Approx. Net Weight (lb.)	Approx. Shipping Weight (lb.)
7633-2	0.69	0.89
7633-4	0.75	0.95

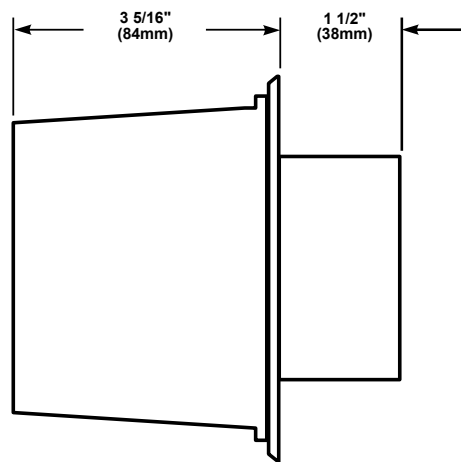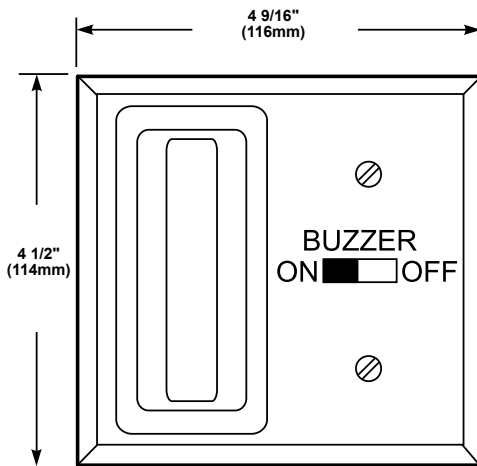

6 CALL FOR ASSISTANCE