



MB MOUNTING BRACKETS				
CATALOG NUMBER				HUB SIZE
PENDANT	CEILING	WALL	STANCHION	
MBA-2	MBX-2	MBB-2	—	3/4"
MBA-3	MBX-3	MBB-3	—	1"
—	MBX-8*	—	—	M20
—	—	—	MBD-4	1-1/4"
—	—	—	MBD-5	1-1/2"

* MBX-8 furnished with 3 non-metallic (Ex) plugs



EBRS



EMRS



ENY-2SET

MB ACCESSORIES	
CATALOG NUMBER	DESCRIPTION
EMRS	MB medium base replacement socket (E26)
EBRS	MB Bi-Pin base replacement socket
MPL13	Replacement lamp for MBF and EBF series
ENY-2SET	3/4" ENY seal with set screw for sealed (Ex nR) pendant installations
ENY-3SET	1" ENY seal with set screw for sealed (Ex nR) pendant installations



MB BALLAST TANK ^④			
LAMP TYPE	LAMP WATTAGE	VOLTAGE 60 HZ	CATALOG NUMBER
FL	13	120	MBF131
	26	120	MBF261
	39	120	MBF391
HPS	50	120	MBL501
	70	120	MBL701
	100	120	MBL101
	150	120	MBL151
MH	50	120/208/240/277	MBH500
	70	120/208/240/277	MBH700
	100	120/208/240/277	MBH100

^④ Catalog numbers shown are 120 volt (except Metal Halide). Consult catalog number logic on page L22 and change sixth character to indicate other available voltages.

MB BALLAST DATA									
LAMP TYPE			STARTING AMPS	OPERATING AMPS	OPEN CIRCUIT AMPS	INPUT WATTS MAX	BALLAST CIRCUIT	REGULATIONS	MINIMUM START TEMPERATURE
LAMP	WATTS	VOLTS - VAC							
FL ^①	13	120/277	.39/.35	.30/.3	—	16	NPF	—	0°F -18°C
HPS	50	120	.75	.55	.90	60	HX-HPF ^②	±5% Line voltage ^③	-40°F -40°C
	70	120	.85	.75	1.30	82	HX-HPF ^②	±5% Line voltage ^③	-40°F -40°C
	100	120	1.50	1.05	1.80	115	HX-HPF ^②	±5% Line voltage ^③	-40°F -40°C
	150	120	2.20	1.50	2.35	170	HX-HPF ^②	±5% Line voltage ^③	-40°F -40°C
MH	50	120/208 240/277	.87/.51/.47/.39	.6/.35/.3/.25	1.6/.67/.57/.5	67	HX-HPF ^②	±5% Line voltage ^③ ±12% Lamp watts ^③	-20°F -30°C
	70	120/208 240/277	.8/.5/.43/.39	.85/.5/.43/.37	1.7/1.04/.87/.78	95	HX-HPF ^②	±5% Line voltage ^③ ±12% Lamp watts ^③	-20°F -30°C
	100	120/208 240/277	1.2/.8/.65/.6	1.15/.66/.58/.5	2.3/1.4/1.15/1.0	129	HX-HPF ^②	±5% Line voltage ^③ ±12% Lamp watts ^③	-20°F -30°C

^① Per lamp, max available lamps @ 120 volt is .3; max @ 277 volt is .2.

^② Ballasts are High Power Factor 90%+.

^③ Lamp watts within ANSI Trapezoid limitations.





Exit Sign Accessory

Hazardous Locations Exit Sign

Applications


For use in hazardous areas to mark exits over doorways and in hallways.

Features

- Three sided illuminated sign visible from all three sides
- EXIT printed in 6" high red letters with 3/4" strokes as required by OSHA. Sign has open bottom providing light on exit area while illuminating the panel

EXIT SIGN	
CATALOG NUMBER	DESCRIPTION
HEXA-100	Fits EMI15, EMI20, EBF/EQF/EEQ Series without guard * (Fixture not included)

* EQF to 42W

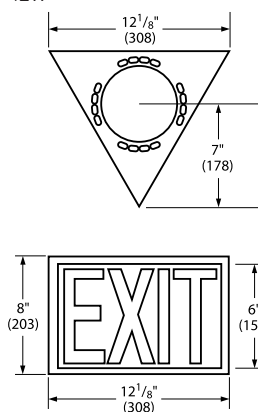

Replacement Globe & Support Assemblies

REPLACEMENT GLOBE AND GLOBE SUPPORTS			
CATALOG NUMBER ^①	SERIES	LAMP TYPE	MAX. WATTAGE
EMGS1	EMI15	INC	150
	EMI20	INC	300
	EBF13/26	PL Bi-Pin Fluorescent	26
	EQF	PL Quad-Pin Fluorescent	26, 32, 42
EMGS2 ^② EMGS3	EMI30	INC	300
	EMS	HPS	150
	EMH	MH	100
	EQF	PL Quad-Pin Fluorescent	52, 62, 84

① EMGS1, EMGS3 are internally fluted glass.

② EMGS2 is smooth clear glass used for ESX strobe.



EM Series



EB Series



**Female
EZTB**



**Male
EZCB**

REPLACEMENT SOCKETS	
CATALOG NUMBER	DESCRIPTION
EMRS	EM Series E-26 Medium Base
EBRS	EB Series

REPLACEMENT CONNECTION BLOCKS	
CATALOG NUMBER	DESCRIPTION
EZTB	Female
EZCB	Male

COLORED GLOBE KITS FOR HAZARDOUS LOCATIONS ^②	
KIT NO.	GLOBE COLOR
KT-100SU41R	RED
KT-100SU41G	GREEN

Used to modify EMI20 Series only fixtures to accept a colored inner globe. The kit includes the globe plus an adapter assembly and mounting instructions.

② Maximum lamp size A-21 150 Watt.

REPLACEMENT FLUORESCENT LAMPS	
CATALOG NUMBER	SIZE & TYPE
MPL13	13W Bi-Pin
MQL26	26W Quad-Pin
MQL32	32W Quad-Pin
MQL42	42W Quad-Pin



KILLARK®