


RC4 SERIES™ POKE-THRU DEVICES



RC4 Series™ Surface Style Poke-Thru Devices provide two (2) 20 Amp duplex power devices and four (4) ports of communication.

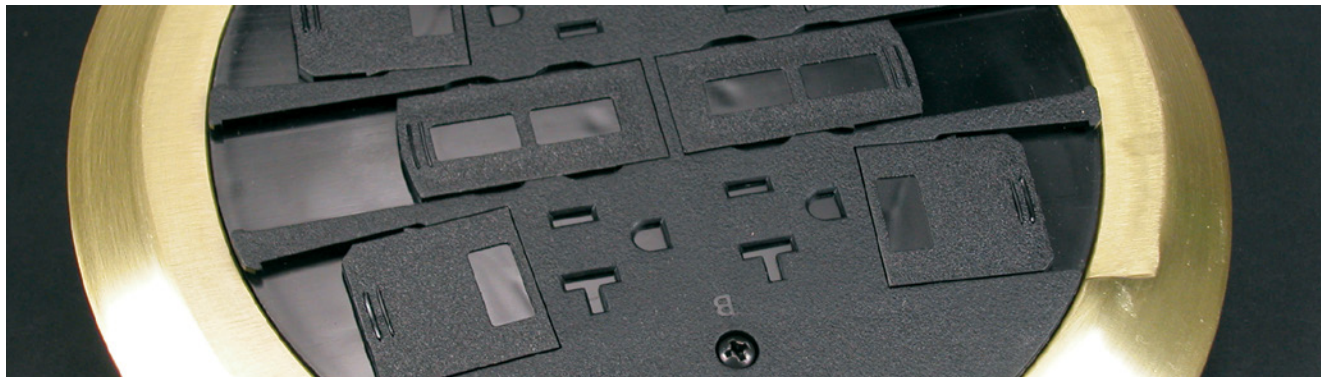


Download this product's PEP ecopassport, environmental product declaration at www.legrand.us/resources-and-downloads. This declaration conforms with ISO 14025 and 14040 and is in alignment with EN 15804.

CODE REFERENCE

cULus Listed Metallic Outlet Boxes:
File E2961 Guide QCIT.

cULus Listed Nonmetallic Outlet Boxes & Fittings Classified for Fire Resistance:
File R8209 Guide CEYY.

Meets Article 300.21, 300.22(C) & 314 of NEC.

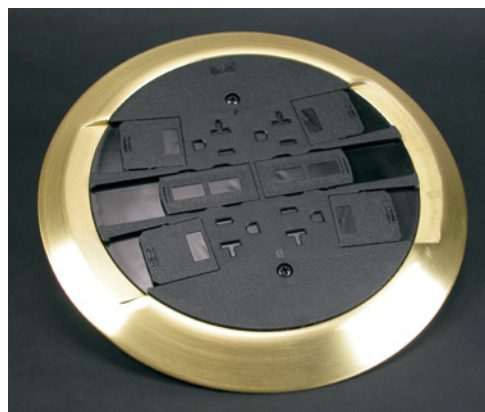


RC4 Series Poke-Thru Device (RC4CTCBS).

HOLE DIAMETER

Minimum:	4" (102mm)
Maximum:	4 1/8" (105mm)

RC4 Series Poke-Thru Devices
Ordering Information


RC4STC Insert Assembly with Disposable Plate

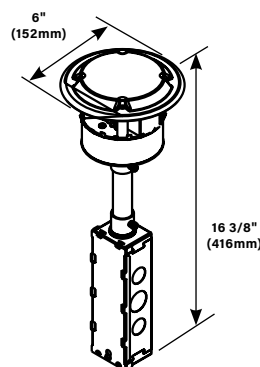

Comes complete with four prewired 20A receptacles. Use RC4STC with RC4C Series Covers.

NOTE: If wiring for Isolated Ground, attach orange IG label (supplied).

Slide Holder



PART NUMBERS:

RC4SHTCGY (Gray)
RC4SHTCBK (Black)
RC4SHTCBS (Brass)
RC4SHTCAA (Aluminum)

Nonmetallic slide holder assembly.

NOTE: Assembled with scrub water gasket.
For use on tile or carpet floors.

COLOR OPTIONS




RC4 Series parts are available in gray "GY", black "BK", brushed aluminum "AL", brass "BS", brass-colored finish "AB" and an aluminum-colored finish "AA".

RC4 SERIES™ POKE-THRU DEVICES

RC4 Series Poke-Thru Devices Ordering Information (continued)

Retrofit Kit



PART NUMBERS:

RC4KTCBK (Black)
RC4KTCGY (Gray)
RC4KTCAL (Aluminum)
RC4KTCBS (Brass)


Used to upgrade existing installations of RC4 poke-thru devices on carpet floors to meet scrub water requirements. Includes two TR 20A duplex receptacles that can be wired as a standard duplex or isolated

ground. Also includes scrub water finish flange and slide holder assembly. See installation instructions with retrofit kit for complete installation details.

NOTE: Existing installations of RC4 poke-thru devices are not required to be upgraded to meet carpet scrub water requirements, if manufactured prior to June 2003.

NOTE: RC4 Series poke-thru devices require a 4" (102mm) diameter hole. Not designed to work with bare concrete or terrazzo. Floor covering thickness 1/8" minimum.


ABPLUG4 Abandonment Plug Assembly



Complete plug assembly for abandoning an open 4" (102mm) diameter hole. Assembly includes intumescent fire-stop material to maintain the fire classification of the floor, integral retainer ring to prevent the unit from pulling up through the floor and a black die-cast aluminum cover.

NOTE: To abandon the RC4 Series Poke-Thru Device, the internal gasket, duplex receptacle and communication modules must not be removed in order to maintain UL Classification. Also the stem must remain in the core-drilled hole.

RC4REC2, RC4REC2-25 Replacement Receptacles



Two prewired TR 20A duplex receptacles can be wired as standard duplex or isolated ground. Available only in black. See installation instructions with replacement receptacle for complete installation details. RC4REC2-25 is available with 25 foot (7.62m) leads.