


RC7 SERIES™ POKE-THRU DEVICES



RC7 Series™ Surface Style Poke-Thru Devices provide one (1) 20A duplex power device and up to two (2) ports of communication.

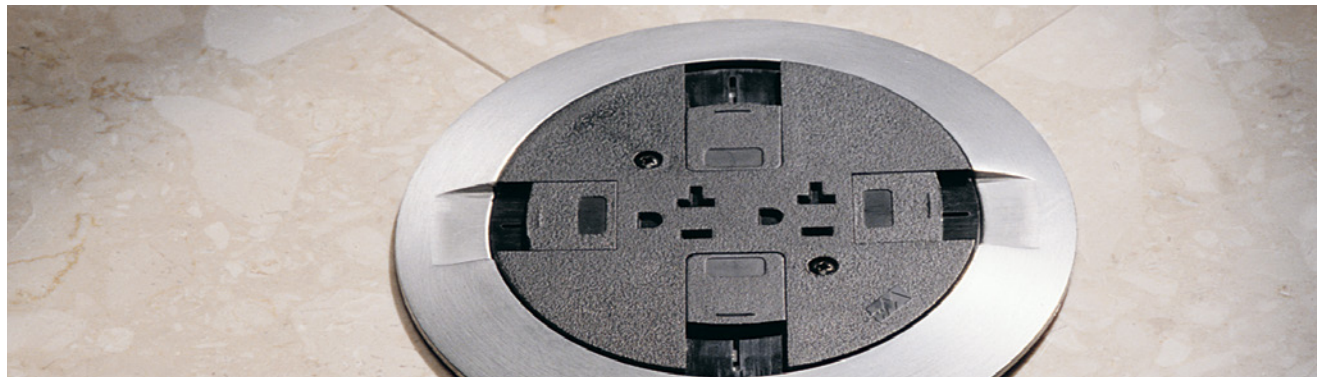

Download this product's PEP ecosport, environmental product declaration at www.legrand.us/resources-and-downloads. This declaration conforms with ISO 14025 and 14040 and is in alignment with EN 15804.

CODE REFERENCE

cULus Listed Metallic Outlet Boxes:
File E2961 Guide QCIT.

cULus Listed Nonmetallic Outlet Boxes & Fittings Classified for Fire Resistance:
File R8209 Guide CEYY.

Meets Article 300.21, 300.22(C) & 314 of NEC.




RC7 Series Poke-Thru Device.

HOLE DIAMETER

Minimum:	3 1/16" (78mm)
Maximum:	3 1/8" (79mm)


RC7 Series Poke-Thru Devices
Ordering Information

RC7STC Insert Assembly with Disposable Plate

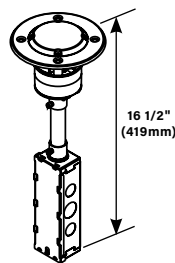

Complete with one piece disposable cover to protect the device during the construction process. Unit comes with a 3/4" conduit feed, junction box for power and two 1/2" openings for low voltage pass through. Use with the RC7CTC and RC7CFFTC covers.

Finished Flange & Slide Holder Assembly

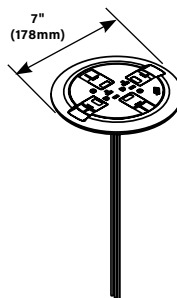

PART NUMBERS:

RC7CTCAA (All Aluminum)
RC7CTCAB (All Brass)
RC7CTCGY (Gray)
RC7CTCBK (Black)
RC7CTCAL (Aluminum)
RC7CTCBS (Brass)

Prewired TR 20A duplex receptacle can be wired as standard duplex or isolated ground. Aluminum and brass flanges shipped with black slide cover. Includes Wiremold Open System unloaded inserts.

NOTE: Includes two Cat 6 TechChoice discrete keystone connectors, two Ortronics TracJack adapters and two Wiremold Open System adapters.

COLOR OPTIONS




RC7 Series parts are available in gray "GY", black "BK", brushed aluminum "AL", brass "BS", brass-colored finish "AB" and an aluminum-colored finish "AA".

Custom color options are also available. Consult the factory for more information.

RC7 SERIES™ POKE-THRU DEVICES

RC7 Series Poke-Thru Devices Ordering Information (continued)


Poke-Thru Controlled Receptacle


PART NUMBERS:

RC7SHTCBKCR (Black)
RC7SHTCBSCR (Brass)
RC7SHTCGYCR (Gray)
RC7SHTCAACR (Aluminum)

Nonmetallic slide holder assembly with controlled receptacle markings. Markings are located in a recess pad and are permanent indicating the duplex receptacle below has been wired up to comply with 2014 NEC, CA Title 24 and ASHRAE Energy Efficiency Standard 90.1. Available in Black (BK), Brass (BS), Gray (GY) and Aluminum (AA). Slide holder to be used with RC7ATC and RC7CTC units.

Assembled Poke-Thru Device


PART NUMBERS:


RC7ATCAA (All Aluminum)
RC7ATCAB (All Brass)
RC7ATCGY (Gray)
RC7ATCBK (Black)
RC7ATCAL (Aluminum)
RC7ATCBS (Brass)

Prewired TR 20A duplex receptacle can be wired as standard duplex or isolated ground. Aluminum and brass flanges shipped with black slide cover. Includes Wiremold Open System unloaded inserts.

NOTE: Assembled with scrub water gasket. For use on tile or carpet floors.

NOTE: RC7 Series poke-thru devices require a 3 1/16" (78mm) diameter hole. Not designed to work with bare concrete or terrazzo. Floor covering thickness 1/8" minimum.


Slide Holder Assembly


PART NUMBERS:

RC7SHTCGY (Gray)
RC7SHTCBK (Black)
RC7SHTCAA (Aluminum)
RC7SHTCBS (Brass)

Nonmetallic slide holder assembly. Assembled with scrub water gasket. For use on tile or carpet floors.


Abandonment Plate


PART NUMBERS:

RC7APTCGY (Gray)
RC7APTCBK (Black)


NOTE: To abandon the RC7 Series Poke-Thru Device, the internal gasket, duplex receptacle and communication modules must not be removed in order to maintain UL Classification. Also the stem must remain in the hole.

RC37REC, RC37REC-25 Replacement Receptacle




Prewired snap-in TR 20A receptacle can be wired as standard duplex or isolated ground. Available only in black. See installation instructions with replacement receptacle for complete installation details. The RC37REC-25 is available with 25 foot leads and can be wired as standard duplex or isolated ground.

ABPLUG3 Abandonment Plug Assembly



Complete plug assembly for abandoning an open 3" (76mm) diameter hole. Assembly includes intumescent fire-stop material to maintain the fire-classification of the floor, integral retainer ring to prevent the unit from pulling up through the floor and a black die-cast aluminum cover.

COM75 Communication Adapter



For two 3/4" trade size conduit connections (COM75). No additional capacity with COM75.

NOTE: RC7 Series poke-thru devices require a 3 1/16" (78mm) diameter hole. Not designed to work with bare concrete or terrazzo. Floor covering thickness 1/8" minimum.