



NA16A4N, Substation - Aluminum Bolted Terminal, 1-1/4" IPS, 4-Hole

By Burndy
Catalog # [NA16A4N](#)

Cu Alloy Terminal, 1-1/4 IPS Al or Cu, 230 kV, 4 Pad Holes, 1.75 IN Spacing, 7.00 IN L, 3.40 IN W, Bolted, Tube to Flat, 0.56 IN Hole Dia

Features

- Type NA-A Aluminum Terminals for Tube to Pad
- Properly proportioned to minimize conductor corrosion due to galvanic action
- When properly used, this item does not require use of bimetallic plates, contact Burndy Technical Support for recommendations
- One-wrench installation

Application

Substation

Specifications


Certification - UL Recognized	No
Certification - cULus	No
Certification - ETL	No
Standards - RoHS Compliance Status	CM
UL Listed	No
Certification - CSA Approved	No

Conductor

Conductor - AL Tube Std Size Range	1 1/4 IPS
Conductor - AL Tube Std Size	1 1/4 IPS
Number Of Conductors	1
Conductor - Connection Combination	Tube to Flat
Conductor Type	• AL Tube Std-Size • CU Tube Std-Size
Conductor - Copper Tube Std Size Range	1 1/4 IPS IPS
Conductor - Copper Tube Std Size	1 1/4 IPS IPS

Configuration

Physical Attribute - Pad Orientation	Straight
Physical Attribute - Pad Configuration	3 x 3 - 4 holes
Physical Attribute - Pad Alignment	Offset
Physical Attribute - Number of Holes	4

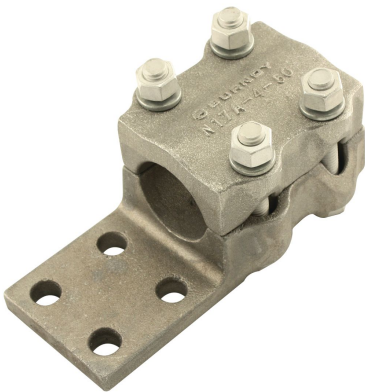

Connector Type	Terminal
Dimensions	
Dimension - G inch	1.60 in
Dimension - Pad Width inch	3.00 in
Package Height	0.000 in
Dimension - Height mm	85.9 mm
Dimension - Hole Size fraction	9/16
Dimension - Height inch	3.38 in
Dimension - Height fraction	3-3/8
Package Weight	0.000 lb.
Package Length	0.000 in
Dimension - F Width Center to Center inch	1.75 in
Package Width	0.000 in
Dimension - L Length Overall mm	178 mm
Dimension - Width fraction	3-7/16 in
Dimension - B Length fraction	3-3/4 in
Dimension - Width mm	86 mm
Dimension - Width inch	3.40 in
Dimension - B Length inch	3.75 in
Dimension - D inch	3.00 in
Dimension - N inch	0.62 in
Dimension - Length Overall inch	7.00 in
Force Related	
Installation Torque Recommended in-lb	300 LBS/in
General	
Material - Hardware	Aluminum
One Wrench Installation	Y
Plated	N
Clamping Element Design UPC	Body and Cap 781810003701
Material	Aluminum Alloy
Plating Type	Unplated
UPC 12 Digit	781810003701
UPC 14 Digit GTIN	00781810003701
Logistics	
Minimum Pack Quantity	6
Pallet Quantity	700



A Hubbell brand