



NA22A66N, Substation - Aluminum Bolted Terminal

By Burndy
Catalog # [NA22A66N](#)

Substation Connectors

Features

- Type NA-A Aluminum Terminals for Tube to Pad
- Properly proportioned to minimize conductor corrosion due to galvanic action
- When properly used, this item does not require use of bimetallic plates, contact Burndy Technical Support for recommendations
- One-wrench installation

Application

Substation

Specifications

Certification - ETL	No
Certification - UL Recognized	No
Standards - RoHS Compliance	CM
Status	
Certification - cULus	No
UL Listed	No
Certification - CSA Approved	No


Conductor

Conductor Type	• AL Tube Std-Size • CU Tube Std-Size
----------------	---

Configuration

Physical Attribute - Pad Orientation	Straight
Connector Type	Terminal

Dimensions

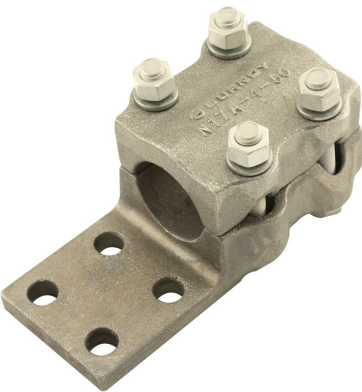

Dimension - G inch	2.94 in
Dimension - Pad Width inch	6.00 in
Dimension - Height mm	157.7 mm
Dimension - Height inch	6.21 in
Dimension - Width mm	168 mm
Dimension - Width inch	6.63 in
Dimension - F Width Center to Center inch	1.75 in
Dimension - L Length Overall mm	292 mm
Dimension - B Length inch	6.00 in
Dimension - D inch	4.00 in
Dimension - N inch	1.12 in
Dimension - Length Overall inch	11.51 in

General

Plated	N
Material - Hardware	Aluminum
UPC	781810512548
Material	Aluminum Alloy
Plating Type	Unplated
UPC 12 Digit	781810512548
UPC 14 Digit GTIN	00781810512548

Logistics

Minimum Pack Quantity	1
Pallet Quantity	1
Carton Quantity	1

Product Assets

[Catalog \[English\]](#)