

# Small Dimension Time-Delay MDL Fuses



## Features

- Compact dimensions 1/4" x 1-1/4", (6.3mm x 32mm)
- Glass tube construction with nickel-plated brass end caps
- Time-delay
- RoHS Compliant

## Applications

- Supplemental protection for electronic applications

## MDL Specifications

Voltage Rating: MDL - See table below

Ampere Rating: 0.0625 - 20 Amps

Interrupting Rating: See table below

## Environmental Data

- Shock: 0.0625A MIL-STD-202, Method 213, Test Condition I;
- 1A thru 20A: MIL-STD-202, Method 207, (HI shock)
- Vibration: 0.0625A: MIL-STD-202, Method 201;  
0.25A thru 20A: MIL-STD-202, Method 204, Test condition C (except 5g, 500 HZ)

## Agency Approvals

- UL Listed product meets standard 248-14
- UL Listed Card: MDL 0.0625-8A (Guide JDYX, File E19180)
- UL Recognized Card: MDL 9-20A (Guide JDYX2, File E19180)
- CSA Certification File 053787: MDA 0.25-15A (Class No. 1422-01)
- RoHS

MDL Small Dimension Time-Delay Fuses										
Part Number	AMP Rating	Rated Voltage	AC Interrupting Rating*			Melting I2t**	Voltage Drop mv***	Pcs/Pkg	Package Weight (lb.)	Price
		AC Max	250V	125V	32V					
<b>MDL-0625</b>	0.0625	250V	35A	10000A	-	0.0046	2.79	5	0.1	\$24.00
<b>MDL-25</b>	0.25					0.447	0.965			\$14.50
<b>MDL-5</b>	0.5					1.656	1.27			\$12.00
<b>MDL1</b>	1					11.498	0.995			\$13.50
<b>MDL1-5</b>	1.5					22.7	0.721			\$10.50
<b>MDL2</b>	2					62.3	0.644			\$10.50
<b>MDL2-5</b>	2.5					63.1	0.410			\$11.00
<b>MDL3</b>	3					67.5	0.345			\$10.50
<b>MDL4</b>	4		19.3			0.187	\$10.50			
<b>MDL5</b>	5		32.0			0.160	\$10.50			
<b>MDL6</b>	6		37.4			0.155	\$10.50			
<b>MDL6-25</b>	6.25		38.7			0.152	\$11.00			
<b>MDL7</b>	7		42.7			0.140	\$11.00			
<b>MDL8</b>	8		47.8			0.119	\$10.50			
<b>MDL10</b>	10		64.4			0.114	\$13.50			
<b>MDL15</b>	15		32V			-	-			1000A
<b>MDL20</b>	20	2914.0		0.530	\$14.00					

\*Note: Interrupting ratings were measured at 70% - 80% power factor on AC, and at a time constant described in UL 198L.  
 \*\* Typical Melting I2t (A2Sec) - measured at listed interrupting rating and rated voltage (at 70% to 80% power factor on AC)  
 \*\*\* Typical Voltage Drop - measured at 25°C ± 3°C ambient temperature at rated current.


For mounting and wiring MDL fuses, see our DN-F6 Series fuse blocks in the Terminal Blocks and Wiring Solutions section.

CROSS REFERENCE			
OLD EDISON	BUSSMANN	MERSEN GOULD	LITTELFUSE
BDL	MDL	GDL	313


# Small Dimension Time-Delay MDL Fuses



## TIME CURRENT CURVE

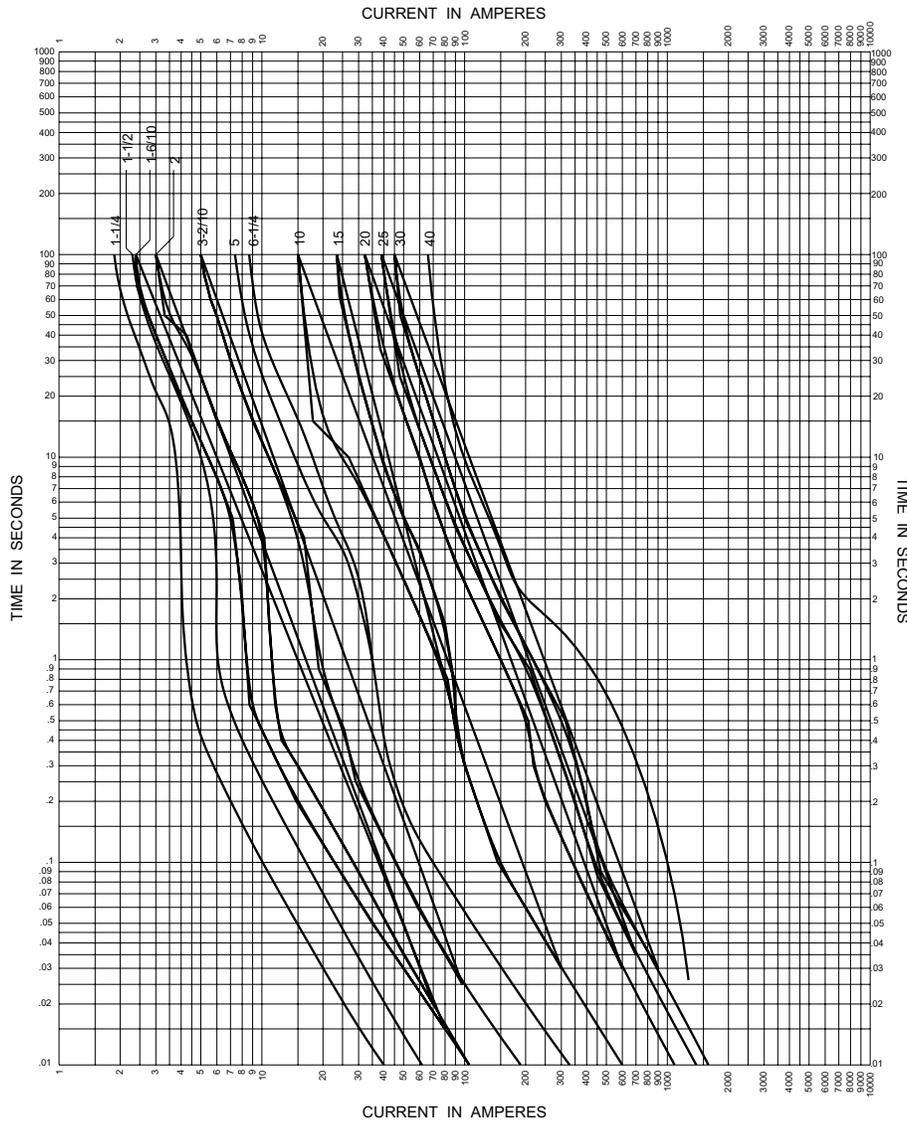

### Dimensions (mm/inches)

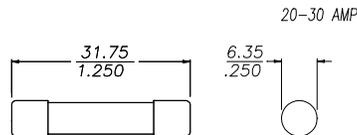

MDL Electrical Characteristics		
Rated Current	% of Amp Rating	Opening Time
0.0625 to 20 Amps	100	None
	135	60 minutes maximum
	200	120 seconds maximum
0.0625 to 3 Amps	200	5 seconds minimum
4 to 8 Amps	200	12 seconds minimum



# Selection Guide

## Line Overview

The Edison family of fuses, fuse blocks and fuse holders is divided into two classes:

1. Current Limiting: Class CC, Class J, Class L, Class RK, Class T
2. General Purpose: Class M Midget and Small Dimension

The fuse selection guide below is a general summary of the

specifications included for each fuse type. This selection guide does not include the many variables that can exist for specific situations such as local codes, unusual temperature, or other operating conditions. When selecting fuses, be sure to comply with any applicable PUBLIC SAFETY standards that apply to Overcurrent Protection Devices (OPD).

Edison Fuses Selection Guide and General Specifications												
Description	Current Limiting											
	Class J		Class RK5		Class RK1		Class T		Class L	Class CC		
Fuse Type	Fast-Acting	Time-Delay	Time-Delay				Extremely Fast-Acting	Fast-Acting	Fast-Acting	Time-Delay		
Part Number	JHL	JDL	ECNR	ECSR	LENRK	LESRK	TJN	TJS	LCU	HCLR	HCTR	EDCC
Voltage Rating	600VAC 450VDC	600VAC 300VDC*	250VAC 125 VDC* (1-200A) 250VDC* (201-600A)	600VAC 300VDC*	250VAC 125 VDC* (10-60A) 250VDC* (70-600A)	600VAC 300VDC*	300VAC 160 VDC (15-600A)	600VAC	600V	600VAC 300VDC (15-20A)	600VAC	600VAC 300VDC (0.5-2.25A) (20-30A)
Amp Rating	1 - 600		1 - 600	3 - 600	10 - 600	5 - 600	1 - 600		601 - 1200	0.5 - 30	0.25 - 30	0.5 - 30
Interrupting Rating	200,000 RMS Symmetrical Amps											
Current Limiting	Class J		Class RK5		Class RK1		Class T		Class L	Class CC		
Agency Approvals	UL Listed Class J Guide JDDZ File E162363 CSA Certified HRCI-J per C22.2, No. 248.8 File 700489 RoHS compliant	UL Listed Class J Guide JDDZ File E162363 CSA Certified HRCI-J per C22.2, No. 248.8 File 700489	UL Listed, Class RK, Guide JDDZ, File E162363 CSA Certified HRCI-R per C22.2, No. 248.12, File 700489 (LENRK CSA File 053787)				UL Listed, Class T, Guide JDDZ, File E162363 CSA Certified HRCI-T per C22.2, No. 248.12, File 53787, Class 1422-02 & 1422-82		UL Listed, Std. 248-10 CSA Certified, HRC-L C22.2 No. 248.10, Class 1422- 02, File 53787	UL Listed to 248.4, Class CC, Guide JDDZ, File E162363, CSA certified HRCI-MISC per C22.2 No. 248.4, File 700489		
Dimensions	See product specification pages.									ferrule (in): 13/32, length (in): 1-1/2		

\* Self-certified DC ratings

Edison Fuses Selection Guide and General Specifications													
Description	General Purpose – Midget				General Purpose – Small Dimension Electronic								
	Fast-Acting		Time-Delay		Fast-Acting Ceramic	Fast-Acting Glass		Medium Time-Delay Glass	Time-Delay Ceramic	Time-Delay Glass	Fast-Acting Glass	Time-Delay Glass	
Part Number	MCL	MOL	MEQ	MEN	ABC	AGC	GMA	GMC	MDA	MDL	S500	S506	
Voltage Rating	600 VAC	250 VAC	500 VAC	250 VAC	250 VAC (0.5 to 30A) 125VDC: (0.5 to 30A)	250VAC: (0.1 to 10A) 32VAC: (15 to 30A)	250VAC (0.063 - 3A) 125VAC (4 - 15A)	250VAC (0.5 - 3A) 125VAC (4 - 10A)	250VAC 125VDC (20A)	250VAC: (0.0625 to 8A) 32VAC: (10 to 20A)	250VAC	250VAC	
Amp Rating	0.5 to 50	0.5 to 30	0.25 to 30	0.5 to 30	0.5 to 30	0.10 to 30	0.063 to 15	0.5 to 10	0.5 to 20	0.0625 to 20	0.032 to 10	0.25 to 6.3	
Interrupting Rating	100,000 RMS Amps	10,000 RMS Amps				See specifications table on product pages							
Current Limiting	N/A				N/A								
Agency Approvals	UL Listed to 248.14, File E162443 CSA Cert. C22.2 Part 59.2, LR 700489				UL Listed standard 248-14 UL Listed Guide and File nos. (ABC 0.25-20 A): (AGC 1/100-10 A) JDYX and E19180 UL Recognition Guide and File nos. (ABC 20-30A):(AGC 11-30) JDYX2 and E19180 CSA Certification Record No: 053787 C 000 and Class No: 1422 01 and 1422 30	Designed to UL/CSA 248-14 UL Listed, Guide JDYX, File E19180 63mA-6A UL Recognition, Guide JDYX2, File E19180, 7A-15A CSA Certified, File 053787_C_000, 63mA-6A Class 1422-01		UL Listed standard 248-14 UL Listed Card: MDA 2/10-20A, MDL 1/16-8A (Guide JDYX, File E19180 UL Recognized Card: MDA 25-30A MDL 9-30A (Guide JDYX2, File E19180) CSA Certification Card: MDA 2/10-15A (Class No. 1422-01)		UL Recognized Guide JDYX2, File E19180 Semko Approval VDE Approval BSI Approval IMQ Approval RoHS compliant			
	RoHS												
Dimensions	ferrule (in): 13/32 length (in): 1-1/2				1/4" x 1-1/4", (6.3mm x 32mm)		0.197" x 0.788" (5mm x 20mm)		1/4" x 1-1/4", (6.3mm x 32mm)		0.197" x 0.788" (5mm x 20mm)		



# Fuse Terminal Blocks

Fuse terminal blocks are available for 1 1/4" x 1/4" and 5x20mm-5x25mm fuses and they are 35mm DIN-rail mountable. These blocks are available with or without a blown fuse LED. Fuse terminal blocks with blown fuse LED are polarity sensitive. The hinge side is positive.



**DN-F6 Series:**  
EURO S 10H/35



**DN-F6L Series:**  
EURO S 10H/35



**DN-F10 Series:**  
EURO S 4LH/35



**DN-F10L Series:**  
EURO S 4LH/35

## Ordering Information

	Part Number	Qty	Price	Part Number	Qty	Price	Part Number	Qty	Price	Part Number	Qty	Price
Gray Terminal Block	<b>DN-F6</b>	25	\$156.00	-			<b>DN-F10</b>	50	\$251.00	-		
	<b>DN-F6MN</b>	7	\$34.00				<b>DN-F10MN</b>	10	\$39.50			
12-24 VAC/DC*				<b>DN-F6L24</b>	10	\$89.00				<b>DN-F10L24</b>	10	\$87.00
110 VAC/DC*				<b>DN-F6L110</b>	10	\$89.00				<b>DN-F10L110</b>	10	\$87.00
220 VAC/DC*				<b>DN-F6L220</b>	10	\$89.00				<b>DN-F10L220</b>	10	\$87.00





## Technical Specifications

<b>Stripping Length</b>	12mm [0.47 in]			12mm [0.47 in]			10mm [0.39 in]			10mm [0.39 in]		
<b>Tightening Torque</b>	0.8 N·m [10 lb·in]			0.8 N·m [10 lb·in]			0.6 N·m [5.3 lb·in]			0.6 N·m [5.3 lb·in]		
<b>Density</b>	100/m [30 pcs/ft]			100/m [30 pcs/ft]			100/m [30 pcs/ft]			100/m [30 pcs/ft]		
<b>UL Approval**</b>	600V	30A	20-6 AWG	600V	30A	20-6 AWG	300V	15A	24-10 AWG	300V	15A	24-10 AWG
<b>CSA Approval</b>	600V	30A	18-6 AWG	600V	30A	18-6 AWG	300V	8A	18-12 AWG	300V	8A	18-12 AWG
<b>VDE Approval</b>	750V	8A	-	750V	8A	-	500V	8A	4mm <sup>2</sup>	500V	8A	4mm <sup>2</sup>
<b>Fuse Size (not supplied)</b>	1 1/4" x 1/4"			1 1/4" x 1/4"			5x20mm-5x25mm			5x20mm-5x25mm		
<b>Indicator Type</b>	Non-indicating			LED blown fuse indicator			Non-indicating			LED blown fuse indicator		
<b>Operating Temperature</b>	Ambient air temperature: -20 to 85°C [-4 to 185°F] / Relative humidity: 50% max at 40°C [104°F]; 90% max at 20°C [68°F]											
<b>SCCR Rating</b>	10kA per Table SB4.1, 2009, UL 508A, Maximum short circuit current rating for unmarked components											
<b>CE Conformity</b>	CE (EN 60947-1 / 60947-7-3)											
<b>Agency File #</b>	UL E179129 / LR84816											

## Accessories

End Covers		Included			Included			Included			Included		
35mm DIN Rail	7.5 mm high	<b>DN-R35S1</b>	10	\$56.00	<b>DN-R35S1</b>	10	\$56.00	<b>DN-R35S1</b>	10	\$56.00	<b>DN-R35S1</b>	10	\$56.00
		<b>DN-R35S1-2</b>	2	\$13.00	<b>DN-R35S1-2</b>	2	\$13.00	<b>DN-R35S1-2</b>	2	\$13.00	<b>DN-R35S1-2</b>	2	\$13.00
	15mm high	<b>DN-R35HS1</b>	10	\$93.00	<b>DN-R35HS1</b>	10	\$93.00	<b>DN-R35HS1</b>	10	\$93.00	<b>DN-R35HS1</b>	10	\$93.00
		<b>DN-R35HS1-2</b>	2	\$22.00	<b>DN-R35HS1-2</b>	2	\$22.00	<b>DN-R35HS1-2</b>	2	\$22.00	<b>DN-R35HS1-2</b>	2	\$22.00
End Brackets		<b>DN-EB35</b>	50	\$67.00	<b>DN-EB35</b>	50	\$67.00	<b>DN-EB35</b>	50	\$67.00	<b>DN-EB35</b>	50	\$67.00
		<b>DN-EB35MN</b>	20	\$31.50	<b>DN-EB35MN</b>	20	\$31.50	<b>DN-EB35MN</b>	20	\$31.50	<b>DN-EB35MN</b>	20	\$31.50
		<b>DN-EB35-A</b>	50	\$47.50	<b>DN-EB35-A</b>	50	\$47.50	<b>DN-EB35-A</b>	50	\$47.50	<b>DN-EB35-A</b>	50	\$47.50
		<b>DN-EB35-A-10</b>	10	\$12.00	<b>DN-EB35-A-10</b>	10	\$12.00	<b>DN-EB35-A-10</b>	10	\$12.00	<b>DN-EB35-A-10</b>	10	\$12.00
		<b>DN-QEB35</b>	50	\$42.50	<b>DN-QEB35</b>	50	\$42.50	<b>DN-QEB35</b>	50	\$42.50	<b>DN-QEB35</b>	50	\$42.50
		<b>DN-QEB35-10</b>	10	\$11.50	<b>DN-QEB35-10</b>	10	\$11.50	<b>DN-QEB35-10</b>	10	\$11.50	<b>DN-QEB35-10</b>	10	\$11.50
Angled Support Bracket	<b>DN-ASB1</b>	50	\$107.00										
Marking Tags	DN-L*** or DN-LT****	500/ 100	various										

\*Working voltage \*\*For copper wire only \*\*\*On lever arm \*\*\*\*On terminal body  
 Note: DN-F6 series fuse holders will accommodate the following AutomationDirect fuses: ABC, AGC, MDA and MDL Series.  
 DN-F10 series fuse holders will accommodate the following AutomationDirect fuses: GMA, GMC, S500, and S506 Series.  
 For more information on accessories, see the DINnectors Accessories section of this chapter.

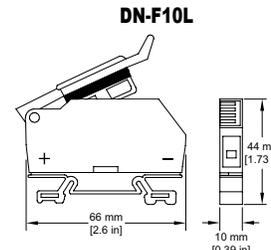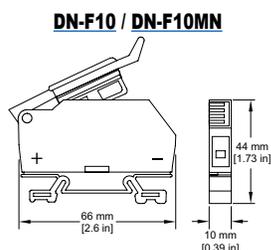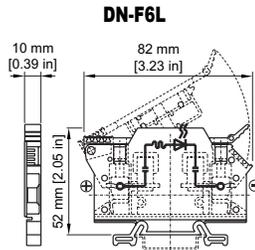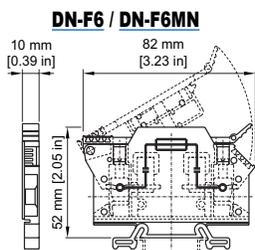

# Accessories



**FP-2**

Accessories			
Part Number	Description	Pcs/Pkg	Price
<b>FP-2</b>	Fuse puller for fuse dia. 13/32" - 13/16". Fuse type: 0-60A, 250V; 0-30A, 600V	1	\$33.00
<b>JV-L*</b> <i>(Not Field Installable)</i>	Multi-pole connection kit to connect new design multiple Class CC and Midget Class fuse holders together. Kit consists of 6 connectors and 3 handle pins to connect up to 4 fuse holders.		\$12.50


*Note: Will not work with retired design fuse holders shipped before November 1, 2009.*

*\*Roll pin punch or installation tool is required to install handle pins (Tool not sold by [AutomationDirect.com](http://AutomationDirect.com)).*



**JV-L**

Handle Pin Dimensions  
 Diameter = 0.0625 in [1.58 mm]  
 Length = 0.632 in [16.07 mm]

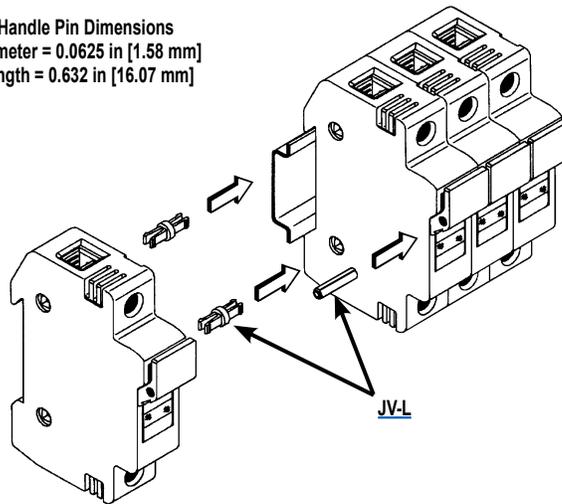

# Cross Reference Guide



## CROSS REFERENCE GUIDE By manufacturers type reference or series number. Ampere ratings must be added for ordering purposes.

FUSE TYPE		VOLT	EDISON	BRUSH/ DORMAN	BUSSMANN	MERSEN / GOULD	GEC/CEFCO	LITTELFUSE
<b>UL CLASS CURRENT LIMITING FUSES (CSA CLASS)</b>								
<b>CC (HRCI-CC)</b>	<i>Time-Delay</i>	600	EDCC	-	LP-CC	ATDR	-	CCMR
	<i>Time-Delay</i>	600	HCTR	-	FNQ-R	ATQR	-	KLDR
	<i>Fast-Acting</i>	600	HCLR	HCLR	KTK-R	ATMR	CTK-R	KLKR
<b>RK1</b>	<i>Time-Delay Dual Element</i>	250	LENRK	-	LPN-RK-SP	A2DR	-	LLNRK
		600	LESRK	-	LPS-RK-SP	A6DR	-	LLSRK
<b>RK5</b>	<i>Time-Delay Dual Element</i>	250	ECNR	-	FRN-R	TR	-	FLNR
		600	ECSR	-	FRS-R	TRS	-	FLSR
<b>J</b>	<i>Time-Delay Dual Element</i>	600	JDL	-	LPJ	AJT	-	JTD
	<i>High-Speed AC Drive</i>	600	JHL	-	DFJ	HSJ	-	-
<b>T</b>	<i>Extremely Fast-Acting</i>	300	TJN	-	JJN	A3T	-	JLLN
		600	TJS	-	JJS	A6T	-	JLLS
<b>UL CLASS GENERAL PURPOSE FUSES</b>								
<b>Midget</b>	<i>Fast-Acting</i>	600	MCL	MCL	KTK	ATM	CTK	KLK
		250	MOL	MOL	BAF/BAN	OTM	-	BLF
	<i>Time-Delay</i>	500	MEQ	MEQ	FNQ	ATQ	-	FLQ
		250	MEN	MEN	FNM	TRM	-	FLM
<b>1/4"x 1-1/4" Ceramic</b>	<i>Fast-Acting</i>	250/125	ABC	ABC	ABC	GAB	-	314
<b>1/4"x 1-1/4" Glass</b>		250/32	AGC	AGC	AGC	GGC	-	312
<b>1/4"x 1-1/4" Ceramic</b>	<i>Time-Delay</i>	250	MDA	MDA	MDA	-	-	326
<b>1/4"x 1-1/4" Glass</b>		250/32	MDL	MDL	MDL	GDL	-	313
<b>5x20 mm Glass</b>	<i>Fast-Acting</i>	250/125	GMA	GMA	GMA	GGM	-	235
	<i>Medium Time-Delay</i>	250/125	GMC	GMC	GMC	GSC	-	-
<b>5x20 mm Glass</b>	<i>Fast-Acting</i>	250	S500	BDB	GDB	GSB	-	217
	<i>Time-Delay</i>	250	S506	BDC	GDC	GDG	-	218
<b>Fuse Puller</b>								
<b>Fuse Puller FP-2</b>			old - 38072 new - FP-2	-	FP-2	-	-	-