

**PRODUCT SPECIFICATIONS**

WaterSentry<sup>®</sup> Lead + Microplastics NSF/ANSI Certified Filter (12-Pack) (Bottle Fillers). Overall dimensions are 3-1/8" x 3-1/8" x 9-1/2".

<b>Special Features:</b>	Filtered
<b>Dimensions:</b>	3-1/8" x 3-1/8" x 9-1/2"
<b>Shipping Weight:</b>	15 lbs.
<b>Flow Rate:</b>	1.5 GPM (5.6 L/m)
<b>Capacity:</b>	3000 gal. (11356 L)
<b>Temperature:</b>	40-100°F (4-38°C)
<b>Initial Pressure Drop:</b>	2-5 PSI (14-34 kPa)
<b>Maximum Pressure:</b>	105 PSI (724 kPa)
<b>Minimum Pressure:</b>	20 PSI (138 kPa)
<b>Water Inlet:</b>	3/8" (9.5mm) O.D. tube
<b>Water Outlet:</b>	1/4" (6.4mm) O.D. tube

**Special Note:** Replacement filter for use in ezH2O Bottle Filling Stations, Liv Pro Water Dispensers, and Universal EWF3000 WaterSentry systems.

- Multi-pack replacement filters for models with WaterSentry<sup>®</sup> filtration system (Bottle Fillers & Liv Pro).
- Filter should be replaced every 3,000 gallons (expires 1 year after installation).
- Equipped with quick-disconnect, 1/4-turn installation, as well as automatic inlet shut-off valve that closes when filter is removed.
- Designed to reduce lead, particles and chlorine. Also reduces odors and discoloration from incoming water.
- Filter is tested and certified to NSF 42 and 53 for lead, Class 1 particulate, chlorine taste and odor reduction.
- Filter is tested and certified to NSF/ANSI 401 for the reduction of microplastics.





**Included with Product:** 3000 gallon replacement filter cartridges (12 pack)

A Century of Tradition and Quality.  
For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.

**Product Compliance:** NSF 372 (lead free)  
NSF 42  
NSF 53  
NSF 401



[Installation Instructions \(PDF\) - 98526C](#)

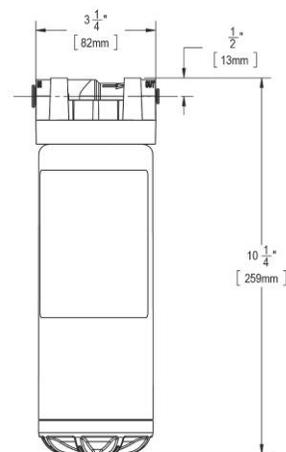

PART: \_\_\_\_\_ QTY: \_\_\_\_\_

PROJECT: \_\_\_\_\_

CONTACT: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_

APPROVAL: \_\_\_\_\_

*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](http://elkay.com) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*