



Industrial: Compression Style Pneumatic



Compression

*Thermoplastic /
Soft Metal Tubing
Economical
UL Listed*



Compress-Align®

*Pre-assembled
Captive Sleeve
Two piece*



Metru-Lok™

*NPT, BSPT, BSPP,
Metric Threads
Captive Sleeve
Metric Tubing*



Poly-Tite

*Built-in Tube Support
Captive Sleeve
Knurled Nut*



Hi-Duty

*Higher Pressure Rating
Two Piece Design
Easy Assembly*



<p>Tube to Male NPT</p>  <p>p. G7</p>	<p>168C Gauge Tee</p>  <p>p. G8</p>	<p>169C-269C Male Elbow</p>  <p>p. G8</p>	<p>171C Male Run Tee</p>  <p>p. G9</p>	<p>172C Male Branch Tee</p>  <p>p. G9</p>	<p>176C Adaptor</p>  <p>p. G9</p>	
	<p>179C 45° Male Elbow</p>  <p>p. G9</p>	<p>682C Tank Fitting</p>  <p>p. G9</p>	<p>68CA Male Connector</p>  <p>p. G12</p>	<p>168CA Gauge Tee</p>  <p>p. G13</p>	<p>169CA-269CA Male Elbow</p>  <p>p. G13</p>	<p>171CA Male Run Tee</p>  <p>p. G13</p>
<p>176CA Adaptor</p>  <p>p. G14</p>	<p>179CA 45° Male Elbow</p>  <p>p. G14</p>	<p>682CA Tank Fitting</p>  <p>p. G14</p>	<p>68P Male Connector</p>  <p>p. G26</p>	<p>169P-269P Male Elbow</p>  <p>p. G28</p>	<p>169LP Long Elbow</p>  <p>p. G28</p>	<p>169PS Male Elbow Swivel</p>  <p>p. G28</p>
<p>171P Male Run Tee</p>  <p>p. G29</p>	<p>172P Male Branch Tee</p>  <p>p. G29</p>	<p>NV311P Needle Valve</p>  <p>p. G29</p>	<p>NV312P Needle Valve</p>  <p>p. G29</p>	<p>68HD Male Connector</p>  <p>p. G32</p>	<p>169HD Male Elbow</p>  <p>p. G32</p>	<p>171HD Male Run Tee</p>  <p>p. G32</p>
<p>172HD Male Branch Tee</p>  <p>p. G32</p>	<p>179HD 45° Male Elbow</p>  <p>p. G32</p>	<p>Tube to Female NPT</p>	<p>66C Female Connector</p>  <p>p. G7</p>	<p>170C-270C Female Elbow</p>  <p>p. G9</p>	<p>177C Female Branch Tee</p>  <p>p. G9</p>	<p>66CA Female Connector</p>  <p>p. G12</p>
<p>170CA-270CA Female Elbow</p>  <p>p. G13</p>	<p>177CA Female Branch Tee</p>  <p>p. G14</p>		<p>66P Female Connector</p>  <p>p. G25</p>	<p>170P Female Elbow</p>  <p>p. G29</p>	<p>177P Female Branch Tee</p>  <p>p. G29</p>	<p>66HD Female Connector</p>  <p>p. G31</p>
<p>177HD Female Branch Tee</p>  <p>p. G33</p>	<p>Tube to Tube</p>	<p>62C Union</p>  <p>p. G6</p>	<p>164C-264C Union Tee</p>  <p>p. G8</p>	<p>165C-265C Union Elbow</p>  <p>p. G8</p>	<p>62CA Union</p>  <p>p. G11</p>	<p>62PCA Union</p>  <p>p. G11</p>
<p>164CA-264CA Union Tee</p>  <p>p. G12</p>		<p>165CA-265CA Union Elbow</p>  <p>p. G12</p>	<p>62P Union</p>  <p>p. G24</p>	<p>62PCA Union</p>  <p>p. G25</p>	<p>97P Tube Reducer</p>  <p>p. G26</p>	<p>164P Union Tee</p>  <p>p. G28</p>

G

<p>164HD Union Tee</p>  <p>p. G31</p>	<p>165HD Union Elbow</p>  <p>p. G31</p>	<p>Bulkhead Union</p>		<p>62CBH Bulkhead Union</p>  <p>p. G7</p>	<p>62CABH Bulkhead Union</p>  <p>p. G11</p>	<p>62PCABH Bulkhead Union</p>  <p>p. G11</p>	<p>62PBH Bulkhead Union</p>  <p>p. G25</p>
<p>62PCABH Bulkhead Union</p>  <p>p. G25</p>	<p>62PTBH Bulkhead Union</p>  <p>p. G25</p>	<p>62HDBH Bulkhead Union</p>  <p>p. G31</p>	<p>Couplers</p>		<p>391P Coupler Body</p>  <p>p. G26</p>	<p>391PSS Coupler Body</p>  <p>p. G26</p>	<p>392P Bulkhead Body</p>  <p>p. G26</p>
<p>392PSS Bulkhead Body</p>  <p>p. G26</p>	<p>393P Through Insert</p>  <p>p. G26</p>	<p>393PSS Through Insert</p>  <p>p. G26</p>	<p>393PD Shutoff Insert</p>  <p>p. G27</p>	<p>393PDSS Shutoff Insert</p>  <p>p. G27</p>	<p>394P Single Shutoff</p>  <p>p. G27</p>	<p>394PSS Single Shutoff</p>  <p>p. G27</p>	
<p>394PD Double Shutoff</p>  <p>p. G27</p>	<p>394PDSS Double Shutoff</p>  <p>p. G27</p>	<p>398P Single Shutoff</p>  <p>p. G27</p>	<p>398PSS Single Shutoff</p>  <p>p. G27</p>	<p>398PD Double Shutoff</p>  <p>p. G28</p>	<p>398PDSS Double Shutoff</p>  <p>p. G28</p>		
<p>Auxiliary Component</p>		<p>60C Sleeve</p>  <p>p. G6</p>	<p>60PT Plastic Sleeve</p>  <p>p. G8 & G24</p>	<p>61C Nut</p>  <p>p. G6</p>	<p>61CL Long Nut</p>  <p>p. G6</p>	<p>63PT Tube Support</p>  <p>p. G7, G11, G25</p>	<p>639C Seal Plug</p>  <p>p. G9</p>
<p>59CA Plug</p>  <p>p. G11</p>	<p>61CA Nut/Sleeve</p>  <p>p. G11</p>	<p>639CA Seal Plug</p>  <p>p. G14</p>	<p>56PSG Spring guard</p>  <p>p. G24</p>	<p>59P Plug</p>  <p>p. G24</p>	<p>60P Plastic Sleeve</p>  <p>p. G24</p>	<p>60PB Brass Sleeve</p>  <p>p. G24</p>	
<p>61P Nut/Plastic Sleeve</p>  <p>p. G24</p>	<p>61PB Nut/Brass Sleeve</p>  <p>p. G24</p>	<p>61PN Nut Only</p>  <p>p. G24</p>	<p>61PSGN Spring Guard Nut</p>  <p>p. G24</p>	<p>61HD Nut</p>  <p>p. G31</p>	<p>59HD Plug</p>  <p>p. G33</p>	<p>Metric Tube to NPT</p>	
<p>FBMB Male Connector</p>  <p>p. G16</p>	<p>CBMB Male Elbow</p>  <p>p. G17</p>	<p>RBMB Male Run Tee</p>  <p>p. G18</p>	<p>SBMB Male Branch Tee</p>  <p>p. G19</p>	<p>T2HFB Male Standpipe</p>  <p>p. G20</p>	<p>Metric Tube to Female NPT</p>		<p>GBMB Female Connector</p>  <p>p. G17</p>



Metric Tube to BSPT	F3BMB Male Connector  p. G16	C3BMB Male Elbow  p. G18	R3BMB Male Run Tee  p. G19	S3BMB Male Branch Tee  p. G19	T23HFB Male Standpipe  p. G20	
	F4BMB Male Connector  p. G16	G4BMB Female Connector  p. G17	Metric Tube to Metric Straight Thread	F8BMB Male Connector  p. G16	C8BMB Male Elbow  p. G18	T28HFB Male Standpipe  p. G20
Metric Tube to Female NPT	T2HGB Female Standpipe  p. G20	Metric Tube to Female BSPP		T24HGB Female Standpipe  p. G21	Metric Tube to Metric Tube	HBMB Union  p. G16
JBMB Union Tee  p. G18	Metric Bulkhead Union	WBMB Bulkhead Union  p. G17	WBMPB Bulkhead Union  p. G17	Metric Banjo		COR4BMB Banjo  p. G19
Metric Auxiliary Component		BMB Nut  p. G21	BTMB Nut/Sleeve  p. G21		FNMB Cap  p. G21	PNMB Plug  p. G21
	T23UB Tube Support  p. G22					





Compression Fittings

MATERIALS OF CONSTRUCTION	
FITTINGS:	BRASS
NUTS:	BRASS
SLEEVES:	BRASS OR ACETAL

NOMENCLATURE	
EXAMPLE: 169C-6-4	ATTRIBUTE:
1	FORGING
2 (NOT SHOWN)	EXTRUSION (2)
69	MALE ELBOW
C	COMPRESSION
6	3/8 TUBE O.D.
4	1/4 PIPE THREAD

PRESSURE RANGE @73°F		
PSI	TUBE O.D. (IN.)	TUBE WALL (IN.)
400	1/8	.030
400	9/16	.030
300	1/4	.030
300	5/16	.032
200	3/8	.032
200	1/2	.032
150	5/8	.035
100	3/4	.035
75	7/8	.035

1. PRESSURE RATING IS BASED ON USE WITH SOFT METAL TUBING @ 73° F.
2. THERMOPLASTIC TUBES USING ACETAL SLEEVE 60PT AND BRASS INSERT 63PT HAVE PRESSURE RANGES UP TO THE TUBE'S RATED WORKING PRESSURE.

APPLICABLE TUBE	
TUBE MATERIAL:	COPPER, ALUMINUM, THERMOPLASTIC TUBING
TUBE O.D.:	1/8, 3/16, 1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 7/8

SPECIFICATIONS	
OPERATING FLUID:	WATER, AIR, INERT AND NON-COMBUSTIBLE GASSES COMPATIBLE WITH MATERIALS OF CONSTRUCTION
TEMPERATURE RANGES:	FROM -65° TO +250°F.
NOTE:	FOR OTHER TYPES OF FLUIDS OR GASSES, PLEASE CONSULT FACTORY



No flaring, soldering or other preparation of tubing necessary to assemble. Listed with Underwriter's Laboratories for flammable liquid. Compression fittings meet functional requirements of SAE J-512.

Assembly Instructions


1. Slide nut, then sleeve onto tubing. The thread end of the nut must face out.
2. Insert the tube into the fitting. Be sure the tube is bottomed on the fitting shoulder.
3. Assemble nut to body, and tighten "hand-tight". Then follow the number of wrench turns as indicated in the following table.

FITTING SIZE	TUBE SIZE	TURNS REQUIRED TO SEAL FROM HAND-TIGHT	
		60C WITH SOFT METAL TUBING	60PT WITH THERMOPLASTIC TUBING
2	1/8	1-1/4	—
3	3/16	1-1/4	—
4	1/4	1-1/4	2
5	5/16	1-1/4	2
6	3/8	2-1/4	2
8	1/2	2-1/4	2
10	5/8	2-1/4	2
12	3/4	2-1/4	2
14	7/8	2-1/4	—



Sleeve 60C


REF. SAE 060115



PART NO.	TUBE SIZE	A	D	L
60C-2	1/8	.187	.130	.19
60C-3	3/16	.266	.192	.22
60C-4	1/4	.344	.255	.25
60C-5	5/16	.406	.318	.25
60C-6	3/8	.469	.382	.25
60C-7	7/16	.531	.444	.31
60C-8	1/2	.594	.507	.38
60C-10	5/8	.719	.632	.38
60C-12	3/4	.875	.758	.44
60C-14	7/8	1.000	.883	.41

Long Nut 61CL

REF. SAE 060111

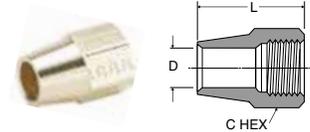

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
61CL-4	1/4	7/16-24	1/2	.255	.75
61CL-5	5/16	1/2-24	9/16	.318	.84
61CL-6	3/8	9/16-24	5/8	.382	.97
61CL-8	1/2	11/16-20	13/16	.507	1.06
61CL-10	5/8	13/16-18	15/16	.632	1.19
61CL-12	3/4	1-18	1-3/16	.758	1.38


Acetal Sleeve 60PT



PART NO.	PLASTIC TUBE WALL	TUBE WALL	A	D	L
60PT-4	1/4	.040	.375	.254	.19
60PT-5	5/16	.062	.438	.317	.19
60PT-6	3/8	.062	.500	.379	.19
60PT-8	1/2	.062	.631	.507	.25
60PT-10	5/8	.062	.747	.632	.22

Union 62C


REF. SAE 060101 BA

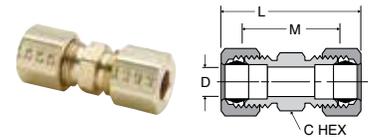

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62C-2	1/8	5/16-24	5/16	1.05	.64	.094
62C-3	3/16	3/8-24	3/8	1.21	.72	.125
62C-4	1/4	7/16-24	7/16	1.33	.79	.188
62C-5	5/16	1/2-24	1/2	1.39	.85	.250
62C-6	3/8	9/16-24	9/16	1.52	.97	.312
62C-7	7/16	5/8-24	5/8	1.70	1.02	.312
62C-8	1/2	11/16-20	11/16	1.90	1.08	.406
62C-10	5/8	13/16-18	13/16	2.06	1.23	.500
62C-12	3/4	1-18	1	2.37	1.41	.562
62C-14	7/8	1-1/8-18	1-1/8	2.07	1.19	.766

Nut 61C


REF. SAE 060110



PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
61C-2	1/8	5/16-24	3/8	.130	.38
61C-3	3/16	3/8-24	7/16	.192	.41
61C-4	1/4	7/16-24	1/2	.255	.44
61C-5	5/16	1/2-24	9/16	.318	.44
61C-6	3/8	9/16-24	5/8	.382	.47
61C-7	7/16	5/8-24	11/16	.444	.50
61C-8	1/2	11/16-20	13/16	.507	.62
61C-10	5/8	13/16-18	15/16	.632	.62
61C-12	3/4	1-18	1-3/16	.758	.69
61C-14	7/8	1-1/8-18	1-1/4	.890	.62


Union Reducers 62C

REF. SAE 060101 BA

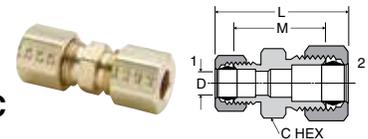


PART NO.	1 TUBE SIZE	2 TUBE SIZE	1 STRAIGHT THREAD	2 STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62C-4-3	3/16	1/4	3/8-24	7/16-24	7/16	1.29	.78	.125
62C-6-4	1/4	3/8	7/16-24	9/16-24	9/16	1.46	.91	.188
62C-8-6	3/8	1/2	9/16-24	11/16-20	11/16	1.71	1.03	.312
62C-10-6	3/8	5/8	9/16-24	13/16-18	13/16	1.82	1.13	.312

Bulkhead Union 62CBH

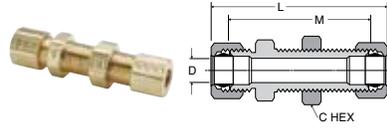

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	M	BULKHEAD HOLE DIA.	FLOW DIA. D
62CBH-4	1/4	7/16-24	9/16	2.29	1.75	7/16	.188
62CBH-6	3/8	9/16-24	11/16	2.42	1.88	9/16	.312


Male Connector 68C

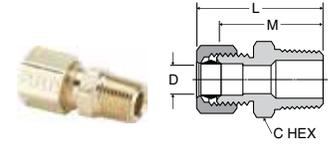

REF. SAE 060102 BA


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
68C-2-1	1/8	1/16	5/16-24	3/8	.99	.78	.095
68C-2-2	1/8	1/8	5/16-24	7/16	.97	.77	.094
68C-3-1	3/16	1/16	3/8-24	3/8	1.08	.84	.125
68C-3-2	3/16	1/8	3/8-24	7/16	1.08	.84	.125
68C-3-4	3/16	1/4	3/8-24	9/16	1.27	1.03	.125
68C-4-2	1/4	1/8	7/16-24	7/16	1.10	.86	.188
68C-4-4	1/4	1/4	7/16-24	9/16	1.30	1.06	.188
68C-4-6	1/4	3/8	7/16-24	11/16	1.27	1.03	.188
68C-4-8	1/4	1/2	7/16-24	7/8	1.55	1.31	.188
68C-5-2	5/16	1/8	1/2-24	1/2	1.15	.89	.234
68C-5-4	5/16	1/4	1/2-24	9/16	1.33	1.07	.250
68C-6-2	3/8	1/8	9/16-24	9/16	1.25	.97	.250
68C-6-4	3/8	1/4	9/16-24	9/16	1.42	1.14	.312
68C-6-6	3/8	3/8	9/16-24	11/16	1.44	1.16	.312
68C-6-8	3/8	1/2	9/16-24	7/8	1.53	1.25	.312
68C-7-4	7/16	1/4	5/8-24	5/8	1.50	1.17	.312
68C-8-4	1/2	1/4	11/16-20	11/16	1.60	1.20	.312
68C-8-6	1/2	3/8	11/16-20	11/16	1.60	1.20	.406
68C-8-8	1/2	1/2	11/16-20	7/8	1.71	1.31	.406
68C-10-6	5/8	3/8	13/16-18	13/16	1.73	1.31	.406
68C-10-8	5/8	1/2	13/16-18	7/8	1.90	1.48	.500
68C-10-12	5/8	3/4	13/16-18	1-1/16	1.98	1.56	.500
68C-12-8	3/4	1/2	1-18	1	2.05	1.60	.562
68C-12-12	3/4	3/4	1-18	1-1/16	2.08	1.63	.656
68C-14-12	7/8	3/4	1-1/8-18	1-1/8	1.76	1.41	.750

Brass Insert 63PT

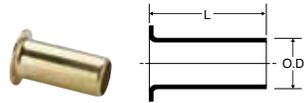

PART NO.	TUBE O. D.	TUBE WALL	L	O. D.
63PT-2-16	1/8	.016	.46	.080
63PT-2-23	1/8	.023	.45	.073
63PT-2-32	1/8	.032	.31	.061
63PT-3-25	3/16	.025	.45	.135
63PT-3-40	3/16	.040	.52	.095
63PT-4-40	1/4	.040	.50	.163
63PT-4-62	1/4	.062	.33	.110
63PT-5-40	5/16	.040	.50	.232
63PT-5-62	5/16	.062	.53	.187
63PT-6-62	3/8	.062	.56	.250
63PT-8-62	1/2	.062	.72	.370
63PT-10-62	5/8	.062	.72	.483

Female Connector 66C

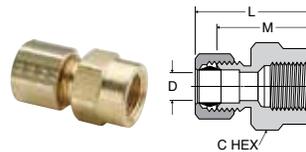


REF. SAE 060103 BA

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
66C-2-2	1/8	1/8	5/16-24	9/16	.95	.75	.094
66C-3-2	3/16	1/8	3/8-24	9/16	1.02	.78	.125
66C-3-4	3/16	1/4	3/8-24	11/16	1.20	.96	.125
66C-4-2	1/4	1/8	7/16-24	9/16	1.02	.78	.188
66C-4-4	1/4	1/4	7/16-24	11/16	1.24	1.00	.188
66C-5-2	5/16	1/8	1/2-24	9/16	1.07	.81	.250
66C-5-4	5/16	1/4	1/2-24	11/16	1.29	1.03	.250
66C-6-2	3/8	1/8	9/16-24	9/16	1.06	.78	.312
66C-6-4	3/8	1/4	9/16-24	11/16	1.34	1.06	.312
66C-6-6	3/8	3/8	9/16-24	13/16	1.34	1.06	.312
66C-6-8	3/8	1/2	9/16-24	1	1.54	1.27	.312
66C-7-6	7/16	3/8	5/8-24	13/16	1.43	1.09	.312
66C-8-4	1/2	1/4	11/16-20	11/16	1.49	1.09	.406
66C-8-6	1/2	3/8	11/16-20	13/16	1.52	1.12	.406
66C-8-8	1/2	1/2	11/16-20	1	1.71	1.31	.406
66C-10-8	5/8	1/2	13/16-18	1	1.80	1.38	.500



**Union Tee
164C-264C**


REF. SAE 060401 BA

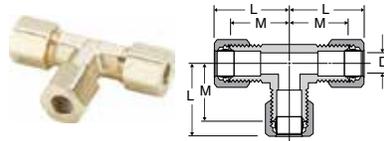

PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	FLOW DIA. D
164C-2	1/8	5/16-24	.82	.61	.094
264C-3	3/16	3/8-24	.84	.60	.125
164C-4	1/4	7/16-24	.86	.63	.188
264C-4	1/4	7/16-24	.84	.60	.188
164C-5	5/16	1/2-24	.98	.71	.250
164C-6	3/8	9/16-24	1.03	.74	.312
164C-8	1/2	11/16-20	1.34	.93	.406
164C-10	5/8	13/16-18	1.54	1.08	.500
164C-12	3/4	1.00-18	1.65	1.17	.563


Compression Gage Tee 168C

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	N1	FLOW DIA. D
168C-4-2	1/4	1/8	7/16-24	.96	.72	1.41	.56	.188

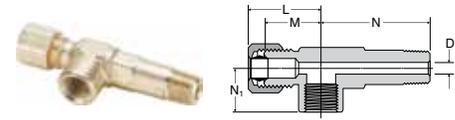

**Union Tee 164C-264C
Combination Sizes**


REF. SAE 060401 BA

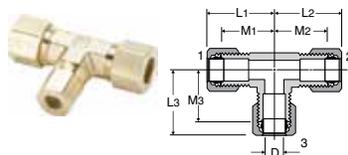

PART NO.	1 TUBE SIZE	2 TUBE SIZE	3 TUBE SIZE	L1	L2	L3	M1	M2	M3	FLOW DIA. D
164C-6-4-4	3/8	1/4	1/4	1.03	.96	.96	.75	.72	.72	.188
164C-6-6-4	3/8	3/8	1/4	1.03	.96	.96	.75	.75	.72	.188
164C-8-8-6	1/2	1/2	3/8	1.34	1.16	1.16	.94	.94	.88	.312

**Union Elbow
165C-265C**


REF. SAE 060201 BA

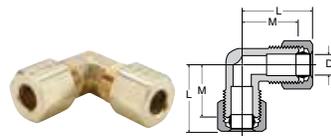

PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	FLOW DIA. D
165C-2	1/8	5/16-24	.82	.61	.094
165C-3	3/16	3/8-24	.87	.61	.125
165C-4	1/4	7/16-24	.88	.61	.188
265C-4	1/4	7/16-24	.84	.60	.188
165C-5	5/16	1/2-24	.95	.71	.250
165C-6	3/8	9/16-24	1.03	.74	.312
165C-7	7/16	5/3-24	1.16	.82	.312
165C-8	1/2	11/16-20	1.34	.93	.406
165C-10	5/8	13/16-18	1.48	1.05	.500
165C-12	3/4	1-18	1.65	1.17	.563

Male Elbow 169C-269C

REF. SAE 060202 BA

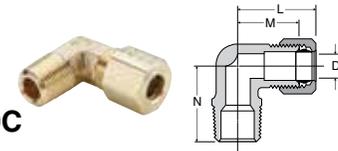


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
169C-2-1	1/8	1/16	5/16-24	.81	.60	.67	.095
269C-2-2	1/8	1/8	5/16-24	.80	.60	.67	.094
169C-3-1	3/16	1/16	3/8-24	.85	.61	.67	.126
169C-3-2	3/16	1/8	3/8-24	.84	.61	.69	.125
269C-3-2	3/16	1/8	3/8-24	.84	.60	.67	.125
169C-3-4	3/16	1/4	3/8-24	.86	.64	.93	.125
169C-4-2	1/4	1/8	7/16-24	.86	.61	.74	.188
269C-4-2	1/4	1/8	7/16-24	.84	.60	.73	.188
169C-4-4	1/4	1/4	7/16-24	.86	.62	.94	.188
269C-4-4	1/4	1/4	7/16-24	.84	.60	.79	.188
169C-4-6	1/4	3/8	7/16-24	.93	.68	1.00	.188
169C-5-2*	5/16	1/8	1/2-24	.88	.61	.74	.234
269C-5-2*	5/16	1/8	1/2-24	.86	.60	.73	.250
169C-5-4	5/16	1/4	1/2-24	.95	.71	.93	.250
269C-5-4	5/16	1/4	1/2-24	.93	.67	.82	.250
169C-5-6	5/16	3/8	1/2-24	1.01	.75	1.00	.250
169C-6-2*	3/8	1/8	9/16-24	1.03	.74	.74	.234
269C-6-2*	3/8	1/8	9/16-24	.97	.69	.75	.220
169C-6-4	3/8	1/4	9/16-24	1.03	.74	.93	.312
269C-6-4	3/8	1/4	9/16-24	1.01	.73	.92	.312
169C-6-6	3/8	3/8	9/16-24	1.03	.75	1.00	.312
269C-6-6	3/8	3/8	9/16-24	1.12	.84	.97	.312
169C-6-8	3/8	1/2	9/16-24	1.22	.94	1.27	.312
269C-7-6	7/16	3/8	5/8-24	1.16	.82	.98	.312
169C-8-4*	1/2	1/4	11/16-20	1.34	.94	1.00	.312
169C-8-6	1/2	3/8	11/16-20	1.34	.93	1.11	.406
169C-8-8	1/2	1/2	11/16-20	1.48	1.00	1.37	.406
169C-10-8	5/8	1/2	13/16-18	1.48	1.06	1.31	.500
169C-12-8	3/4	1/2	1-18	1.64	1.18	1.49	.562
169C-12-12	3/4	3/4	1-18	1.70	1.27	1.58	.562

* For these parts the pipe thread through hole is smaller than the through hole on the flare end.




Female Elbow 170C-270C

REF. SAE 060203 BA

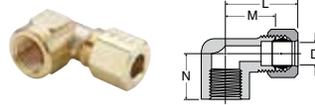


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
170C-2-2	1/8	1/8	5/16-24	.89	.69	.56	.094
170C-3-2	3/16	1/8	3/8-24	.98	.69	.56	.125
170C-4-2	1/4	1/8	7/16-24	.93	.69	.56	.188
270C-4-2	1/4	1/8	7/16-24	.91	.67	.54	.188
170C-4-4	1/4	1/4	7/16-24	1.02	.78	.67	.188
170C-6-4	3/8	1/4	9/16-24	1.06	.79	.73	.312
170C-6-6	3/8	3/8	9/16-24	1.22	.89	.69	.312
170C-7-4	7/16	1/4	5/8-24	1.27	.93	.73	.312
170C-8-6	1/2	3/8	11/16-20	1.34	1.00	.69	.406
170C-8-8	1/2	1/2	11/16-20	1.56	1.15	.97	.408
170C-12-12	3/4	3/4	1-18	2.06	1.58	1.58	.563

Adapter Tee 176C

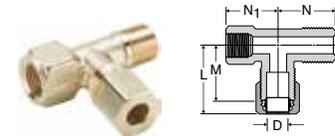

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	N1	FLOW DIA. D
176C-4-2	1/4	1/8	7/16-24	.93	.69	.75	.66	.188


Female Branch Tee 177C

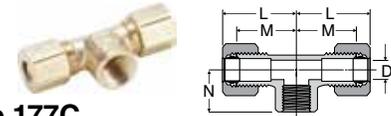

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
177C-4-2	1/4	1/8	7/16-24	.86	.63	.53	.188

45° Elbow 179C


Compression to male pipe

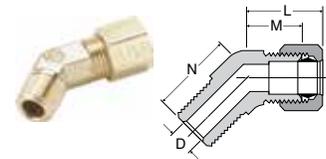

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
179C-4-2	1/4	1/8	7/16-24	.90	.66	.56	.188
179C-4-4	1/4	1/4	7/16-24	.80	.56	.84	.188
179C-6-2	3/8	1/8	9/16-24	.90	.63	.65	.234
179C-6-4	3/8	1/4	9/16-24	.90	.63	.84	.312
179C-6-6	3/8	3/8	9/16-24	.97	.75	.95	.312
179C-8-6	1/2	3/8	11/16-24	1.15	.81	.95	.406


Male Run Tee 171C

REF. SAE 060424 BA

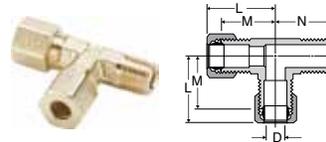

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
171C-2-2	1/8	1/8	5/16-24	.82	.61	.67	.094
171C-3-2	3/16	1/8	3/8-24	.86	.61	.67	.125
171C-4-2	1/4	1/8	7/16-24	.90	.64	.75	.188
171C-4-4	1/4	1/4	7/16-24	.93	.69	.92	.188
171C-6-4	3/8	1/4	9/16-24	1.09	.81	1.03	.312


Seal Plug 639C



PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	M
639C-4	1/4	7/16-24	7/16	.74	.50


Male Branch Tee 172C

REF. SAE 060425 BA

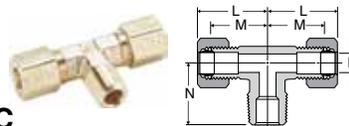

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
172C-2-2	1/8	1/8	5/16-24	.82	.61	.67	.094
172C-3-2	3/16	1/8	3/8-24	.86	.61	.67	.125
172C-4-2	1/4	1/8	7/16-24	.86	.61	.74	.188
172C-4-4	1/4	1/4	7/16-24	.93	.69	.92	.188
172C-6-2	3/8	1/8	9/16-24	1.03	.75	.75	.234
172C-6-4	3/8	1/4	9/16-24	1.09	.77	.92	.312
172C-6-6	3/8	3/8	9/16-24	1.09	.81	1.00	.312
172C-8-6	1/2	3/8	11/16-20	1.34	.93	1.10	.406

Straight Through Tank Fitting 682C

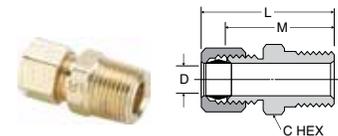

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
682C-3-2	3/16	1/8	3/8-24	7/16	1.06	0.84	.195
682C-6-6	3/8	3/8	9/16-24	11/16	1.44	1.16	.387
682C-8-8	1/2	1/2	11/16-20	7/8	1.90	1.31	.516



Compress-Align® Fittings

MATERIALS OF CONSTRUCTION	
FITTINGS:	BRASS
NUTS:	BRASS

NOMENCLATURE	
EXAMPLE: 269CA-6-4	ATTRIBUTE:
1 (NOT SHOWN)	FORGING (1)
2	EXTRUSION
69	MALE ELBOW
CA	COMPRESS-ALIGN
6	3/8 TUBE O.D.
4	1/4 PIPE THREAD

PRESSURE RANGE		
PSI	TUBE O.D. (IN.)	TUBE WALL (IN.)
2800	1/8	.030
1900	3/16	.030
1400	1/4	.030
1200	5/16	.032
1000	3/8	.032
750	1/2	.032
650	5/8	.035
550	3/4	.035
450	7/8	.035
350	1	.035

- PRESSURE RATING IS BASED ON USE WITH SOFT METAL TUBING @ 73° F.
- THERMOPLASTIC TUBES USING BRASS INSERT 63PT HAVE PRESSURE RANGES UP TO THE TUBE'S RATED WORKING PRESSURE.



No flaring, soldering or other preparation of tubing is necessary. Preassembled fitting, with captive sleeve. Sleeve is always oriented for correct installation, visible for inspection before and after installation.


Assembly Instructions

With nut finger tight on fitting body, insert tubing until it bottoms in the fitting. Complete the seal with one wrench turn on all sizes.

APPLICABLE TUBE	
TUBE MATERIAL:	COPPER, ALUMINUM, TFE, FEA, PFA, THERMOPLASTIC TUBING
TUBE O.D.:	1/8, 3/16, 1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 1


SPECIFICATIONS	
OPERATING FLUID:	WATER, AIR, INERT AND NON-COMBUSTIBLE GASSES COMPATIBLE WITH MATERIALS OF CONSTRUCTION
TEMPERATURE RANGES:	FROM -65° TO +250°F.
NOTE:	FOR OTHER TYPES OF FLUIDS OR GASSES, PLEASE CONSULT FACTORY






Plug 59CA

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L
59CA-4	1/4	7/16-24	1/2	.40
59CA-6	3/8	9/16-24	5/8	.45
59CA-8	1/2	11/16-20	13/16	.50

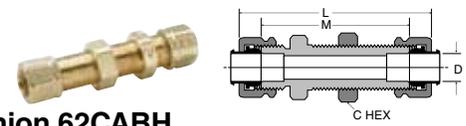


Bulkhead Union 62CABH

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	M	BULKHEAD HOLE DIA.	FLOW DIA. D
62CABH-4	1/4	7/16-24	9/16	2.22	1.75	7/16	.188
62CABH-6	3/8	9/16-24	11/16	2.32	1.88	9/16	.312



Nut and Sleeve Assembly 61CA


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
61CA-2	1/8	5/16-24	3/8	.130	.36
61CA-3	3/16	3/8-24	7/16	.194	.38
61CA-4	1/4	7/16-24	1/2	.255	.40
61CA-5	5/16	1/2-24	9/16	.318	.45
61CA-6	3/8	9/16-24	5/8	.382	.45
61CA-8	1/2	11/16-20	13/16	.507	.50
61CA-10	5/8	13/16-18	15/16	.632	.53
61CA-12	3/4	1-18	1-3/16	.760	.56
61CA-14	7/8	1-1/8-18	1-3/8	.885	.68
61CA-16	1	1-1/4-18	1-1/2	1.012	.63

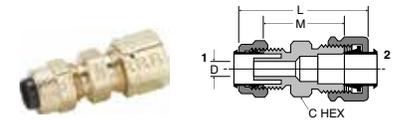

Union 62PCA

(Poly-Tite to Compress-Align)


PART NO.	TUBE SIZE	1 STRAIGHT THREAD	2 STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62PCA-4	1/4	3/8-24	7/16-24	7/16	1.24	.89	.125
62PCA-5	5/16	7/16-24	1/2-24	1/2	1.26	.92	.144
62PCA-6	3/8	1/2-24	9/16-24	9/16	1.32	.98	.204

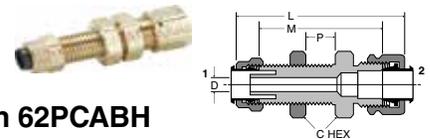

Bulkhead Union 62PCABH


(Poly-Tite to Compress-Align)

PART NO.	TUBE SIZE	1 STR THD	2 STR THD	C HEX	P MAX	L	M	FLOW BKHD DIA.	FLOW DIA. D
62PCABH-4	1/4	3/8-24	7/16-24	9/16	.38	1.80	1.45	3/8	.125
62PCABH-6	3/8	1/2-24	9/16-24	11/16	.47	1.98	1.64	1/2	.204

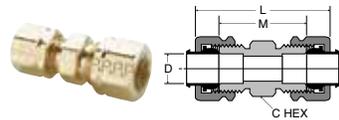

Union 62CA

PART NO.	SIZE	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62CA-2	1/8	5/16-24	5/16	1.12	.64	.094
62CA-3	3/16	3/8-24	3/8	1.19	.72	.125
62CA-4	1/4	7/16-24	7/16	1.26	.79	.188
62CA-5	5/16	1/2-24	1/2	1.32	.85	.250
62CA-6	3/8	9/16-24	9/16	1.42	.97	.312
62CA-8	1/2	11/16-20	11/16	1.53	1.08	.406
62CA-10	5/8	13/16-18	13/16	1.71	1.23	.500
62CA-12	3/4	1-18	1	2.20	1.41	.562
62CA-14	7/8	1-1/8-18	1-1/8	2.08	1.19	.766

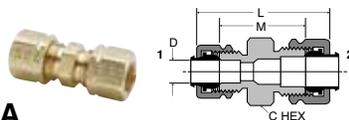


Union Reducers 62CA

PART NO.	1 TUBE SIZE	2 TUBE SIZE	1 STRAIGHT THREAD	2 STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62CA-4-3	3/16	1/4	3/8-24	7/16-24	7/16	1.25	.78	.125
62CA-6-4	1/4	3/8	7/16-24	9/16-24	9/16	1.37	.91	.188
62CA-8-6	3/8	1/2	9/16-24	11/16-20	11/16	1.48	1.03	.312
62CA-10-6	3/8	5/8	9/16-24	13/16-18	13/16	1.59	1.13	.312




Brass Insert 63PT

PART NO.	TUBE SIZE	TUBE WALL	L	O.D.
63PT-2-16	1/8	.016	.46	.080
63PT-2-23	1/8	.023	.45	.073
63PT-2-32	1/8	.032	.31	.061
63PT-3-25	3/16	.025	.45	.135
63PT-3-40	3/16	.040	.52	.095
63PT-4-40	1/4	.040	.50	.163
63PT-4-62	1/4	.062	.33	.110
63PT-5-40	5/16	.040	.50	.232
63PT-5-62	5/16	.062	.53	.187
63PT-6-62	3/8	.062	.56	.250
63PT-8-62	1/2	.062	.72	.370
63PT-10-62	5/8	.062	.72	.483

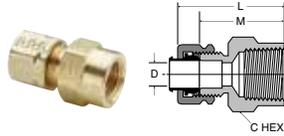


Female Connector 66CA

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
66CA-2-2	1/8	1/8	5/16-24	9/16	.99	.75	.094
66CA-3-2	3/16	1/8	3/8-24	9/16	1.01	.78	.125
66CA-3-4	3/16	1/4	3/8-24	11/16	1.19	.96	.125
66CA-4-2	1/4	1/8	7/16-24	9/16	1.02	.78	.188
66CA-4-4	1/4	1/4	7/16-24	11/16	1.24	1.00	.188
66CA-5-2	5/16	1/8	1/2-24	9/16	1.05	.81	.250
66CA-5-4	5/16	1/4	1/2-24	11/16	1.27	1.03	.250
66CA-6-2	3/8	1/8	9/16-24	9/16	1.00	.78	.312
66CA-6-4	3/8	1/4	9/16-24	11/16	1.28	1.06	.312
66CA-6-6	3/8	3/8	9/16-24	13/16	1.29	1.06	.312
66CA-6-8	3/8	1/2	9/16-24	1	1.49	1.27	.312
66CA-8-4	1/2	1/4	11/16-20	11/16	1.32	1.09	.406
66CA-8-6	1/2	3/8	11/16-20	13/16	1.35	1.12	.406
66CA-8-8	1/2	1/2	11/16-20	1	1.54	1.31	.406
66CA-10-8	5/8	1/2	13/16-18	1	1.62	1.38	.500

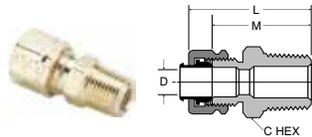


Male Connector 68CA

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
68CA-2-1	1/8	1/16	5/16-24	3/8	1.02	.78	.095
68CA-2-2	1/8	1/8	5/16-24	7/16	1.01	.77	.094
68CA-3-1	3/16	1/16	3/8-24	3/8	1.07	.84	.125
68CA-3-2	3/16	1/8	3/8-24	7/16	1.07	.84	.125
68CA-3-4	3/16	1/4	3/8-24	9/16	1.26	1.03	.125
68CA-4-2	1/4	1/8	7/16-24	7/16	1.10	.86	.188
68CA-4-4	1/4	1/4	7/16-24	9/16	1.31	1.06	.188
68CA-4-6	1/4	3/8	7/16-24	11/16	1.28	1.03	.188
68CA-4-8	1/4	1/2	7/16-24	7/8	1.56	1.31	.188
68CA-5-2	5/16	1/8	1/2-24	1/2	1.13	.89	.234
68CA-5-4	5/16	1/4	1/2-24	9/16	1.35	1.07	.250
68CA-6-2	3/8	1/8	9/16-24	9/16	1.19	.97	.250
68CA-6-4	3/8	1/4	9/16-24	9/16	1.36	1.14	.312
68CA-6-6	3/8	3/8	9/16-24	11/16	1.43	1.16	.312
68CA-6-8	3/8	1/2	9/16-24	7/8	1.52	1.25	.312
68CA-8-4	1/2	1/4	11/16-20	11/16	1.45	1.22	.312
68CA-8-6	1/2	3/8	11/16-20	11/16	1.43	1.20	.406
68CA-8-8	1/2	1/2	11/16-20	7/8	1.54	1.31	.406
68CA-10-6	5/8	3/8	13/16-18	13/16	1.55	1.31	.406
68CA-10-8	5/8	1/2	13/16-18	7/8	1.72	1.48	.500
68CA-10-12	5/8	3/4	13/16-18	1-1/16	1.80	1.56	.500
68CA-12-8	3/4	1/2	1-18	1	1.99	1.60	.562
68CA-12-12	3/4	3/4	1-18	1-1/16	2.02	1.63	.656
68CA-14-12	7/8	3/4	1-1/8-18	1-1/8	1.85	1.41	.750
68CA-16-12	1	3/4	1-1/4-18	1-1/4	1.83	1.39	.750
68CA-16-16	1	1	1-1/4-18	1-3/8	2.02	1.58	.875

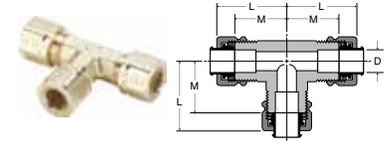


Union Tee 164CA-264CA

PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	FLOW DIA. D
164CA-2	1/8	5/16-24	.84	.61	.093
264CA-3	3/16	3/8-24	.83	.60	.125
164CA-4	1/4	7/16-24	.84	.63	.188
264CA-4	1/4	7/16-24	.84	.60	.188
164CA-5	5/16	1/2-24	.95	.71	.250
164CA-6	3/8	9/16-24	.96	.74	.312
164CA-8	1/2	11/16-20	1.15	.93	.406
164CA-10	5/8	13/16-18	1.32	1.08	.500
164CA-12	3/4	1.00-18	1.56	1.17	.562

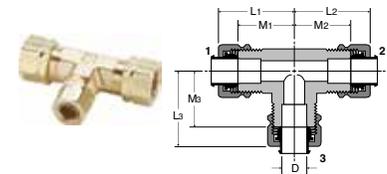

Union Tee 164CA combination sizes

PART NO.	1 TUBE SIZE	2 TUBE SIZE	3 TUBE SIZE	L1	L2	L3	M1	M2	M3	FLOW DIA. D
164CA-6-4-4	3/8	1/4	1/4	.97	.96	.96	.75	.72	.72	.188
164CA-6-6-4	3/8	3/8	1/4	.97	.97	.96	.75	.75	.72	.188
164CA-8-8-6	1/2	1/2	3/8	1.17	1.17	1.10	.94	.94	.88	.312

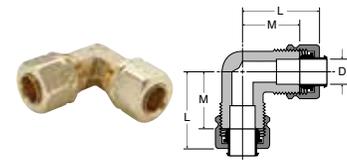


Union Elbow 165CA-265CA

PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	FLOW DIA. D
165CA-2	1/8	5/16-24	.84	.61	.094
165CA-3	3/16	3/8-24	.84	.61	.125
165CA-4	1/4	7/16-24	.84	.61	.188
265CA-4	1/4	7/16-24	.84	.60	.188
165CA-5	5/16	1/2-24	.94	.71	.250
165CA-6	3/8	9/16-24	.96	.74	.312
165CA-8	1/2	11/16-20	1.15	.93	.406
165CA-10	5/8	13/16-18	1.29	1.05	.500
165CA-12	3/4	1-18	1.56	1.17	.562
165CA-16	1	1-1/4-18	1.63	1.19	.877




Gage Tee 168CA

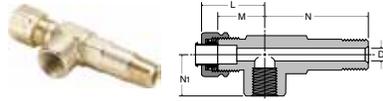

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	N1	FLOW DIA. D
168CA-4-2	1/4	1/8	7/16-24	.96	.72	1.41	.56	.188


Male Elbow 169CA-269CA

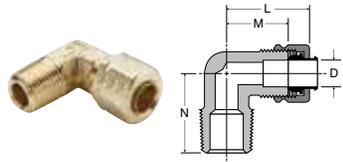

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
169CA-2-1	1/8	1/16	5/16-24	.84	.60	.67	.095
269CA-2-2	1/8	1/8	5/16-24	.84	.60	.67	.094
169CA-3-1	3/16	1/16	3/8-24	.84	.61	.67	.126
169CA-3-2	3/16	1/8	3/8-24	.84	.61	.69	.125
269CA-3-2	3/16	1/8	3/8-24	.83	.60	.67	.125
169CA-3-4	3/16	1/4	3/8-24	.87	.64	.93	.125
169CA-4-2	1/4	1/8	7/16-24	.84	.61	.74	.188
269CA-4-2	1/4	1/8	7/16-24	.84	.60	.73	.188
169CA-4-4	1/4	1/4	7/16-24	.86	.62	.94	.188
269CA-4-4	1/4	1/4	7/16-24	.84	.60	.79	.188
169CA-4-6	1/4	3/8	7/16-24	.92	.68	1.00	.188
169CA-5-2 *	5/16	1/8	1/2-24	.84	.61	.74	.234
269CA-5-2 *	5/16	1/8	1/2-24	.84	.60	.73	.250
169CA-5-4	5/16	1/4	1/2-24	.94	.71	.93	.250
269CA-5-4	5/16	1/4	1/2-24	.91	.67	.82	.250
169CA-5-6	5/16	3/8	1/2-24	.99	.75	1.00	.250
169CA-6-2 *	3/8	1/8	9/16-24	.96	.74	.74	.234
269CA-6-2 *	3/8	1/8	9/16-24	.96	.69	.75	.220
169CA-6-4	3/8	1/4	9/16-24	.96	.74	.93	.312
269CA-6-4	3/8	1/4	9/16-24	.95	.73	.92	.312
169CA-6-6	3/8	3/8	9/16-24	.97	.75	1.00	.312
269CA-6-6	3/8	3/8	9/16-24	1.06	.84	.97	.312
169CA-6-8	3/8	1/2	9/16-24	1.16	.94	1.27	.312
169CA-8-4 *	1/2	1/4	11/16-20	1.17	.94	1.00	.312
169CA-8-6	1/2	3/8	11/16-20	1.15	.93	1.11	.406
169CA-8-8	1/2	1/2	11/16-20	1.23	1.00	1.37	.406
169CA-10-6 *	5/8	3/8	13/16-18	1.30	1.06	1.15	.406
169CA-10-8	5/8	1/2	13/16-18	1.30	1.06	1.31	.500
169CA-12-8	3/4	1/2	1-18	1.57	1.18	1.49	.562
169CA-12-12	3/4	3/4	1-18	1.66	1.27	1.58	.562
169CA-16-12 *	1	3/4	1-1/4-18	1.63	1.19	1.60	.875


* For these parts the pipe thread through hole is smaller than the through hole on the tube end.

Female Elbow 170CA-270CA

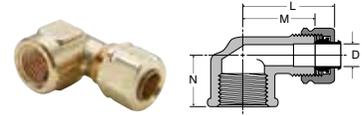


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
170CA-2-2	1/8	1/8	5/16-24	.93	.69	.56	.094
170CA-3-2	3/16	1/8	3/8-24	.98	.69	.56	.125
170CA-4-2	1/4	1/8	7/16-24	.98	.69	.56	.188
270CA-4-2	1/4	1/8	7/16-24	.91	.67	.54	.188
170CA-4-4	1/4	1/4	7/16-24	1.02	.78	.67	.188
170CA-6-4	3/8	1/4	9/16-24	1.09	.79	.73	.312
170CA-6-6	3/8	3/8	9/16-24	1.16	.89	.69	.312
170CA-8-6	1/2	3/8	11/16-20	1.23	1.00	.69	.406
170CA-8-8	1/2	1/2	11/16-20	1.38	1.15	.97	.406
170CA-12-12	3/4	3/4	1-18	1.97	1.58	1.58	.563

Male Run Tee 171CA

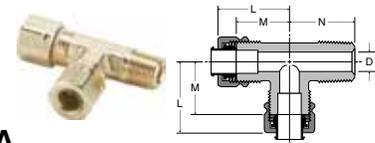


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
171CA-2-2	1/8	1/8	5/16-24	.84	.61	.67	.094
171CA-3-2	3/16	1/8	3/8-24	.83	.61	.67	.125
171CA-4-2	1/4	1/8	7/16-24	.88	.64	.75	.188
171CA-4-4	1/4	1/4	7/16-24	.93	.69	.92	.188
171CA-6-4	3/8	1/4	9/16-24	1.03	.81	1.03	.312

Male Branch Tee 172CA

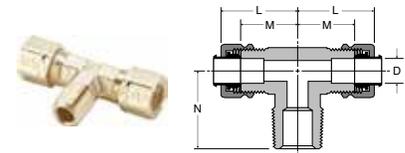


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
172CA-2-2	1/8	1/8	5/16-24	.84	.61	.67	.093
172CA-3-2	3/16	1/8	3/8-24	.83	.61	.67	.125
172CA-4-2	1/4	1/8	7/16-24	.84	.61	.74	.188
172CA-4-4	1/4	1/4	7/16-24	.93	.69	.92	.188
172CA-6-2	3/8	1/8	9/16-24	.97	.75	.75	.234
172CA-6-4	3/8	1/4	9/16-24	.99	.77	.92	.312
172CA-6-6	3/8	3/8	9/16-24	1.03	.81	1.00	.312
172CA-8-6	1/2	3/8	11/16-20	1.15	.93	1.10	.406
172CA-12-12	3/4	3/4	1-18	1.67	1.27	1.50	.562



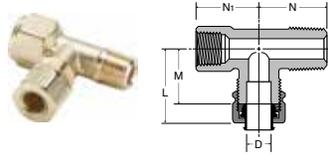


Adapter Tee 176CA

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	N1	FLOW DIA. D
176CA-4-2	1/4	1/8	7/16-24	.92	.69	.75	.66	.188

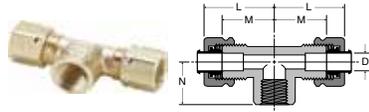

Female Branch Tee 177CA


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
177CA-4-2	1/4	1/8	7/16-24	.86	.63	.53	.188

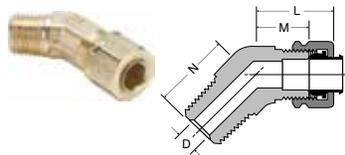

45° Elbow 179CA


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
179CA-4-2	1/4	1/8	7/16-24	.89	.66	.56	.188
179CA-4-4	1/4	1/4	7/16-24	.80	.56	.84	.188
179CA-6-2	3/8	1/8	9/16-24	.85	.63	.65	.234
179CA-6-4	3/8	1/4	9/16-24	.85	.63	.84	.312
179CA-6-6	3/8	3/8	9/16-24	.97	.75	.95	.312
179CA-8-6	1/2	3/8	11/16-20	1.03	.81	.95	.406

G

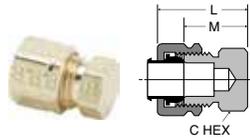

Seal Plug 639CA

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	M
639CA-4	1/4	7/16-24	7/16	.74	.50

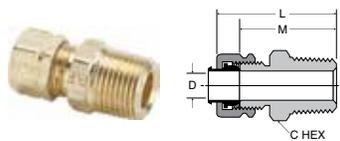

Straight Through Tank Fitting 682CA

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
682CA-3-2	3/16	1/8	3/8-24	7/16	1.07	.84	.194



Metru-Lok™

MATERIALS OF CONSTRUCTION	
FITTING:	BRASS
NUT:	BRASS
FERRULE:	BRASS

SPECIFICATIONS	
TEMPERATURE RANGE:	FROM -65° TO +250°F
TUBE MATERIAL:	COPPER, ALUMINUM, THERMOPLASTIC TUBING
TUBE O.D.(MM):	4,6,8,10,12,14,16,18,20,22
OPERATING FLUID:	WATER, AIR, INERT AND NON-COMBUSTIBLE GASSES COMPATIBLE WITH MATERIALS OF CONSTRUCTION
NOTE:	FOR OTHER TYPES OF FLUIDS OR GASSES, PLEASE CONSULT FACTORY


Assembly Instructions

1. Cut the tube square.
2. De-burr (copper tube).
3. Insert the tube through the nut and ferrule until it bottoms.
4. Finger tighten the nut.
5. Wrench tighten the nut one turn, or one and one half turns, according to size.




A one piece, ready to use, bite type fitting. Preassembled fitting with captive ferrule. No presetting of the ferrule is necessary. Visible ferrule allows for visual inspection before and after assembly.

Technical Features

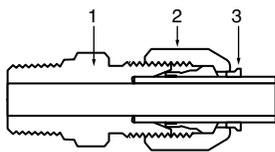


MATERIAL			WORKING TEMP.	WORKING PRESSURE* DEPENDING ON TUBE O. D.							
1	2	3		TUBE O.D. MM	4	6	8	10	12	14	16 TO 20
BODY BRASS	NUT BRASS	FERRULE BRASS	FROM -65° TO +250° F	MM	2600	2600	1800	1500	1300	1000	800

Fitting Dimensions

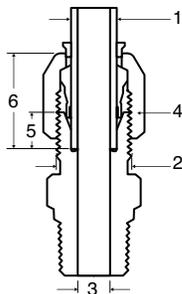


1 TUBE O.D. MM	2 METRIC STRAIGHT THREAD	3 INSIDE DIAMETER MM	4 HEX OF NUT MM	5 TUBE ENTRY BODY MM	6 TUBE ENTRY COMPL. FITTING MM	7 WRENCH TIGHTENING IN TURNS
4	M8X1	2	10	4	12	1 1/2
6	M10X1	4	12	5	13	1 1/2
8	M12X1	6	14	6	14	1 1/2
10	M14X1	8	17	6	14	1 1/2
12	M16X1	10	19	7	15	1 1/2
14	M18X1	12	22	8	16	1 1/2
16	M22X1.50	14	27	8	16	1
18	M24X1.50	16	30	9	21	1
20	M26X1.50	18	32	9	21	1
22	M28X1.50	20	36	10	22	1

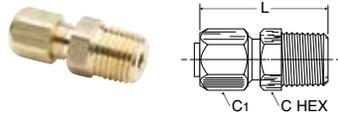

**FBMB
Male Connector NPT**


PART NO.	TUBE SIZE	NPT THREAD	C HEX	C1	L
FBMB4-1/16	4	1/16	8	10	26
FBMB4-1/8	4	1/8	11	10	27
FBMB6-1/8	6	1/8	11	12	28
FBMB6-1/4	6	1/4	14	12	32
FBMB8-1/8	8	1/8	12	14	29
FBMB8-1/4	8	1/4	14	14	33
FBMB10-1/4	10	1/4	14	17	33
FBMB10-3/8	10	3/8	19	17	34
FBMB12-3/8	12	3/8	19	19	35
FBMB12-1/2	12	1/2	22	19	40
FBMB14-3/8	14	3/8	19	22	36
FBMB14-1/2	14	1/2	22	22	41
FBMB16-1/2	16	1/2	22	27	40
FBMB18-1/2	18	1/2	24	30	46
FBMB20-3/4	20	3/4	27	32	47
FBMB22-3/4	22	3/4	30	36	49

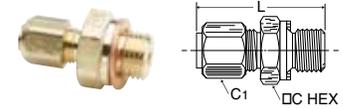

F4BMB Male Connector BSPP

PART NO.	TUBE SIZE	BSPP THREAD	C HEX	C1	L
F4BMB4-1/8	4	1/8	14	10	29
F4BMB6-1/8	6	1/8	14	12	30
F4BMB6-1/4	6	1/4	19	12	32
F4BMB8-1/4	8	1/4	19	14	33
F4BMB10-1/4	10	1/4	19	17	33


These parts are supplied with a copper seal.

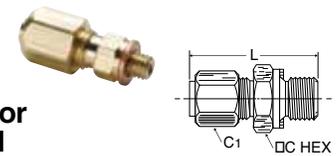

**F8BMB Male Connector
Metric Straight Thread**


PART NO.	TUBE SIZE	MM THREAD	C HEX	C1	L
F8BMB4M5	4	M5X0.8	8	10	24
F8BMB12M16	12	M16X1.5	22	19	37
F8BMB12M22	12	M22X1.5	27	19	40
F8BMB14M16	14	M16X1.5	22	22	38
F8BMB16M16	16	M16X1.5	22	27	37
F8BMB16M22	16	M22X1.5	27	27	40

These parts are supplied with a copper seal.

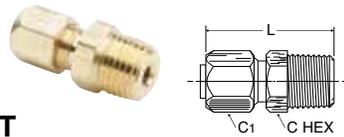

**F3BMB
Male Connector BSPT**


PART NO.	TUBE SIZE	BSPT THREAD	C HEX	C1	L
F3BMB4-1/8	4	1/8	10	10	24.0
F3BMB6-1/8	6	1/8	11	12	26.0
F3BMB6-1/4	6	1/4	14	12	29.5
F3BMB8-1/8	8	1/8	12	14	27.5
F3BMB8-1/4	8	1/4	14	14	30.5
F3BMB10-1/4	10	1/4	14	17	30.5
F3BMB10-3/8	10	3/8	17	17	31.0
F3BMB12-3/8	12	3/8	17	19	32.4
F3BMB12-1/2	12	1/2	22	19	35.5
F3BMB14-3/8	14	3/8	19	22	33.2
F3BMB14-1/2	14	1/2	22	22	36.2
F3BMB16-3/8	16	3/8	22	27	34.2
F3BMB16-1/2	16	1/2	22	27	36.4
F3BMB18-1/2	18	1/2	24	30	42.3
F3BMB20-3/4	20	3/4	27	32	43.0
F3BMB22-3/4	22	3/4	30	36	45.0

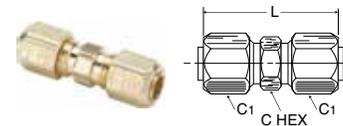

HBMB Equal Union


PART NO.	TUBE SIZE	C HEX	C1	L
HBMB4	4	8	10	31
HBMB6	6	10	12	34
HBMB8	8	12	14	37
HBMB10	10	14	17	37
HBMB12	12	17	19	39
HBMB14	14	19	22	41
HBMB16	16	22	27	41
HBMB18	18	24	30	51
HBMB22	22	30	36	54



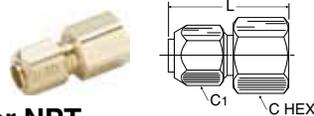


GBMB Female Connector NPT

PART NO.	TUBE SIZE	NPT THREAD	C HEX	C1	L
GBMB6-1/8	6	1/8	14	12	29
GBMB6-1/4	6	1/4	19	12	32
GBMB8-1/8	8	1/8	14	14	30
GBMB8-1/4	8	1/4	19	14	33
GBMB10-1/4	10	1/4	19	17	33
GBMB10-3/8	10	3/8	22	17	35
GBMB12-3/8	12	3/8	22	19	36
GBMB12-1/2	12	1/2	27	19	38
GBMB14-3/8	14	3/8	22	22	37
GBMB14-1/2	14	1/2	27	27	39
GBMB16-1/2	16	1/2	27	27	39

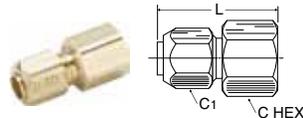


G4BMB Female Connector BSPP

PART NO.	TUBE SIZE	BSPP THREAD	C HEX	C1	L
G4BMB4-1/8	4	1/8	14	10	26
G4BMB6-1/8	6	1/8	14	12	27
G4BMB6-1/4	6	1/4	19	12	29
G4BMB8-1/8	8	1/8	14	14	28
G4BMB8-1/4	8	1/4	19	14	30
G4BMB10-1/4	10	1/4	19	17	30
G4BMB10-3/8	10	3/8	22	17	32
G4BMB12-3/8	12	3/8	22	19	33
G4BMB12-1/2	12	1/2	27	19	36
G4BMB14-3/8	14	3/8	22	22	34
G4BMB14-1/2	14	1/2	27	22	37
G4BMB16-1/2	16	1/2	27	27	37
G4BMB18-1/2	18	1/2	27	30	41

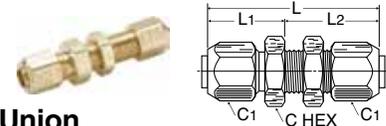


WBMB Bulkhead Union

PART NO.	TUBE SIZE	MM THREAD	C HEX	C1	L	L1	L2	BULKHEAD HOLE DIA.
WBMB4	4	M8X1	12	10	47	19	28	8MM
WBMB6	6	M10X1	14	12	49	20	29	10MM
WBMB8	8	M12X1	16	14	52	21	31	12MM
WBMB10	10	M14X1	19	17	53	22	31	14MM
WBMB12	12	M16X1	22	19	56	24	32	16MM
WBMB14	14	M18X1	24	22	60	26	34	18MM
WBMB16	16	M22X1.5	27	27	58	25	33	22MM
WBMB18	18	M24X1.5	30	30	70	31	39	24MM
WBMB20	20	M26X1.5	32	32	70	31	39	26MM
WBMB22	22	M28X1.5	36	36	74	33	41	28MM

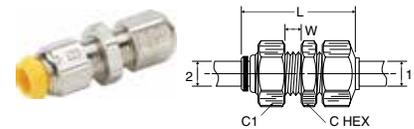

WBMPB Mixed Bulkhead Union


PART NO.	TUBE SIZE 1	TUBE SIZE 2	MM THREAD	C1	C HEX	L	W	BULKHEAD HOLE DIA.
WBMPB4	4	4	M8X1	10	12	34	5	8MM
WBMPB6	6	6	M10X1	12	12	37	5	10MM
WBMPB8	8	8	M12X1	14	16	39	5	12MM
WBMPB10	10	10	M14X1	17	19	45	5	14MM
WBMPB12	12	12	M16X1	19	22	49	5	16MM

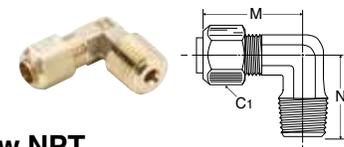

CBMB 90° Male Elbow NPT


PART NO.	TUBE SIZE	NPT THREAD	C1	M	N
CBMB4-1/8	4	1/8	10	22	17
CBMB6-1/8	6	1/8	12	24	18
CBMB6-1/4	6	1/4	12	24	22
CBMB8-1/8	8	1/8	14	26	19
CBMB8-1/4	8	1/4	14	26	23
CBMB10-1/4	10	1/4	17	27	24
CBMB10-3/8	10	3/8	17	28	25
CBMB12-3/8	12	3/8	19	32	27
CBMB12-1/2	12	1/2	19	32	31
CBMB14-3/8	14	3/8	22	32	26
CBMB14-1/2	14	1/2	22	33	31
CBMB16-1/2	16	1/2	27	35	34
CBMB18-1/2	18	1/2	30	41	35
CBMB22-3/4	22	3/4	36	46	40



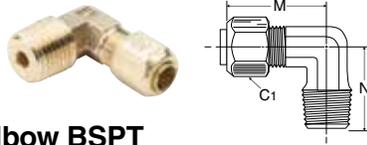

C3BMB 90° Male Elbow BSPT

PART NO.	TUBE SIZE	BSPT THREAD	C1	M	N
C3BMB4-1/8	4	1/8	10	22	17.0
C3BMB6-1/8	6	1/8	12	24	17.0
C3BMB6-1/4	6	1/4	12	24	20.5
C3BMB8-1/8	8	1/8	14	26	18.0
C3BMB8-1/4	8	1/4	14	26	21.5
C3BMB10-1/4	10	1/4	17	27	22.5
C3BMB10-3/8	10	3/8	17	28	22.1
C3BMB12-3/8	12	3/8	19	32	25.1
C3BMB12-1/2	12	1/2	19	32	27.8
C3BMB14-3/8	14	3/8	22	32	24.1
C3BMB14-1/2	14	1/2	22	32	27.3
C3BMB16-1/2	16	1/2	27	35	30.8
C3BMB18-1/2	18	1/2	30	41	31.8
C3BMB22-3/4	22	3/4	36	46	36.5

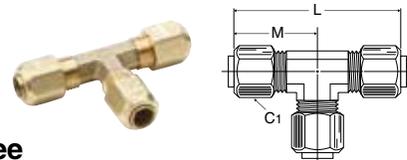


JBMB Union Tee

PART NO.	TUBE SIZE	C1	L	M
JBMB4	4	10	47	23.5
JBMB6	6	12	48	24.0
JBMB8	8	14	52	26.0
JBMB10	10	17	54	27.0
JBMB12	12	19	63	31.5
JBMB14	14	22	63	31.5
JBMB16	16	27	69	34.5
JBMB20	20	32	89	44.5
JBMB22	22	36	91	45.5




C8BMB 90° Adjustable Male Elbow Metric Straight Thread

PART NO.	TUBE SIZE	MM THREAD	C1	C4	M	N
C8BMB12M22	12	M22X1.5	19	30	35	39
C8BMB14M16	14	M16X1.5	22	22	32	33
C8BMB14M22	14	M22X1.5	22	30	35	39
C8BMB16M16	16	M16X1.5	24	22	35	36
C8BMB16M22	16	M22X1.5	27	30	36	39

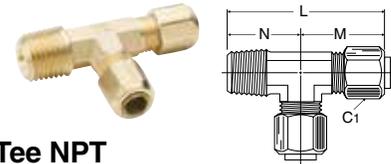

RBMB Male Run Tee NPT


PART NO.	TUBE SIZE	NPT THREAD	C1	L	M	N
RBMB6-1/4	6	1/4	12	48	25	23
RBMB8-1/8	8	1/8	14	45	26	19
RBMB8-1/4	8	1/4	14	49	26	23
RBMB12-3/8	12	3/8	19	59	32	27
RBMB12-1/2	12	1/2	19	63	32	31
RBMB14-3/8	14	3/8	22	60	33	28
RBMB14-1/2	14	1/2	22	64	33	31
RBMB16-1/2	16	1/2	22	69	35	34

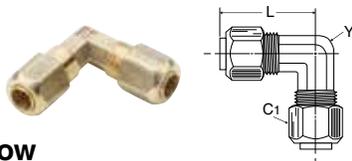

EBMB 90° Union Elbow


PART NO.	TUBE SIZE	C1	L	Y
EBMB4	4	10	22	7
EBMB6	6	12	24	8
EBMB8	8	14	26	10
EBMB10	10	17	27	12
EBMB12	12	19	32	14
EBMB14	14	22	32	16



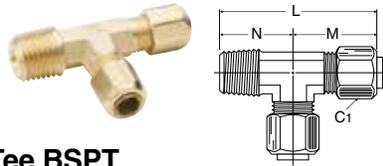


R3BMB Male Run Tee BSPT

PART NO.	TUBE SIZE	BSPT THREAD	C1	L	M	N
R3BMB6-1/8	6	1/8	12	42	24	18
R3BMB6-1/4	6	1/4	12	48	25	23
R3BMB8-1/8	8	1/8	14	45	26	19
R3BMB8-1/4	8	1/4	14	49	26	23
R3BMB10-3/8	10	3/8	17	52	28	24
R3BMB12-3/8	12	3/8	19	59	32	27
R3BMB12-1/2	12	1/2	19	63	32	31
R3BMB14-3/8	14	3/8	22	59	32	28
R3BMB14-1/2	14	1/2	22	63	33	31
R3BMB16-1/2	16	1/2	27	69	35	34

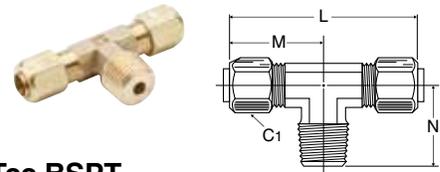


S3BMB Male Branch Tee BSPT

PART NO.	TUBE SIZE	BSPT THREAD	C1	L	M	N
S3BMB6-1/8	6	1/8	12	48	24.0	18
S3BMB6-1/4	6	1/4	12	49	24.5	23
S3BMB8-1/8	8	1/8	14	52	26.0	19
S3BMB8-1/4	8	1/4	14	52	26.0	23
S3BMB10-3/8	10	3/8	17	54	27.0	24
S3BMB10-3/8	10	3/8	17	56	28.0	24
S3BMB12-3/8	12	3/8	19	63	31.5	27
S3BMB12-1/2	12	1/2	19	63	31.5	31
S3BMB14-3/8	14	3/8	22	63	31.5	28
S3BMB14-1/2	14	1/2	22	65	32.5	31
S3BMB16-1/2	16	1/2	27	69	34.5	34

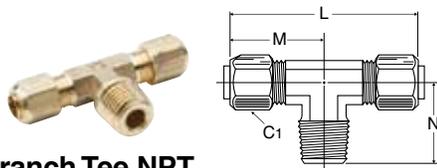

SBMB Male Branch Tee NPT

PART NO.	TUBE SIZE	NPT THREAD	C1	L	M	N
SBMB6-1/8	6	1/8	12	48	24.0	18
SBMB6-1/4	6	1/4	12	50	25.0	23
SBMB8-1/4	8	1/4	14	52	26.0	23
SBMB10-1/4	10	1/4	17	56	28.0	24
SBMB12-3/8	12	3/8	19	63	31.5	25

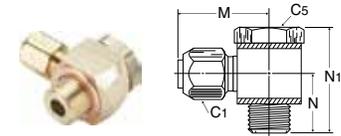


COR4BMB Single Banjo BSPP

PART NO.	TUBE SIZE	BSPP THREAD	C1	C5	M	N	N1
COR4BMB4-1/8	4	1/8	10	14	23	15	27
COR4BMB6-1/4	6	1/4	12	19	26	18	29
COR4BMB8-1/4	8	1/4	14	19	27	20	35
COR4BMB14-1/2	14	1/2	22	27	34	27	48
COR4BMB16-1/2	16	1/2	27	27	33	27	48
COR4BMB20-3/4	20	3/4	32	32	41	33	60




T2HFB Tube End Male Adapter NPT

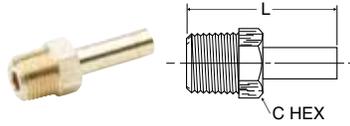

PART NO.	TUBE SIZE	NPT THREAD	C HEX	L
T2HFB6-1/8	6	1/8	11	31
T2HFB6-1/4	6	1/4	14	36
T2HFB8-1/4	8	1/4	14	36
T2HFB10-1/4	10	1/4	14	37
T2HFB12-3/8	12	3/8	19	38
T2HFB12-1/2	12	1/2	22	43
T2HFB14-3/8	14	3/8	19	39
T2HFB14-1/2	14	1/2	22	44
T2HFB16-1/2	16	1/2	22	46
T2HFB18-1/2	18	1/2	22	50

T28HFB Tube Adapter Metric Straight Thread

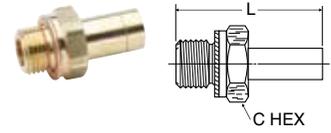


PART NO.	TUBE SIZE	MM THREAD	C HEX	L
T28HFB12M14	12	M14X1.5	19	39
T28HFB12M16	12	M16X1.5	22	40
T28HFB12M18	12	M18X1.5	24	40
T28HFB12M22	12	M22X1.5	27	43
T28HFB14M16	14	M16X1.5	22	41

T23HFB Tube End Male Adapter BSPT



PART NO.	TUBE SIZE	BSPT THREAD	C HEX	L
T23HFB6-1/8	6	1/8	10	30
T23HFB6-1/4	6	1/4	14	34
T23HFB8-1/8	8	1/8	10	30
T23HFB8-1/4	8	1/4	14	35
T23HFB10-1/4	10	1/4	14	36
T23HFB10-3/8	10	3/8	17	36
T23HFB14-3/8	14	3/8	17	38
T23HFB14-1/2	14	1/2	22	41
T23HFB16-1/2	16	1/2	22	43
T23HFB18-1/2	18	1/2	22	47
T23HFB20-3/4	20	3/4	27	49
T23HFB22-3/4	22	3/4	27	51


T2HGB Tube End Female Adapter NPT

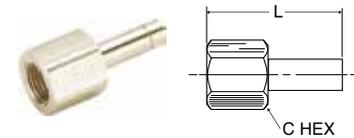

PART NO.	TUBE SIZE	NPT THREAD	C HEX	L
T2HGB6-1/8	6	1/8	14	32
T2HGB6-1/4	6	1/4	19	35
T2HGB8-1/4	8	1/4	19	36
T2HGB10-1/4	10	1/4	19	37
T2HGB12-3/8	12	3/8	22	39
T2HGB12-1/2	12	1/2	27	41
T2HGB14-3/8	14	3/8	22	40
T2HGB16-1/2	16	1/2	27	44
T2HGB18-1/2	18	1/2	27	48
T2HGB20-3/4	20	3/4	32	49
T2HGB22-3/4	22	3/4	32	51




T24HGB Tube End Female Adapter BSPP

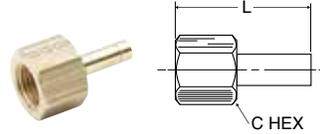


PART NO.	TUBE SIZE	BSPP THREAD	C HEX	L
T24HGB6-1/8	6	1/8	14	30
T24HGB6-1/4	6	1/4	19	32
T24HGB8-1/8	8	1/8	14	31
T24HGB8-1/4	8	1/4	19	33
T24HGB10-1/4	10	1/4	19	34
T24HGB10-3/8	10	3/8	22	36
T24HGB12-3/8	12	3/8	22	36
T24HGB12-1/2	12	1/2	27	40
T24HGB14-3/8	14	3/8	22	37
T24HGB16-1/2	16	1/2	27	42
T24HGB18-1/2	18	1/2	27	46
T24HGB20-3/4	20	3/4	32	47
T24HGB22-3/4	22	3/4	32	49

BTMB Nut and Ferrule




PART NO.	TUBE SIZE	C1	L
BTMB4	4	10	12
BTMB6	6	12	13
BTMB8	8	14	14
BTMB10	10	17	14
BTMB12	12	19	15
BTMB14	14	22	16
BTMB16	16	27	16
BTMB18	18	30	21
BTMB20	20	32	21
BTMB22	22	36	22

BMB Nut




PART NO.	TUBE SIZE	C1	L
BMB4	4	10	11
BMB6	6	12	12
BMB8	8	14	13
BMB10	10	17	13
BMB12	12	19	14
BMB14	14	22	15
BMB18	18	30	19
BMB22	22	36	20

FNMB Fitting Body Cap




PART NO.	TUBE SIZE	C1	L
FNMB4	4	10	14
FNMB6	6	12	15
FNMB8	8	14	16
FNMB16	16	27	18
FNMB18	18	30	23
FNMB20	20	32	23
FNMB22	22	36	24

PNMB Tube Plug

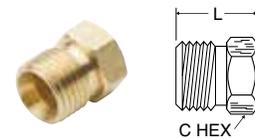


PART NO.	TUBE SIZE	C HEX	L
PNMB8	8	12	15
PNMB10	10	14	15
PNMB12	12	17	16
PNMB14	14	19	17
PNMB16	16	22	18
PNMB18	18	24	20
PNMB20	20	27	20
PNMB22	22	30	22






TMB Ferrule

PART NO.	TUBE SIZE	L
TMB4A	4	10
TMB6A	6	10
TMB8A	8	10
TMB10A	10	10
TMB12A	12	10
TMB14A	14	10
TMB16A	16	10
TMB18A	18	14
TMB20A	20	14
TMB22A	22	14

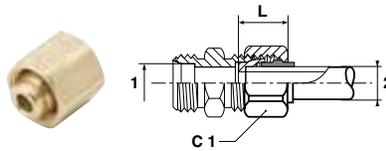

**TRBMB
Tube End Reducer**

PART NO.	TUBE 1	TUBE 2	C1	L
TRBMB6-4	6	4	12	14
TRBMB8-4	8	4	14	15
TRBMB8-6	8	6	14	15
TRBMB10-6	10	6	17	16
TRBMB10-8	10	8	17	16
TRBMB12-8	12	8	19	16
TRBMB12-10	12	10	19	16
TRBMB14-10	14	10	22	18
TRBMB14-12	14	12	22	18
TRBMB16-14	16	14	27	19
TRBMB18-14	18	14	30	21
TRBMB20-16	20	16	32	21
TRBMB22-18	22	18	36	21

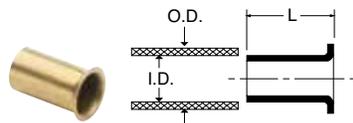

T23UB Tube Insert

PART NO.	TUBE I.D.	TUBE O.D.	L
T23UB4	4	6	10
T23UB6	6	8	15
T23UB8	8	10	15
T23UB10	10	12	15
T23UB12	12	14	15

G



Poly-Tite Fittings

MATERIALS OF CONSTRUCTION	
BODIES & NUTS:	CA377, CA360, CA345, 316 STAINLESS STEEL
PLASTIC SLEEVES:	ACETAL COPOLYMER
O-RINGS:	BUNA N ON CHROME PLATED COUPLINGS FLUOROCARBON ON STAINLESS STEEL COUPLINGS

NOMENCLATURE	
EXAMPLE: 66P-4-2	ATTRIBUTE:
66	FEMALE CONNECTOR (TUBE TO FEMALE PIPE)
P	POLY-TITE
4	1/4" TUBE O.D.
2	1/8" PIPE THREAD

APPLICABLE TUBE	
TUBE MATERIAL:	THERMOPLASTIC TUBING,
TUBE O.D.:	¼, 5/16, 3/8, ½

PRESSURE AND TEMPERATURE RANGE	
THERMOPLASTIC TUBING	UP TO 150 PSI FROM 0° TO +150°F



A preassembled compact compression fitting. An exclusive acetal copolymer sleeve has superior resilience to resist creeping and stress caused from compression. Poly-Tite nuts will rotate around the sleeve as it tightens to prevent twisting and weakening of the plastic tubing.


Assembly Instructions

Polyethylene, polypropylene and vinyl tubing:

1. Cut tubing squarely—maximum of 15° angle allowable.
2. Check that port or mating part is clean and free of debris.
3. Insert tube end until it bottoms in the Poly-Tite fitting and tighten knurl/hex nut finger-tight — plus one wrench turn.

Tube Support O.D.

TUBE SIZE INCHES	* D1 TUBE SUPPORT O.D.
1/4	.168
5/16	.185
3/8	.248
1/2	.373






Spring Guard 56PSG

PART NO.	TUBE O.D.	L
56PSG-4	1/4	3.000
56PSG-5	5/16	3.000
56PSG-6	3/8	3.000




Plastic Cap 59P

PART NO.	TUBE SIZE	A	L
59P-4	1/4	.247	.50
59P-5	5/16	.307	.53
59P-6	3/8	.372	.56
59P-8	1/2	.497	.63




Acetal Plastic Sleeve 60P

PART NO.	TUBE SIZE	A	D	L
60P-4	1/4	.334	.261	.338
60P-5	5/16	.405	.321	.340
60P-6	3/8	.465	.381	.367
60P-8	1/2	.628	.514	.399




Sleeve 60PB

PART NO.	L	O.D.	I.D.
60PB-4	.187	.336	.255
60PB-5	.187	.400	.318
60PB-6	.218	.460	.382
60PB-8	.250	.620	.507




Nut and Plastic Sleeve Assembly 61P

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
61P-4	1/4	3/8-24	7/16	.261	.38
61P-5	5/16	7/16-24	1/2	.321	.34
61P-6	3/8	1/2-24	9/16	.380	.38
61P-8	1/2	11/16-20	3/4	.514	.44



Nut and Brass Sleeve Assembly 61PB

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	D	L
61PB-4	1/4	3/8-24	7/16	.255	.38
61PB-5	5/16	7/16-24	1/2	.318	.34
61PB-6	3/8	1/2-24	9/16	.382	.38
61PB-8	1/2	11/16-20	3/4	.507	.44




Nut 61PN

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L
61PN-4	1/4	3/8-24	7/16	.38
61PN-5	5/16	7/16-24	1/2	.34
61PN-6	3/8	1/2-24	9/16	.38
61PN-8	1/2	11/16-20	3/4	.44



Nut only for use with Spring Gaurd 61PSGN

PART NO.	TUBE O.D.	L	C HEX
61PSGN-4	1/4	.625	.437
61PSGN-5	5/16	.625	.500
61PSGN-6	3/8	.656	.562

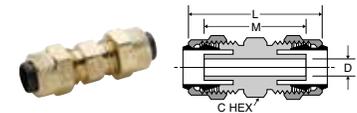


Union 62P

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62P-4	1/4	3/8-24	3/8	1.17	.96	.125
62P-5	5/16	7/16-24	7/16	1.16	.96	.144
62P-6	3/8	1/2-24	1/2	1.23	.99	.204
62P-8	1/2	11/16-20	11/16	1.47	1.24	.323




Union Reducer 62P

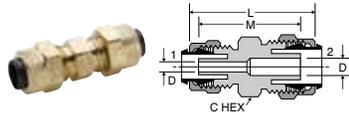

PART NO.	1 TUBE SIZE	2 TUBE SIZE	1 STRAIGHT THREAD	2 STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62P-6-4	1/4	3/8	3/8-24	1/2-24	1/2	1.22	.99	.125


Bulkhead Union 62PTBH

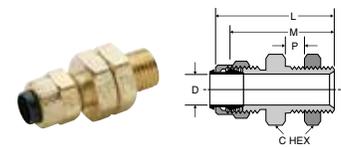

(Straight Through)


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	P MAX.	L	M	BULKHEAD HOLE DIA.	FLOW DIA. D
62PTBH-4	1/4	3/8-24	9/16	.31	1.19	.93	3/8	.260
62PTBH-5	5/16	7/16-24	5/8	.31	1.19	.93	7/16	.323
62PTBH-6	3/8	1/2-24	11/16	.34	1.26	.99	1/2	.387

Bulkhead Union 62PBH

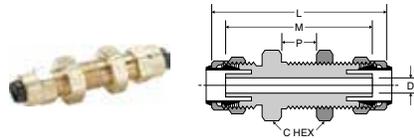

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	P MAX.	L	M	BULKHEAD HOLE DIA.	FLOW DIA. D
62PBH-4	1/4	3/8-24	9/16	.38	1.75	1.53	3/8	.125
62PBH-5	5/16	7/16-24	5/8	.38	1.71	1.52	7/16	.144
62PBH-6	3/8	1/2-24	11/16	.47	1.89	1.65	1/2	.204
62PBH-8	1/2	11/16-20	7/8	.63	2.28	2.05	11/16	.323


Brass Insert 63PT



PART	TUBE SIZE	L	O.D.
63PT-2-16	1/8	.46	.080
63PT-2-32	1/8	.31	.061
63PT-3-25	3/16	.45	.135
63PT-3-40	3/16	.52	.095


Union 62PCA

(Tube to Compress-Align)

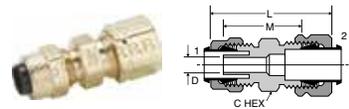

PART NO.	TUBE SIZE	1 STRAIGHT THREAD	2 STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
62PCA-4	1/4	3/8-24	7/16-24	7/16	1.25	.89	.125
62PCA-5	5/16	7/16-24	1/2-24	1/2	1.30	.92	.144
62PCA-6	3/8	1/2-24	9/16-24	9/16	1.37	.98	.204


Female Connector 66P

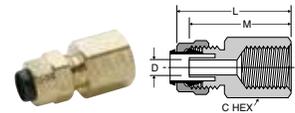


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
66P-4-2	1/4	1/8	3/8-24	9/16	.97	.86	.125
66P-4-4	1/4	1/4	3/8-24	5/8	1.18	1.07	.125
66P-5-2	5/16	1/8	7/16-24	9/16	.97	.86	.144
66P-6-4	3/8	1/4	1/2-24	5/8	1.18	1.07	.204
66P-8-6	1/2	3/8	11/16-20	13/16	1.31	1.20	.323

Bulkhead Union 62PCABH

(Tube to Compress-Align)

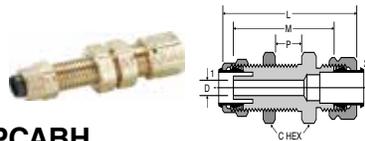

PART NO.	TUBE SIZE	1 STR THD	2 STR THD	C HEX	P MAX	L	M	BLKHD HOLE DIA.	FLOW DIA. D
62PCABH-4	1/4	3/8-24	7/16-24	9/16	.38	1.81	1.45	3/8	.125
62PCABH-6	3/8	1/2-24	9/16-24	11/16	.47	2.03	1.64	1/2	.204

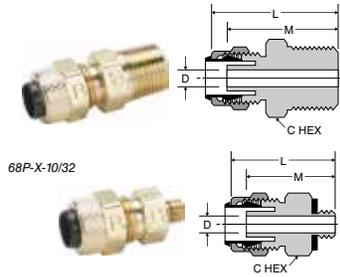


Male Connector 68P

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. D
68P-4-1	1/4	1/16	3/8-24	3/8	1.06	.95	.125
68P-4-10X32	1/4	10-32	3/8-24	3/8	.86	.75	.094
68P-4-2	1/4	1/8	3/8-24	7/16	1.06	.95	.125
68P-4-4	1/4	1/4	3/8-24	9/16	1.25	1.14	.125
68P-4-6	1/4	3/8	3/8-24	11/16	1.28	1.17	.125
68P-5-2	5/16	1/8	7/16-24	7/16	1.05	.95	.144
68P-5-4	5/16	1/4	7/16-24	9/16	1.24	1.14	.144
68P-6-2	3/8	1/8	1/2-24	1/2	1.10	.98	.204
68P-6-4	3/8	1/4	1/2-24	9/16	1.29	1.17	.204
68P-6-6	3/8	3/8	1/2-24	11/16	1.29	1.17	.204
68P-8-4	1/2	1/4	11/16-20	11/16	1.46	1.29	.320
68P-8-6	1/2	3/8	11/16-20	11/16	1.37	1.29	.323

Pipe Coupler Body 391PSS


(Stainless Steel)

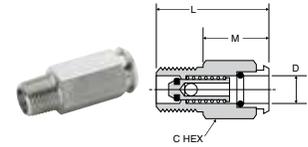

PART NO.	D INSERT DIA.	PIPE THREAD	L	C HEX	M
391PSS-4-2	1/4	1/8	1.271	.500	.900
391PSS-4-4	1/4	1/4	1.271	.562	.710
391PSS-6-4	3/8	1/4	1.40	.625	.840

Bulkhead Coupler Body 392P


(Chrome Plated)

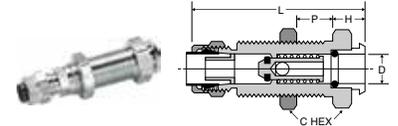


PART NO.	TUBE SIZE	D-INSERT DIA.	STRAIGHT THREAD	C HEX	P MAX.	H	L	BULKHEAD HOLE DIA.
392P-4-4	1/4	1/4	1/2-24	5/8	.84	.39	2.13	1/2
392P-6-6	3/8	3/8	11/16-24	13/16	.93	.37	2.01	11/16

Bulkhead Coupler Body 392PSS

(Stainless Steel)

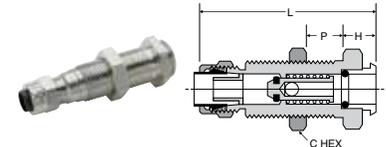

PART NO.	TUBE O.D.	BULKHEAD THREAD	L	C HEX	H	P MAX	BULKHEAD HOLE DIA.
392PSS-4-4	1/4	1/2-24	2.03	.625	.28	.84	1/2
392PSS-6-6	3/8	11/16-24	2.20	.812	.31	.93	11/16

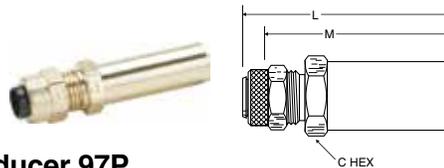


Tube End Reducer 97P

PART NO.	TUBE O.D.	L	M	C HEX
97P-4-6	3/8 X 1/4	1.718	1.625	.437
97P-6-8	1/2 X 3/8	1.875	1.781	.562

Through Type Insert 393P


(Chrome Plated)

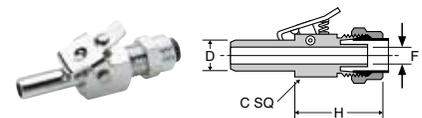

PART NO.	TUBE SIZE	D-INSERT DIA.	STRAIGHT THREAD	C SQUARE	H	FLOW DIA. F
393P-4-4	1/4	1/4	3/8-24	7/16	1.12	.125
393P-6-6	3/8	3/8	1/2-24	1/2	1.34	.203

Pipe Coupler Body 391P


(Chrome Plated)

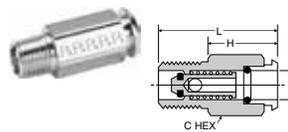

PART NO.	D-INSERT DIA.	PIPE THREAD	C HEX	H	L
391P-4-2	1/4	1/8	1/2	.91	1.29
391P-4-4	1/4	1/4	9/16	.73	1.29
391P-6-4	3/8	1/4	5/8	.85	1.41

Through Type Insert 393PSS

(Stainless Steel)

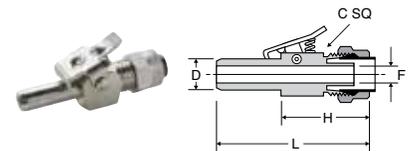


PART NO.	TUBE O.D.	D-INSERT DIA.	L	C SQUARE	H	FLOW DIA. F
393PSS-4-4	1/4	1/4	1.677	7/16	.99	.125
393PSS-6-6	3/8	3/8	2.030	1/2	1.27	.203



Shutoff Type Insert 393PD


(Chrome Plated)



PART NO.	TUBE SIZE	D-INSERT DIA.	STRAIGHT THREAD	C SQUARE	H	FLOW DIA. F
393PD-4-4	1/4	1/4	3/8-24	7/16	1.61	.110
393PD-6-6	3/8	3/8	1/2-24	1/2	1.45	.187

Shut-Off Type Insert 393PDSS


(Stainless Steel)



PART NO.	TUBE O.D.	D-INSERT DIA.	L	C SQUARE	H	FLOW DIA. F
393PDSS-4-4	1/4	1/4	2.46	.500	1.62	.116
393PDSS-6-6	3/8	3/8	2.60	.500	1.67	.157

Single End Shutoff Bulkhead Quick Coupler 394P


(Chrome Plated)

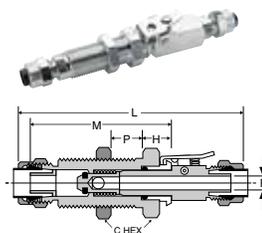

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	P MAX	H	L	M	BULKHEAD HOLE DIA.	FLOW DIA. F
394P-4-4	1/4	1/2-24	5/8	.84	.39	3.28	2.13	1/2	.125
394P-6-6	3/8	11/16-24	13/16	.93	.37	3.41	2.01	11/16	.203

Coupler Single End Shut-Off Bulkhead 394PSS


(Stainless Steel)

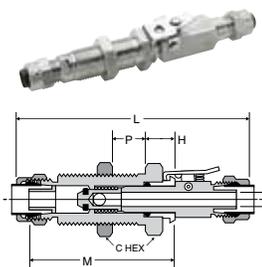

PART NO.	TUBE O.D.	BULKHEAD THREAD	L	M	C HEX	H	P MAX	FLOW DIA. F
394PSS-4-4	1/4	1/2-24	3.05	2.06	.625	.31	.84	.125
394PSS-6-6	3/8	11/16-24	3.50	2.23	.812	.34	.93	.203

Double End Shutoff Bulkhead Quick Coupler 394PD


(Chrome Plated)

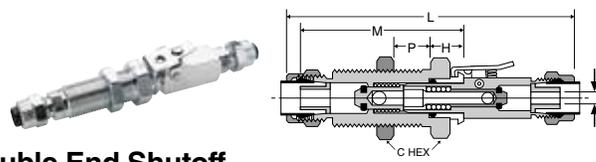

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	P MAX	H	L	M	BULKHEAD HOLE DIA.	FLOW DIA. F
394PD-4-4	1/4	1/2-24	5/8	.84	.39	3.77	2.13	1/2	.125
394PD-6-6	3/8	11/16-24	13/16	.93	.37	3.48	2.01	11/16	.204

Double End Shut-Off Bulkhead Quick Coupler 394PDSS


(Stainless Steel)

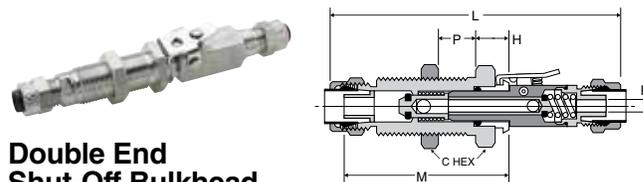

PART NO.	TUBE O.D.	BULKHEAD THREAD	L	M	C HEX	H	P MAX	FLOW DIA. F
394PDSS-4-4	1/4	1/2-24	3.69	2.67	.625	.32	.84	.125
394PDSS-6-6	3/8	11/16-24	3.91	2.24	.812	.34	.93	.203

Single End Shutoff Pipe Connector Quick Coupler 398P


(Chrome Plated)

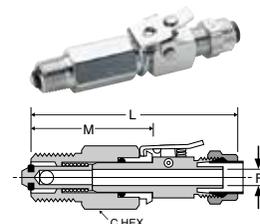

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. F
398P-4-2	1/4	1/8	3/8-24	1/2	2.45	1.32	.125
398P-4-4	1/4	1/4	3/8-24	9/16	2.45	1.32	.125
398P-6-4	3/8	1/4	1/2-24	5/8	2.80	1.46	.203

Single End Shut-Off Connector Quick Coupler 398PSS

(Stainless Steel)

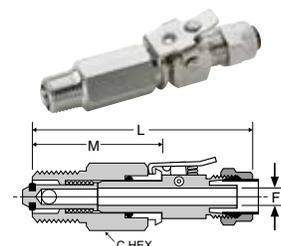


PART NO.	TUBE O.D.	PIPE THREAD	L	M	C HEX	FLOW DIA. F
398PSS-4-2	1/4	1/8	2.30	1.32	.500	.125
398PSS-4-4	1/4	1/4	2.30	1.32	.562	.125
398PSS-6-4	3/8	1/4	2.70	1.43	.625	.203



**Double End Shutoff
Pipe Connector
Quick Coupler 398PD**


(Chrome Plated)

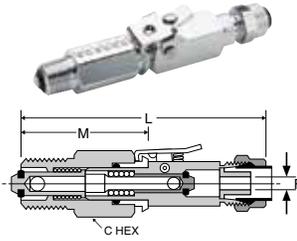

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	M	FLOW DIA. F
398PD-4-2	1/4	1/8	3/8-24	1/2	2.93	1.31	.125
398PD-4-4	1/4	1/4	3/8-24	9/16	2.93	1.32	.125
398PD-6-4	3/8	1/4	1/2-24	5/8	2.88	1.43	.204


**Double End Shut-Off Pipe
Connector Quick Coupler
398PDSS**

(Stainless Steel)

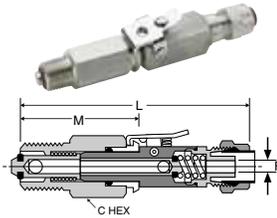


PART NO.	TUBE O. D.	PIPE THREAD	L	M	C HEX	FLOW DIA. D
398PDSS-4-2	1/4	1/8	2.93	1.31	.500	.125
398PDSS-4-4	1/4	1/4	2.93	1.31	.562	.125
398PDSS-6-4	3/8	1/4	3.10	1.43	.625	.125

Male Elbow 169P

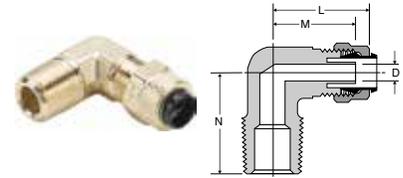


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
169P-4-1	1/4	1/16	3/8-24	.92	.58	.67	.130
169P-4-2	1/4	1/8	3/8-24	.84	.73	.75	.121
169P-4-4	1/4	1/4	3/8-24	.90	.79	.92	.125
169P-4-6	1/4	3/8	3/8-24	.93	.84	1.08	.125
169P-5-2	5/16	1/8	7/16-24	.87	.73	.68	.144
169P-6-2	3/8	1/8	1/2-24	.93	.81	.73	.203
169P-6-4	3/8	1/4	1/2-24	.98	.86	1.05	.203
169P-6-6	3/8	3/8	1/2-24	.98	.86	1.08	.203
169P-8-6	1/2	3/8	11/16-20	1.12	1.04	1.13	.323

Long Male Elbow 169LP

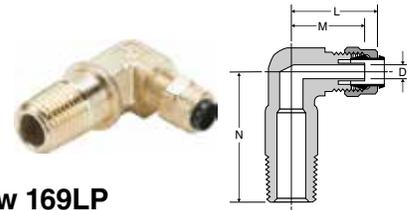


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
169LP-4-4	1/4	1/4	3/8-24	.90	.79	1.38	.125

Union Tee 164P

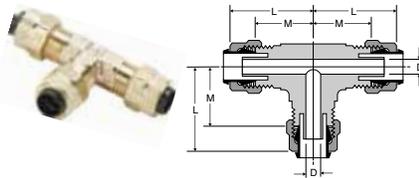


PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	FLOW DIA. D
164P-4	1/4	3/8-24	.84	.73	.125
164P-5	5/16	7/16-24	.83	.73	.144
164P-6	3/8	1/2-24	.98	.86	.203
164P-8	1/2	11/16-20	1.12	1.04	.323

**Union Tee 164P
combination size**

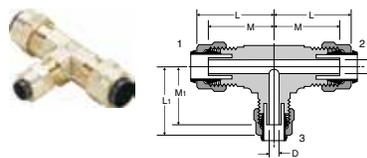


PART NO.	1 TUBE SIZE	2 TUBE SIZE	3 TUBE SIZE	L	L1	M	M1	FLOW DIA. D
164P-6-4	3/8	3/8	1/4	.98	.90	.86	.79	.125

**Male Elbow Swivel
169PS**

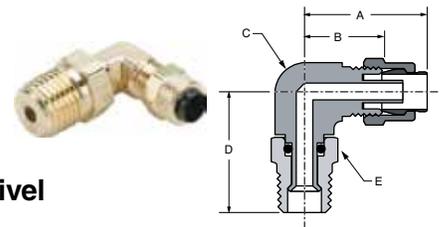


PART NO.	TUBE O. D.	PIPE THREAD	A	B	C HEX	D	E
169PS-4-2	1/4	1/8	.812	.594	.375	.862	.437
169PS-4-4	1/4	1/4	.906	.688	.562	1.218	.562
169PS-6-2	3/8	1/8	.875	.625	.437	.904	.437
169PS-6-4	3/8	1/4	.937	.685	.562	1.218	.562
169PS-6-6	3/8	3/8	.859	.602	.562	1.190	.687
169PS-8-6	1/2	3/8	1.031	.782	.500	1.218	.687



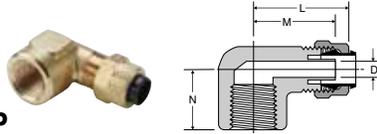


Female Elbow 170P

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA.D
170P-4-2	1/4	1/8	3/8-24	.90	.79	.56	.125
170P-4-4	1/4	1/4	3/8-24	1.00	.89	.69	.125
170P-6-4	3/8	1/4	1/2-24	1.01	.89	.69	.204
170P-8-6	1/2	3/8	11/16-20	1.19	1.11	1.13	.323

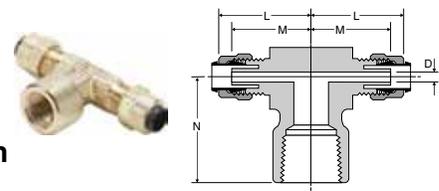


Female Branch Tee 177P

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA.D
177P-4-2	1/4	1/8	3/8-24	.92	.81	.88	.125
177P-4-4	1/4	1/4	3/8-24	.92	.81	1.03	.125
177P-4-6	1/4	3/8	3/8-24	1.03	.92	1.13	.125

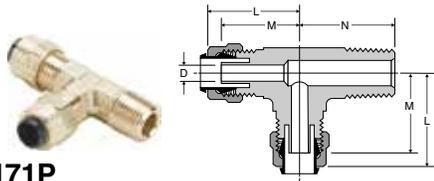


Male Run Tee 171P

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA.D
171P-4-2	1/4	1/8	3/8-24	.84	.73	.72	.125
171P-4-4	1/4	1/4	3/8-24	.92	.81	.92	.125
171P-5-2	5/16	1/8	7/16-24	.83	.73	.72	.144
171P-6-4	3/8	1/4	1/2-24	.98	.86	1.03	.203
171P-8-6	1/2	3/8	11/16-20	1.12	1.04	1.13	.323

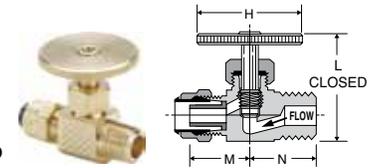


Needle Valve NV311P

PART NO.	TUBE SIZE	PIPE THREAD	H	L OPEN	L CLOSED	M	N
NV311P-4-2	1/4	1/8	1.06	1.36	1.16	.64	.63
NV311P-4-4	1/4	1/4	1.06	1.38	1.18	.64	.72
NV311P-6-4	3/8	1/4	1.06	1.38	1.18	.64	.72

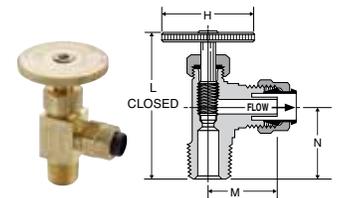

Angle Needle Valve NV312P

PART NO.	TUBE SIZE	PIPE THREAD	H	L OPEN	L CLOSED	M	N
NV312P-4-2	1/4	1/8	1.06	1.70	1.50	.63	.68
NV312P-4-4	1/4	1/4	1.06	2.07	1.82	.71	.86
NV312P-6-4	3/8	1/4	1.06	2.00	1.75	.74	.86

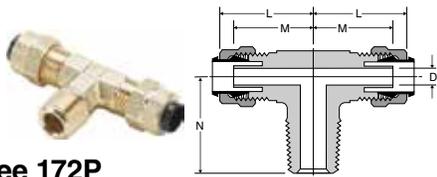

Male Branch Tee 172P

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA.D
172P-4-2	1/4	1/8	3/8-24	.84	.73	.72	.125
172P-4-4	1/4	1/4	3/8-24	.92	.81	.92	.125
172P-5-2	5/16	1/8	7/16-24	.83	.73	.72	.144
172P-6-2	3/8	1/8	1/2-24	.88	.86	.74	.204
172P-6-4	3/8	1/4	1/2-24	.98	.86	1.03	.204
172P-8-6	1/2	3/8	11/16-20	1.12	1.04	1.13	.323





Hi-Duty Flareless Tube Fittings

MATERIALS OF CONSTRUCTION	
FITTING:	BRASS
NUT:	BRASS
SLEEVE:	BRASS

NOMENCLATURE	
EXAMPLE: 169HD-6-4	ATTRIBUTE:
1	FORGING
69	MALE ELBOW
HD	HI-DUTY
6	3/8" TUBE O.D.
4	1/4" PIPE THREAD

APPLICABLE TUBE	
TUBE MATERIAL:	<ul style="list-style-type: none"> COPPER, BRASS, SEAMLESS STEEL, THERMOPLASTIC TUBING STEEL TUBING MUST BE COLD DRAWN AND ANNEALED SEAMLESS LOW-CARBON PER SAE J524 WITH A MAXIMUM HARDNESS OF ROCKWELL B 65.
TUBE O.D.:	1/8, 3/16, 1/4, 5/16, 3/8, 1/2, 5/8

MAXIMUM RECOMMENDED WORKING PRESSURE	
TUBE O.D.	PSI
1/8	4,300
3/16	2,850
1/4	2,100
5/16	1,800
3/8	1,500
1/2	1,150
5/8	1,000

SPECIFICATIONS	
OPERATING FLUID:	WATER, AIR, INERT AND NON-COMBUSTIBLE GASSES COMPATIBLE WITH MATERIALS OF CONSTRUCTION
NOTE:	FOR OTHER TYPES OF FLUIDS OR GASSES, PLEASE CONSULT FACTORY




A preassembled brass fitting, with sleeve machined onto nut. During assembly sleeve breaks away from nut and creates a seal on the tubing. No flaring, soldering or other tube preparation of tubing is necessary.

Assembly Instructions


1. Cut tube squarely and cleanly removing all burrs.
2. Grasp fitting. Do not remove nut.
3. Insert tube in fitting through nut until tube seats firmly against tube shoulder in body.
4. Grip tube firmly to prevent turning and tighten nut to finger-tight. Continue to tighten nut for one and three-quarter additional turns (one and one-half turns for 1/2" size tube fittings) for a positive, leak proof seal. During tightening a slight "give" will be felt. This "give" indicates the sleeve has been sheared from the nut. It is not necessary to tighten the nut all the way down.



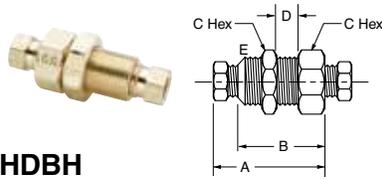


Bulkhead Union 62HDBH

PART NO.	TUBE SIZE	MIN. ORIFICE SIZE	A	B	C	D	E
62HDBH-2	1/8	.093	1.781	1.156	.562	.625	7/16-24
62HDBH-4	1/4	.187	1.968	1.156	.687	.625	9/16-24

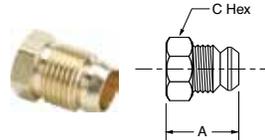


Nut/Sleeve 61HD

PART NO.	TUBE SIZE	PIPE THREAD	A	C
61HD-2	1/8	5/16-24	.656	.312
61HD-3	3/16	3/8-24	.687	.375
61HD-4	1/4	7/16-24	.734	.437
61HD-5	5/16	1/2-20	.765	.500
61HD-6	3/8	9/16-20	.843	.562
61HD-8	1/2	1 1/16-16	.921	.688
61HD-10	5/8	7/8-18	1.078	.875

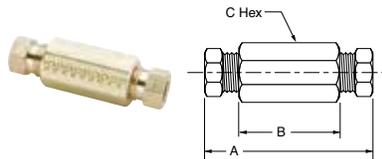


Union 62HD

PART NO.	TUBE SIZE	MIN. ORIFICE SIZE	A	B	C
62HD-2	1/8	.093	1.687	1.062	.375
62HD-3	3/16	.125	1.781	1.031	.437
62HD-4	1/4	.187	1.906	1.093	.562
62HD-6	3/8	.312	2.187	1.375	.625
62HD-8	1/2	.437	2.437	1.562	.812
62HD-10	5/8	.500	2.937	1.812	1.062

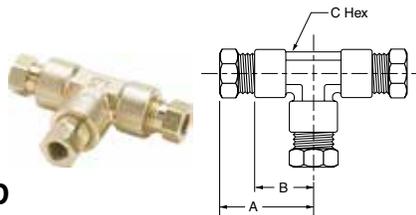


Union Tee 164HD

PART NO.	TUBE SIZE	MIN. ORIFICE SIZE	A	B	C HEX
164HD-4	1/4	.187	1.082	.687	.500
164HD-6	3/8	.312	1.357	.970	.562
164HD-8	1/2	.437	1.481	1.060	.750

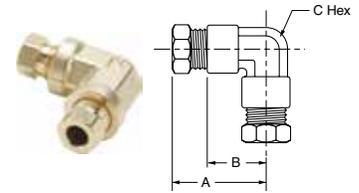


Union Elbow 165HD

PART NO.	TUBE SIZE	MIN. ORIFICE SIZE	A	B	C HEX
165HD-4	1/4	.187	1.084	.690	.552
165HD-6	3/8	.312	1.376	.970	.615
165HD-8	1/2	.437	1.546	1.060	.750

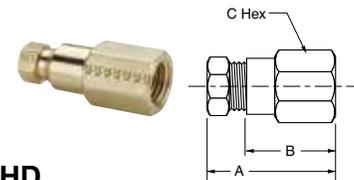


Female Connector 66HD

PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX
66HD-2-2	1/8	1/8	.093	1.312	1.000	.500
66HD-4-2	1/4	1/8	.187	1.406	1.000	.562
66HD-4-4	1/4	1/4	.187	1.593	1.187	.687
66HD-6-2	3/8	1/8	.312	1.531	1.125	.625
66HD-6-4	3/8	1/4	.312	1.718	1.312	.625
66HD-6-6	3/8	3/8	.312	1.750	1.343	.812

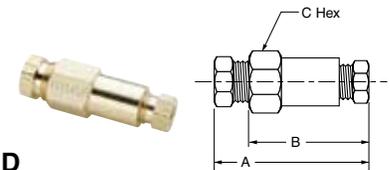


Reducing Union 62HD

PART NO.	TUBE SIZE	MIN. ORIFICE SIZE	A	B	C HEX
62HD-6-4	3/8 X 1/4	.187	2.000	1.187	.625
62HD-8-4	1/2 X 1/4	.187	2.125	1.281	.812
62HD-8-6	1/2 X 3/8	.312	2.656	1.406	.812

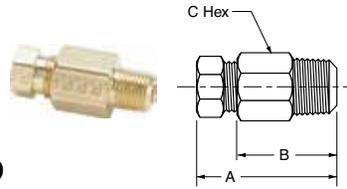


Male Connector 68HD

PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX
68HD-2-2	1/8	1/8	.093	1.062	.750	.437
68HD-3-2	3/16	1/8	.125	1.140	.765	.437
68HD-4-2	1/4	1/8	.187	1.343	.937	.562
68HD-4-4	1/4	1/4	.187	1.468	1.062	.562
68HD-4-6	1/4	3/8	.187	1.343	.937	.687
68HD-4-8	1/4	1/2	.187	1.531	1.125	.875
68HD-5-2	5/16	1/8	.218	1.406	1.000	.562
68HD-5-4	5/16	1/4	.218	1.500	1.093	.562
68HD-6-2	3/8	1/8	.218	1.531	1.125	.625
68HD-6-4	3/8	1/4	.312	1.656	1.250	.625
68HD-6-6	3/8	3/8	.312	1.531	1.125	.687
68HD-6-8	3/8	1/2	.312	1.531	1.125	.875
68HD-8-4	1/2	1/4	.312	1.813	1.375	.812
68HD-8-6	1/2	3/8	.406	1.750	1.312	.812
68HD-8-8	1/2	1/2	.437	1.812	1.375	.875
68HD-8-12	1/2	3/4	.437	1.625	1.187	1.062
68HD-10-6	5/8	3/8	.406	2.031	1.468	1.062
68HD-10-8	5/8	1/2	.500	2.156	1.593	1.062

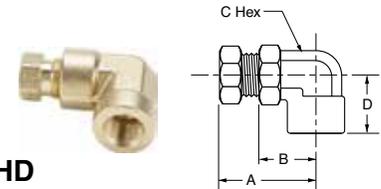


Female Elbow 170HD

PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX	D
170HD-2-2	1/8	1/8	.093	1.005	.690	.500	.750
170HD-4-2	1/4	1/8	.187	1.084	.687	.500	.750
170HD-4-4	1/4	1/4	.187	1.234	.843	.562	.875
170HD-6-2	3/8	1/8	.312	1.281	.875	.562	.937
170HD-6-4	3/8	1/4	.312	1.376	.970	.615	1.093
170HD-6-6	3/8	3/8	.312	1.526	1.120	.690	1.150
170HD-8-6	1/2	3/8	.437	1.481	1.062	.740	1.281

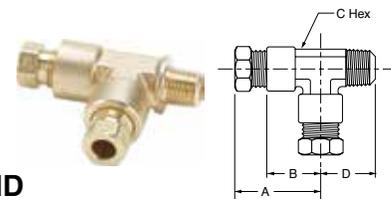


Male Run Tee 171HD

PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX	D
171HD-4-2	1/4	1/8	.187	1.144	.750	.500	.780
171HD-4-4	1/4	1/4	.187	1.207	.812	.500	.937
171HD-6-4	3/8	1/4	.312	1.376	.970	.562	1.000

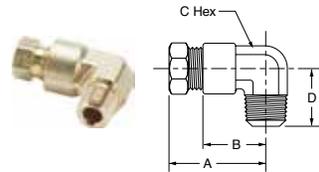


Male Elbow 169HD

PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX	D
169HD-2-2	1/8	1/8	.093	.975	.656	.438	.720
169HD-3-2	3/16	1/8	.125	1.056	.687	.437	.750
169HD-4-2	1/4	1/8	.187	1.084	.687	.500	.750
169HD-4-4	1/4	1/4	.187	1.144	.750	.500	.937
169HD-5-2	5/16	1/8	.218	1.144	.750	.562	.810
169HD-5-4	5/16	1/4	.250	1.206	.812	.562	1.000
169HD-6-2	3/8	1/8	.218	1.281	.875	.562	.875
169HD-6-4	3/8	1/4	.312	1.281	.875	.562	1.000
169HD-6-6	3/8	3/8	.312	1.376	.970	.615	1.031
169HD-6-8	3/8	1/2	.312	1.526	1.120	.687	1.310
169HD-8-4	1/2	1/4	.312	1.421	1.000	.678	1.062
169HD-8-6	1/2	3/8	.406	1.421	1.000	.678	1.062
169HD-8-8	1/2	1/2	.437	1.481	1.060	.740	1.420
169HD-10-6	5/8	3/8	.406	1.818	1.270	.875	1.340
169HD-10-8	5/8	1/2	.500	1.818	1.270	.875	1.480

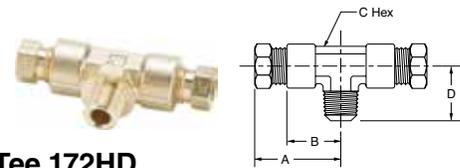

Male Branch Tee 172HD


PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX	D
172HD-4-2	1/4	1/8	.187	1.082	.687	.500	.780
172HD-4-4	1/4	1/4	.187	1.269	.875	.500	.937
172HD-6-6	3/8	3/8	.312	1.406	1.000	.562	1.125

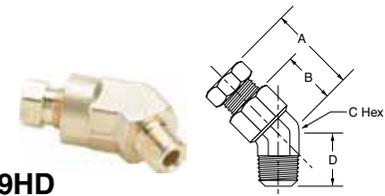

45° Male Elbow 179HD


PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX	D
179HD-4-2	1/4	1/8	.187	1.093	.687	.562	.750
179HD-6-4	3/8	1/4	.280	1.138	.710	.550	.850



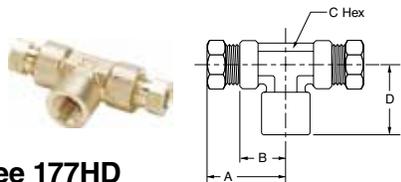

Female Branch Tee 177HD

PART NO.	TUBE SIZE	PIPE THREAD	MIN. ORIFICE SIZE	A	B	C HEX	D
177HD-4-2	1/4	1/8	.187	1.082	.687	.500	.750
177HD-4-4	1/4	1/4	.187	1.144	.750	.562	1.093
177HD-6-4	3/8	1/4	.312	1.376	.970	.562	1.093

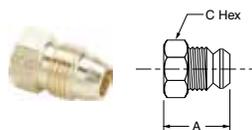

Plug 59HD

PART NO.	TUBE SIZE	A	C
59HD-4	1/4	.734	.437
59HD-6	3/8	.843	.625



