

**Part No:** 801-663F

**Fabricated Fittings**

**Tees**

**Desc:** 12X3 PVC RED TEE SOC SCH80 FAB

**MSRP:** 1472.89

**Part Code:** 083

**Weight(lbs):** 37.062

**Weight(kg):** 16.811

**Weight(gm):** 16811

**Size:** 12"X12"X3"


**Color:** GRAY

**Material:** PVC

**Schedule** Schedule 80

**Connection** Socket X Socket X Socket

**Type** Reduction

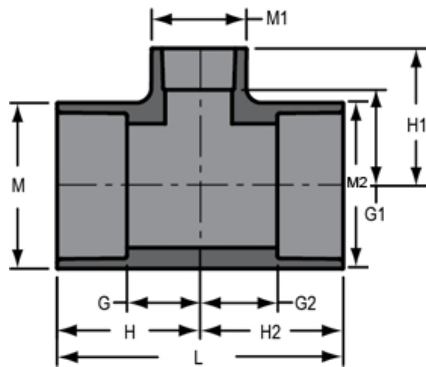

|                     |                     |                    |                    |                      |
|---------------------|---------------------|--------------------|--------------------|----------------------|
| <b>G</b> = 5- 1/4   | <b>G1</b> = 8- 9/16 | <b>G2</b> = 5- 1/4 | <b>H</b> = 11- 1/2 | <b>H1</b> = 10-13/16 |
| <b>M2</b> = 14- 1/8 | <b>H2</b> = 11- 1/2 | <b>L</b> = 23      | <b>M</b> = 14- 1/8 | <b>M1</b> = 4- 1/8   |

## Fabricated Dimension References:

**G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/4 & larger ± 1/2 inch.

**H** = Intersection of center lines to face of fitting; 90° elbows, tees, crosses; ± 1/4 inch.; wyes ± 1/2 inch; 14" & larger inch.

**J** = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/4 inch; 14" & larger ± 1/2 inch.

**L** = Overall length of fittings; ± 1/2 inch; wyes ± 1 inch; 14" & larger ± 1 inch.

**M** = Outside diameter of socket/thread hub; ± 1/4 inch.

**N** = Socket bottom to socket bottom; couplings; ± 1/2 inch.

**W** = Height of cap; ± 1/4 inch.

## Typical Fabricated Dimension References

